



Cisco

Exam Questions 300-620

Implementing Cisco Application Centric Infrastructure (DCACI)

NEW QUESTION 1

An ACI administrator notices a change in the behavior of the fabric. Which action must be taken to determine if a human intervention introduced the change?

- A. Inspect event records in the APIC UI to see all actions performed by users.
- B. Inspect /var/log/audit_messages on the APIC to see a record of all user actions.
- C. Inspect audit logs in the APIC UI to see all user events.
- D. Inspect the output of show command history in the APIC CLI.

Answer: A

NEW QUESTION 2

Which components must be configured for the BGP Route Reflector policy to take effect?

- A. spine fabric interface overrides and profiles
- B. access policies and profiles
- C. pod policy groups and profiles
- D. leaf fabric interface overrides and profiles

Answer: A

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/4-x/L3-configuration/Cisco-APIC-Layer-3-Networking-Configuration-Guide-401/Cisco-APIC-Layer-3-Networking-Configuration-Guide-401_chapter_01.html

NEW QUESTION 3

Which type of profile needs to be created to deploy an access port policy group?

- A. attachable entity
- B. Pod
- C. module
- D. leaf interface

Answer: A

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/Operating_ACI/guide/b_Cisco_Operating_ACI/b_Cisco_Operating_ACI_chapter_0110.html

NEW QUESTION 4

A situation causes a fault to be raised on the APIC. The ACI administrator does not want that fault to be raised because it is not directly relevant to the environment. Which action should the administrator take to prevent the fault from appearing?

- A. Under System -> Faults, right-click on the fault and select Acknowledge Fault so that acknowledged faults will immediately disappear.
- B. Create a stats threshold policy with both rising and falling thresholds defined so that the critical severity threshold matches the squelched threshold.
- C. Under System -> Faults, right-click on the fault and select Ignore Fault to create a fault severity assignment policy that hides the fault.
- D. Create a new global health score policy that ignores specific faults as identified by their unique fault code.


Answer: C

NEW QUESTION 5

DRAG DROP

An engineer is configuring a VRF for a tenant named Cisco. Drag and drop the child objects on the left onto the correct containers on the right for this configuration.

- Application profile
- Bridge domain
- EPG
- VRF

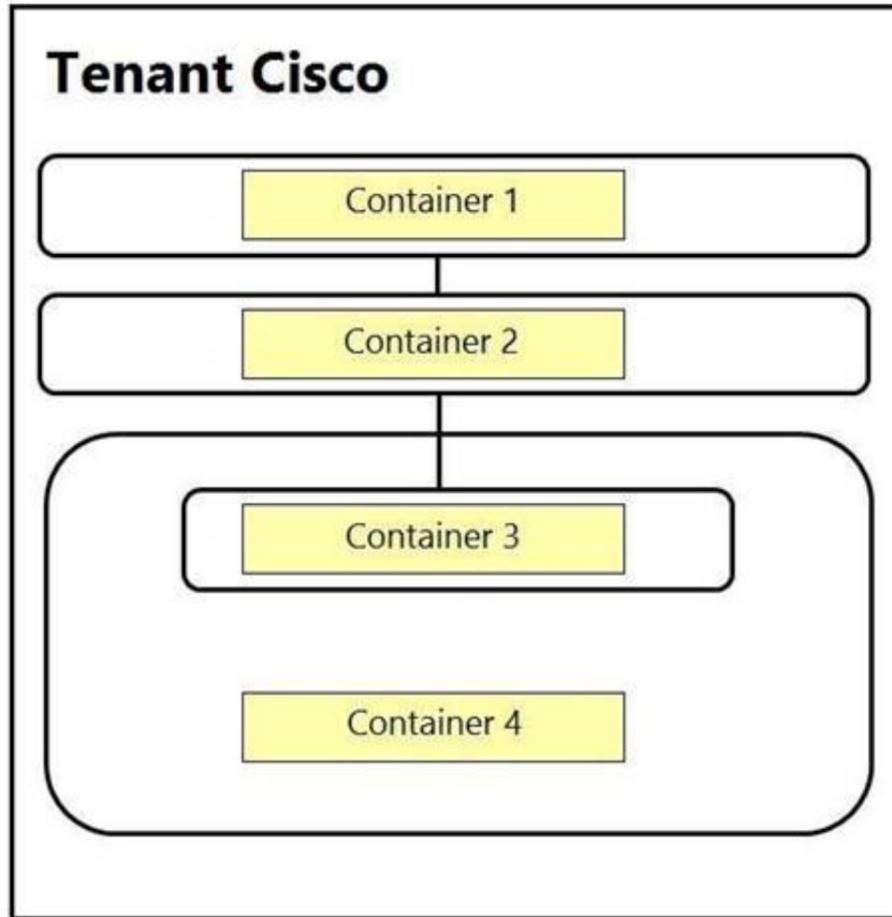


- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

- Application profile
- Bridge domain
- EPG
- VRF

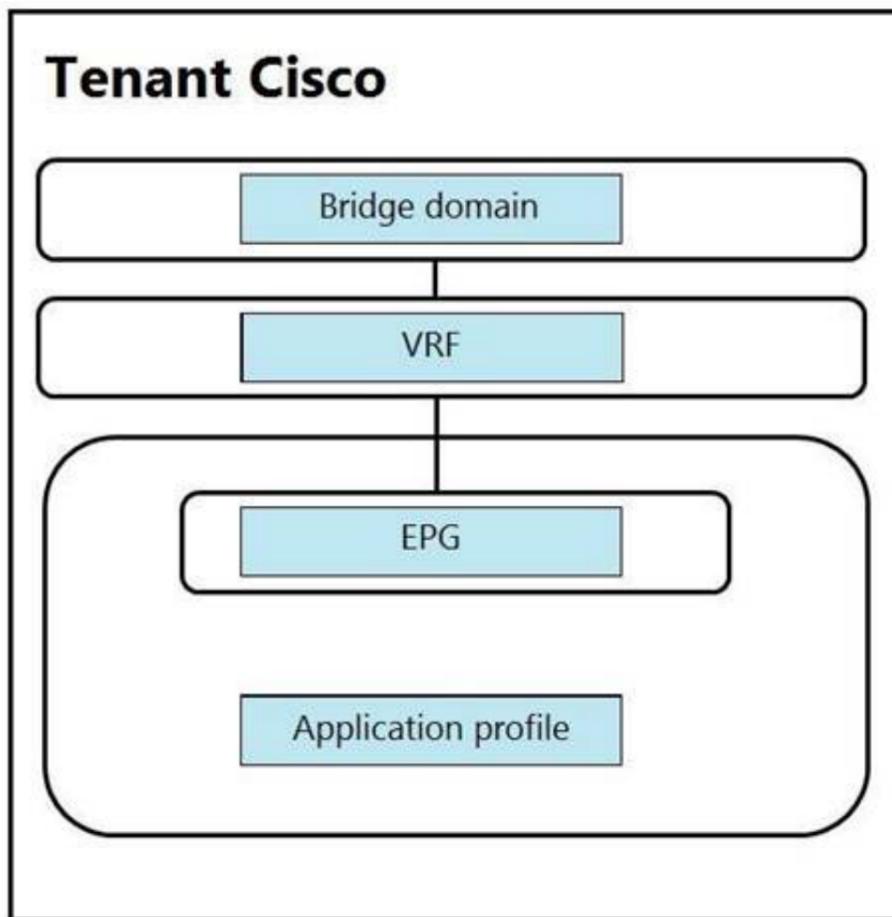

NEW QUESTION 6

An engineer is implementing Cisco ACI at a large platform-as-a-service provider using APIC controllers, 9396PX leaf switches, and 9336PQ spine switches. The leaf switch ports are configured as IEEE 802.1p ports. Where does the traffic exit from the EPG in IEEE 802.1p mode in this configuration?

- A. from leaf ports tagged as VLAN 0
- B. from leaf ports untagged
- C. from leaf ports tagged as VLAN 4094
- D. from leaf ports tagged as VLAN 1

Answer: A

NEW QUESTION 7

Which description regarding the initial APIC cluster discovery process is true?

- A. The APIC uses an internal IP address from a pool to communicate with the nodes.
- B. Every switch is assigned a unique AV by the APIC.
- C. The APIC discovers the IP address of the other APIC controllers by using Cisco Discovery Protocol.
- D. The ACI fabric is discovered starting with the spine switches.


Answer: C

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/aci-fundamentals/b_ACI-Fundamentals/b_ACI-Fundamentals_chapter_010011.html

NEW QUESTION 8

Refer to the exhibit.

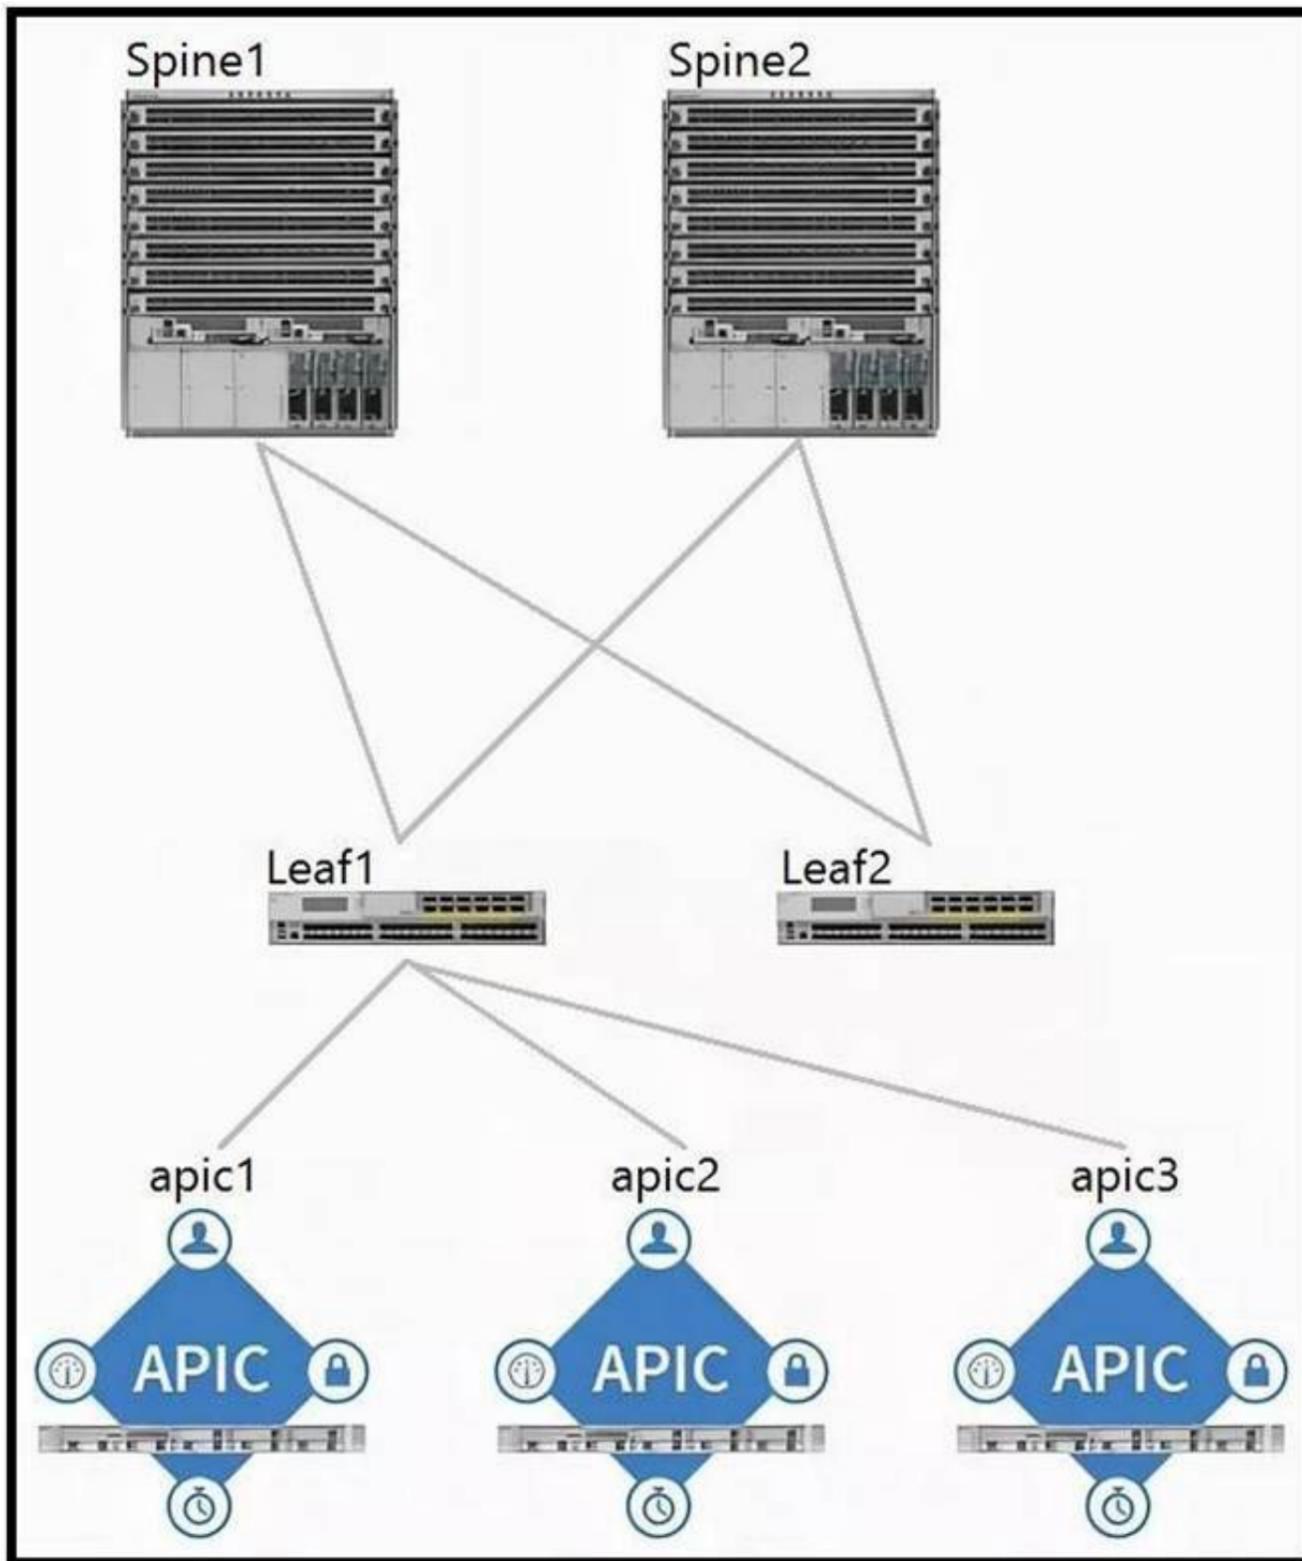

Which two components should be configured as route reflectors in the ACI fabric? (Choose two.)

- A. Spine1
- B. apic1
- C. Spine2
- D. Leaf1
- E. Leaf2
- F. apic2

Answer: AC

NEW QUESTION 9

Which table holds IP address, MAC address and VXLAN/VLAN information on a Cisco ACI leaf?

- A. endpoint
- B. adjacency
- C. RIB
- D. ARP

Answer: A

Explanation:

Reference: <https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c11-739989.html>

NEW QUESTION 10

An engineer is extending an EPG out of the ACI fabric using static path binding. Which statement about the endpoints is true?

- A. Endpoints must connect directly to the ACI leaf port.
- B. External endpoints are in a different bridge domain than the endpoints in the fabric.
- C. Endpoint learning encompasses the MAC address only.
- D. External endpoints are in the same EPG as the directly attached endpoints.

Answer: C

NEW QUESTION 10

An engineer configured a bridge domain with the hardware-proxy option for Layer 2 unknown unicast traffic. Which statement is true about this configuration?

- A. The leaf switch drops the Layer 2 unknown unicast packet if it is unable to find the MAC address in the local forwarding tables.
- B. The Layer 2 unknown hardware proxy lacks support of the topology change notification.
- C. The leaf switch forwards the Layers 2 unknown unicast packets to all other leaf switches if it is unable to find the MAC address in its local forwarding tables.
- D. The spine switch drops the Layer 2 unknown unicast packet if it is unable to find the MAC address in the proxy database.

Answer: A

NEW QUESTION 13

Which action sets Layer 2 loop migration in an ACI Fabric with a Layer 2 Out configured?

- A. Enable MCP on the ACI fabric.
- B. Disable STP in the external network.
- C. Disable STP on the ACI fabric.
- D. Enable STP on the ACI fabric.

Answer: A

NEW QUESTION 17

An engineer is implementing a connection that represents an external bridged network. Which two configurations are used? (Choose two.)

- A. Layer 2 remote fabric
- B. Layer 2 outside
- C. Layers 2 internal
- D. Static path binding
- E. VXLAN outside

Answer: AB

NEW QUESTION 19

When Cisco ACI connects to an outside Layers 2 network, where does the ACI fabric flood the STP BPDU frame?

- A. within the bridge domain
- B. within the APIC
- C. within the access encap VLAN
- D. between all the spine and leaf switches

Answer: A

Explanation:

Reference: https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c07-732033.html#_Toc395143571

NEW QUESTION 21

Which two dynamic routing protocols are supported when using Cisco ACI to connect to an external Layer 3 network? (Choose two.)

- A. iBGP
- B. VXLAN
- C. IS-IS
- D. RIPv2
- E. eBGP


Answer: AE

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/ACI_Best_Practices/b_ACI_Best_Practices/b_ACI_Best_Practices_chapter_010010.html

NEW QUESTION 24

Refer to the exhibit.

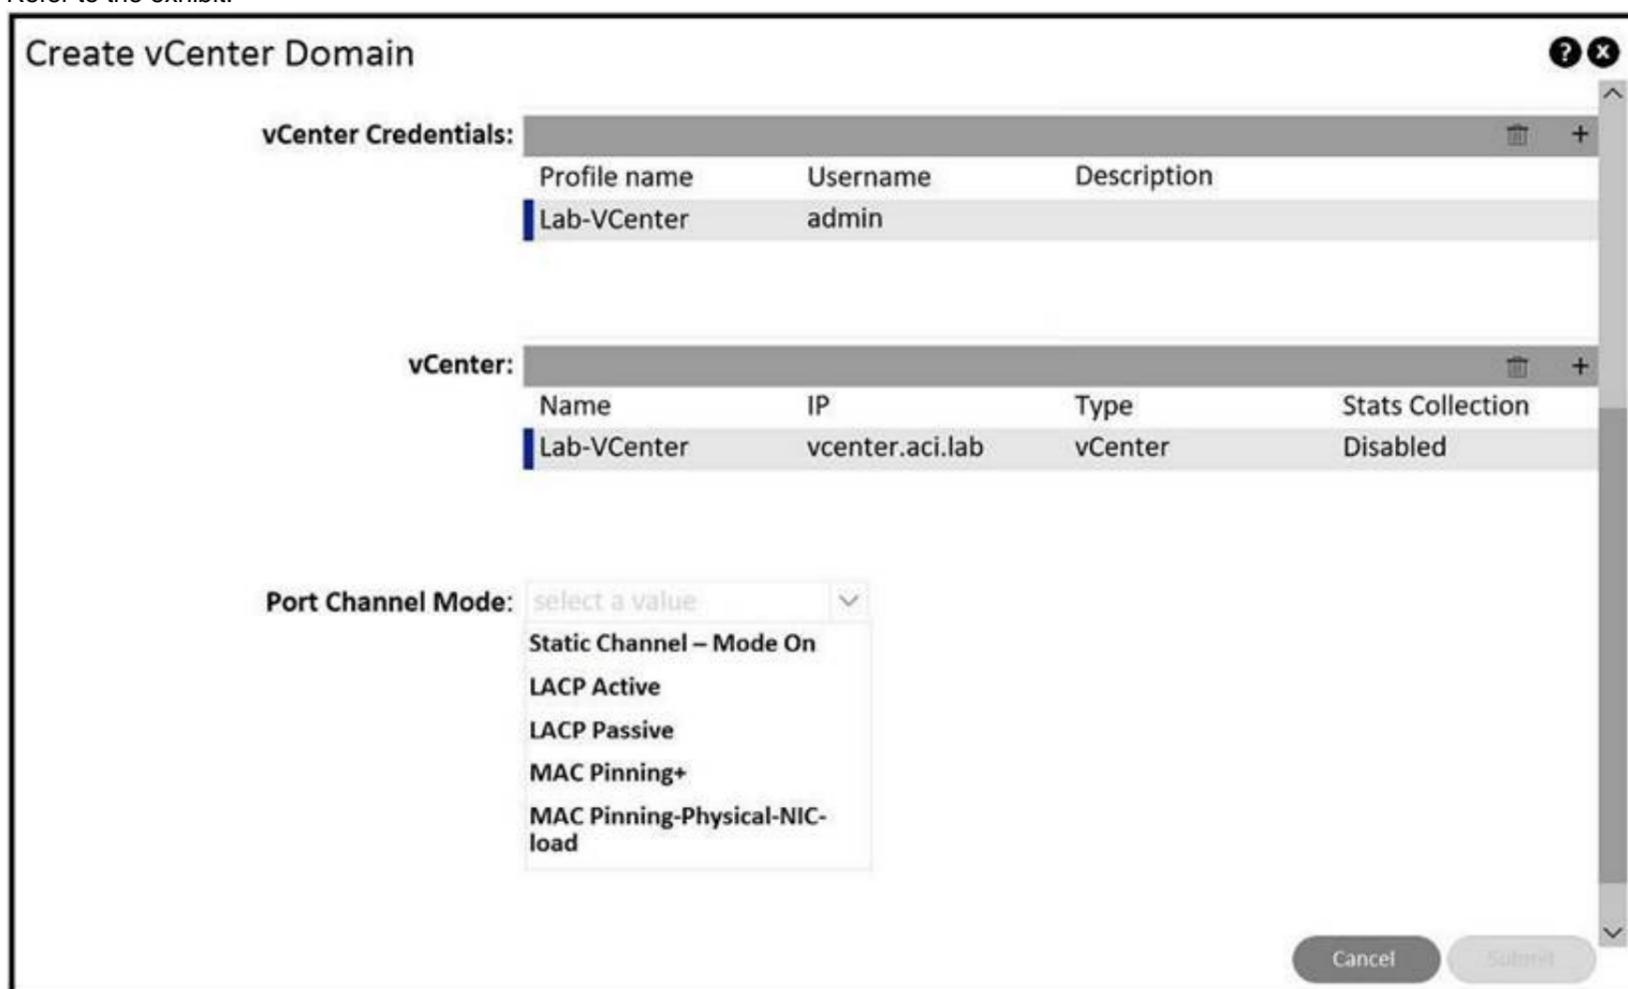

An engineer is implementing Cisco ACI – VMware vCenter integration for a blade server that lacks support of bonding. Which port channel mode results in “route based on originating virtual port” on the VMware VDS?

- A. Static Channel – Mode On
- B. MAC Pinning-Physical-NIC-load
- C. LACP Passive
- D. MAC Pinning+
- E. LACP Active

Answer: D

NEW QUESTION 28

When configuring Cisco ACI VMM domain integration with VMware vCenter, which object is created in vCenter?

- A. datacenter
- B. VMware vSphere Standard vSwitch
- C. VMware vSphere Distributed Switch
- D. cluster

Answer: C

NEW QUESTION 31

An engineer has set the VMM resolution immediacy to pre-provision in a Cisco ACI environment. No Cisco Discovery Protocol neighborhood has been formed between the hypervisors and the ACI fabric leaf nodes. How does this affect the download policies to the leaf switches?

- A. No policies are downloaded because LLDP is the only supported discovery protocol.
- B. Policies are downloaded when the hypervisor host is connected to the VMM VDS.
- C. Policies are downloaded to the ACI leaf switch regardless of Cisco Discovery Protocol neighborhood.
- D. No policies are downloaded because there is no discovery protocol neighborhood.

Answer: C

NEW QUESTION 32

What represents the unique identifier of an ACI object?

- A. universal resource identifier (URI)
- B. application programming interface
- C. management information tree
- D. distinguished name

Answer: D

Explanation:

Reference: <https://www.slideshare.net/CiscoDevNet/introduction-to-aci-apis>

NEW QUESTION 33

Which statement about ACI syslog is true?

- A. Notifications for different scopes of syslog objects can be sent only to one destination.
- B. Syslog messages are sent to the destination through the spine.
- C. All syslog messages are sent to the destination through APIC.
- D. Switches send syslog messages directly to the destinations.

Answer: A

Explanation:

Reference: <https://www.ciscolive.com/c/dam/r/ciscolive/us/docs/2016/pdf/BRKACI-2303.pdf>

NEW QUESTION 38

Which attribute should be configured for each user to enable RADIUS for external authentication in Cisco ACI?

- A. cisco-security domain
- B. cisco-auth-features
- C. cisco-aci-role
- D. cisco-av-pair

Answer: D

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/Security_config/b_Cisco_APIC_Security_Configuration_Guide/b_Cisco_API_C_Security_Guide_chapter_01011.html

NEW QUESTION 42

Which statement regarding ACI Multi-Pod and TEP pool is true?

- A. The IP addresses used in the IPN network can overlap TEP pool of the APIC.
- B. A different TEP pool must be assigned to each Pod.
- C. The Pod1 TEP pool must be split and a portion of the TEP pool allocated to each Pod.
- D. The same TEP pool is used in all Pods.

Answer: B

Explanation:

Reference: <https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c11-739714.html>

NEW QUESTION 46

Which two statements regarding ACI Multi-Site are true? (Choose two.)

- A. The Multi-Site orchestrator must be directly attached to one ACI leaf.
- B. Routers in the Inter-Site network must run OSPF, DHCP relay, and MP-BGP.
- C. ACI Multi-Site is a solution that supports a dedicated APIC cluster per site.
- D. ACI Multi-Site is a solution that allows one APIC cluster to manage multiple ACI sites.
- E. The Inter-Site network routers should run OSPF to establish peering with the spines.

Answer: AE

NEW QUESTION 49

What are two requirements for the IPN network when implementing a Multi-Pod ACI fabric? (Choose two.)

- A. EIGRP routing
- B. PIM ASM multicast routing
- C. BGP routing
- D. VLAN ID 4
- E. OSPF routing

Answer: AE

NEW QUESTION 52

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

300-620 Practice Exam Features:

- * 300-620 Questions and Answers Updated Frequently
- * 300-620 Practice Questions Verified by Expert Senior Certified Staff
- * 300-620 Most Realistic Questions that Guarantee you a Pass on Your First Try
- * 300-620 Practice Test Questions in Multiple Choice Formats and Updates for 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 300-620 Practice Test Here](#)