

Exam Questions 3V0-21.21

Advanced Design VMware vSphere 7.x

<https://www.2passeasy.com/dumps/3V0-21.21/>



NEW QUESTION 1

Which requirement would be classified as a functional requirement within the design documentation?

- A. The system must perform virtual machine backups through an API.
- B. Virtual machines must be patched within one month of the patch release date.
- C. Virtual machines must be restarted within 30 minutes of a host failure.
- D. The system must be able to scale to support 500 concurrent virtual machines.

Answer: C

NEW QUESTION 2

An architect is reviewing a physical storage design. The customer has specified that storage DRS will be used for ease of operational management for capacity and performance.

Which recommendation should the architect include in the design?

- A. Create smaller datastores to balance space with Storage DRS
- B. Use a larger number of storage profiles (varied disk speeds and RAID levels) to improve performance
- C. Create larger datastores to balance space with Storage DRS
- D. Create more datastores within each Storage DRS cluster to balance space and performance

Answer: D

NEW QUESTION 3

An architect is designing a VMware solution for a customer based on the following information:

- The solution must support the ability to migrate workloads between hosts within a cluster.
- The solution must support resource management priorities.
- The solution must support the ability to connect virtual machines directly to LUNs.
- The solution should use existing IPv4 based network infrastructure.
- There is no budget for additional physical hardware.

Which two design decisions could the architect make to meet these requirements? (Choose two.)

- A. The ESXi hosts will leverage Fibre Channel (FC)
- B. The ESXi hosts will leverage NFS 3
- C. The ESXi hosts will leverage Fibre Channel over Ethernet (FCoE)
- D. The ESXi hosts will leverage iSCSI
- E. The ESXi hosts will leverage NFS 4.1

Answer: BD

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.storage.doc/GUID-8A929FE4-1207-4C> Starting from vSphere 7.0, VMware no longer supports software FCoE in production environments.

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.storage.doc/GUID-6B49866F-7005-40>

NEW QUESTION 4

An organization's existing vSphere environments are configured for Enhanced Linked Mode. The DevOps team automates the creation of hardened virtual machine images for various operating systems. Their continuous integration/continuous delivery (CI/CD) pipeline runs a task at the end of a successful build, which uploads the Open Virtualization Format (OVF) image to a sandbox content library, deploys a virtual machine from the image, and then destroys these objects after quality checks are complete.

The following requirements have been noted:

- All content libraries and images must be centrally created and managed.
- All images must be capable of being updated.
- All images must be refreshed and available to subscribed libraries within 24 hours.
- All images must provide details of the image contents and versions.
- All images must be capable of being reverted to a previous version.
- All images must be capable of having the hardware and guest operating system customized during deployment.

Which three recommendations should the architect make to design a content library solution that will meet these requirements? (Choose three.)

- A. Create a local content library in the primary vSphere environment and enable publishing.
- B. Create and publish a new subscription to a new subscriber library for each target vSphere environment.
- C. Deploy the OVF images to vSphere and clone as an OVF template to a local content library.
- D. Deploy the OVF images to vSphere and clone as a VM template to a local content library.
- E. Edit the Auto Sync Refresh Interval advanced setting for each subscribed library.
- F. Add a new subscriber library from each vSphere environment.

Answer: ACF

NEW QUESTION 5

An architect is designing a new vSphere platform for a customer to meet the following requirements:

- The platform must be deployed into five physically separate sites.
- The sites are spread across multiple regions.
- Some sites require more than one vCenter Server.

➤ The platform must provide an administrator with the ability to access virtual infrastructure components across all sites from a single management tool instance. Which single sign-on (SSO) design recommendation will meet these requirements?

- A. Use an SSO domain across all vCenter Server instances
- B. Use an SSO domain per region
- C. Use an SSO domain per vCenter Server instance
- D. Use an SSO domain per site

Answer: C

NEW QUESTION 6

During a requirements gathering workshop, the customer's Chief Information Security Office (CISO) provides the following requirements that are pertinent to the design of a new vSphere environment:

- All operating system critical patches must be installed within 24 hours of release.
- All virtual machine templates must be updated every three months in line with company policy.

Which requirement classification is being gathered for the design documentation?

- A. Security
- B. Manageability
- C. Recoverability
- D. Availability

Answer: A

Explanation:

This is lifecycle management function. The requirement is system critical patches, not system security patches.

NEW QUESTION 7

An architect is designing a new vSphere environment to meet the following requirements:

- The environment must support 5,000 virtual machines.
- The environment will be built initially using 350 hosts.

Which vCenter Server appliance deployment size should the architect specify for the design?

- A. Large
- B. Small
- C. Tiny
- D. Medium

Answer: A

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vcenter.install.doc/GUID-077C7523-E0EA-492>

NEW QUESTION 8

During a requirements gathering workshop, the customer provides the following requirement:

- A new vSphere platform must be designed securely and all interfaces must be protected against potential snooping.

How should this non-functional security requirement be documented?

- A. Interfaces must be audited.
- B. Encrypted channels must be used for all communications.
- C. Unauthorized access to interfaces must be reported within 15 minutes.
- D. Communications must be through Private VLANs (PVLAN).

Answer: A

NEW QUESTION 9

Which design decision must be included in a design to allow for the deployment of a minimum supported configuration of vCenter High Availability (HA)?

- A. A new subnet will be provisioned for vCenter HA services
- B. A vSphere cluster will consist of more than three nodes
- C. The deployed vCenter Server will be Tiny
- D. The vCenter HA network will support a latency of less than 50 ms

Answer: A

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.avail.doc/GUID-8FD87389-8CC9-429>

NEW QUESTION 10

An architect is designing a new backup solution for a vSphere platform that has been recently upgraded to vSphere 7.

The architect wants the backup solution to perform the following:

- Full virtual machine image backup and restore
- Incremental virtual machine image backup and restore
- File level backup and restore within both Windows and Linux virtual machines
-

LAN-free backup

Which functional requirement should the architect include in the design of the new backup solution?


- A. The backup solution must leverage the VMware Consolidated Backup (VCB) framework.
- B. The backup solution must leverage virtual machine snapshots.
- C. The backup solution must leverage VMware vSphere Storage APIs - Data Protection.
- D. The backup solution must leverage VMware vStorage APIs for Data Protection (VADP).

Answer: C

NEW QUESTION 10

Refer to the exhibit.

During a requirements gathering workshop, a customer shares the following diagram regarding their availability service-level agreements (SLAs):

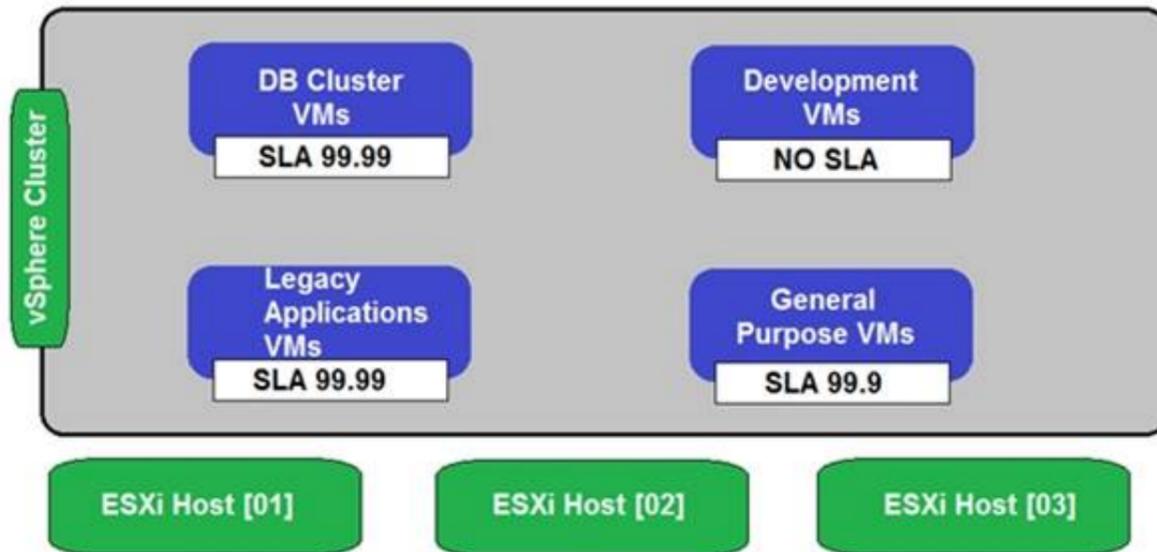

The customer states that there is no application level availability for legacy applications.

Which recommendation could the architect make to meet the customer's high availability requirements for the legacy applications virtual machines?

- A. Enable vSphere HA and add a VM Override with VM Restart Priority set to Disabled
- B. Enable Fault Tolerance
- C. Achieve application availability with snapshots
- D. Enable vSphere HA and add a VM Override with VM Restart Priority set to Lowest

Answer: D

NEW QUESTION 14

The Chief Operating Officer (COO) at an organization raises concerns that their virtual infrastructure environment is vulnerable. Recently, a security-related issue with a virtual machine caused all management services to become unavailable. No budget is available in the short term for additional platform investment. An architect is asked to review the current environment and make recommendations to mitigate concerns.

A virtualization administrator has provided the following details:

- > There is a single four node cluster of ESXi servers
- > There are two, Layer 2, physical network switches connecting resources
- > The data center network is presented as a single /16 subnet

Given the information provided, which functional requirement should the architect include in the design to mitigate the COOs concerns?

- A. The virtual infrastructure environment must connect application virtual machines and management services to new physical network switches
- B. The virtual infrastructure environment must connect application virtual machines and management services to separate distributed virtual switches (DVS)
- C. The virtual infrastructure environment must connect application virtual machines and management services to separate VLANs
- D. The virtual infrastructure environment must connect management services to a vSphere standard switch (VSS)

Answer: D

NEW QUESTION 17

An architect is considering placement of virtual machines within an existing VMware software-defined data center (SDDC).

During the discovery phase, the following information is documented:

Cluster One

- Six ESXi hosts
- vSphere HA with host failures cluster tolerates = 1
- Proactive HA is enabled and set to automated
- Fully Automated vSphere DRS
- Transparent Page Sharing (TPS) is enabled

Cluster Two

- Eight ESXi hosts
- vSphere HA with host failures cluster tolerates = 1
- Proactive HA is disabled
- Partially Automated vSphere DRS
- Transparent Page Sharing (TPS) is disabled

Cluster Three

- Three ESXi hosts
- vSphere HA with admission control is disabled
- Proactive HA is not supported
- Transparent Page Sharing (TPS) is disabled

Virtual Machine Resource Profile 1

- Memory sharing techniques should not be used
- Virtual machines should be automatically restarted in the event of host failure if resources are available
- Automated initial virtual machine placement

Virtual Machine Resource Profile 2

- Memory sharing techniques can be used
- Virtual machines should be protected from any host hardware failures
- Automated initial virtual machine placement

Which two recommendations should the architect make for placement of the virtual machines to meet resource profile requirements? (Choose two.)

- A. All virtual machines matching Virtual Machine Resource Profile 2 should be placed on Cluster One.
- B. All virtual machines matching Virtual Machine Resource Profile 1 should be placed on Cluster One.
- C. All virtual machines matching Virtual Machine Resource Profile 2 should be placed on Cluster Two.
- D. All virtual machines matching Virtual Machine Resource Profile 1 should be placed on Cluster Two.
- E. All virtual machines matching Virtual Machine Resource Profile 2 should be placed on Cluster Three.

Answer: BD

NEW QUESTION 19

An architect is designing a VMware solution for a customer to meet the following requirements:

- The solution must use investments in existing storage array that supports both block and file storage.
- The solution must support the ability to migrate workloads between hosts within a cluster.
- The solution must support resource management priorities.
- The solution must support the ability to connect virtual machines directly to LUNs.
- The solution should use existing 32G fabric infrastructure.
- There is no budget for additional physical hardware.

Which design decision should the architect make to meet these requirements?

- A. The ESXi hosts will leverage Fibre Channel (FC).
- B. The ESXi hosts will leverage iSCSI.
- C. The ESXi hosts will leverage Fibre Channel over Ethernet (FCoE).
- D. The ESXi hosts will leverage NFS.

Answer: A

NEW QUESTION 23

During a requirements gathering workshop, the customer provides the following requirement that is pertinent to the design of a new vSphere environment:

- The Maximum Tolerable Downtime (MTD) for all Tier 1 applications is one hour. Which requirement classification is being gathered for the design documentation?

- A. Manageability
- B. Performance
- C. Availability
- D. Recoverability

Answer: C

NEW QUESTION 28

A customer provides the following list of requirements for their vSphere platform:

- REQ01 The solution should utilize dual network connections to eliminate single points of failure.
- REQ02 The solution should allow logs to be retained for a period of 30 days.
-

- REQ03 All user access to the platform should be recorded for audit purposes.
- REQ04 The solution should allow the management of multiple ESXi hosts.
- REQ05 The solution should allow users to view the remote console of virtual machines.
- Which two of the listed requirements would be classified as non-functional requirements? (Choose two.)

- A. The solution should utilize dual network connections to eliminate single points of failure
- B. The solution should allow the management of multiple ESXi hosts
- C. The solution should allow users to view the remote console of virtual machines
- D. All user access to the platform should be recorded for audit purposes
- E. The solution should allow logs to be retained for a period of 30 days

Answer: AE

NEW QUESTION 30

Following a recent acquisition, an architect needs to merge IT assets into its current data center. The combined vSphere environment will need to run the newly acquired company's virtual machines. Network integration work has already been completed and the current environment has capacity to host all virtual machines. The Operations team needs to identify which virtual machines belong to the acquired company and report on their usage. How should the architect merge the company's assets and virtual machines?

- A. Leave the newly acquired company's assets in its current place
- B. Lift and shift the acquired assets into the data center
- C. Migrate the acquired company's virtual machines into the existing vSphere environment
- D. Migrate and apply vSphere tags to the acquired company's virtual machines

Answer: D

NEW QUESTION 32

An architect is tasked with recommending a solution for a company that is running out of VLANs. Currently the company is running two separate data centers based on vSphere including an Enterprise Plus license. In the first data center, the problem was solved by using VMware NSX and overlay network. In the second data center, there is currently no VMware NSX implementation in place and no budget for additional licenses. What should the architect recommend as a potential solution to provide support for additional VLANs?

- A. Separate Distributed Virtual Switches (DVS)
- B. Private VLANs (PVLAN)
- C. Virtual Guest Tagging (VGT)
- D. vSwitch VLAN Tagging (VST)

Answer: A

NEW QUESTION 37

An architect is designing a solution based on the following information:

- Each ESXi host has a single physical NIC with two 10 Gbps ports.
- There is a performance-based service-level agreement (SLA) that guarantees 15 Gbps bandwidth for production virtual machines at all times.
- There is no budget to purchase additional hardware.
- The hardware replacement SLA is based on a delivery agreement of two business days.

Which recommendation for the configuration of vSphere High Availability (HA) should the architect include in the design?

- A. Configure vSphere HAConfigure % based admission control Configure two isolation addresses Consider an OEM with NIC failure conditions in their Proactive HA plugin
- B. Configure vSphere HASet das.IgnoreRedundantNetWarning to trueConsider an OEM with NIC failure conditions in their Proactive HA plugin
- C. Configure vSphere HAConfigure two existing data stores for heartbeatConsider an OEM with NIC failure conditions in their Proactive HA plugin
- D. Configure Proactive HA Automation Level: Automated Remediation: Maintenance mode for all failuresConsider an OEM with NIC failure conditions in their Proactive HA plugin

Answer: A

NEW QUESTION 40

Which requirement would be classified as a functional requirement within the application design documentation?

- A. The application must be hosted with redundancy levels of N+1 or better.
- B. Penetration testing must be executed quarterly with a pass rate of 80% or higher.
- C. The application must be capable of handling 200 transactions per second.
- D. Administrators must monitor the network traffic of the desired systems.

Answer: C

NEW QUESTION 45

An architect is creating a network design for a new vSphere environment.

Based on customer requirements, the environment must support the following types of traffic:

- Management
- vMotion
- vSAN
- Fault Tolerance

> Virtual machine traffic, which cannot be impacted by other types of traffic
 Which design recommendation can the architect make for a resilient infrastructure with vSphere network service tiering?

- A. Use different logical networks to ensure traffic is isolated with separate VLANs
- B. Use Network I/O Control and ensure appropriate share value is defined for different types of traffic giving priority to the virtual machines traffic
- C. Use two dedicated virtual switches with a single adapter each, dedicating one virtual switch for Management, vMotion, vSAN and Fault Tolerance traffic, and the second one for virtual machine traffic
- D. Use a NIC teaming policy based on the physical NIC load

Answer: A

NEW QUESTION 49


An architect is preparing a design for a customer. Based on requirements, the architect recommends an HCI- based infrastructure with all-flash architecture. During the assessment, it is confirmed that the network throughput generated by virtual machines does not exceed 150 Mb/s. What is the minimum number and type of network adapters in each server that the architect can recommend to ensure requirements are met and there is no single point of failure?

- A. Two 1 GbE network adapters per server
- B. Four 1 GbE network adapters per server
- C. Four 10 GbE network adapters per server
- D. Two 10 GbE network adapters per server

Answer: C

NEW QUESTION 50

Refer to the exhibit.
 During a requirements gathering workshop, the customer shares the following diagram regarding their availability service-level agreements (SLAs):

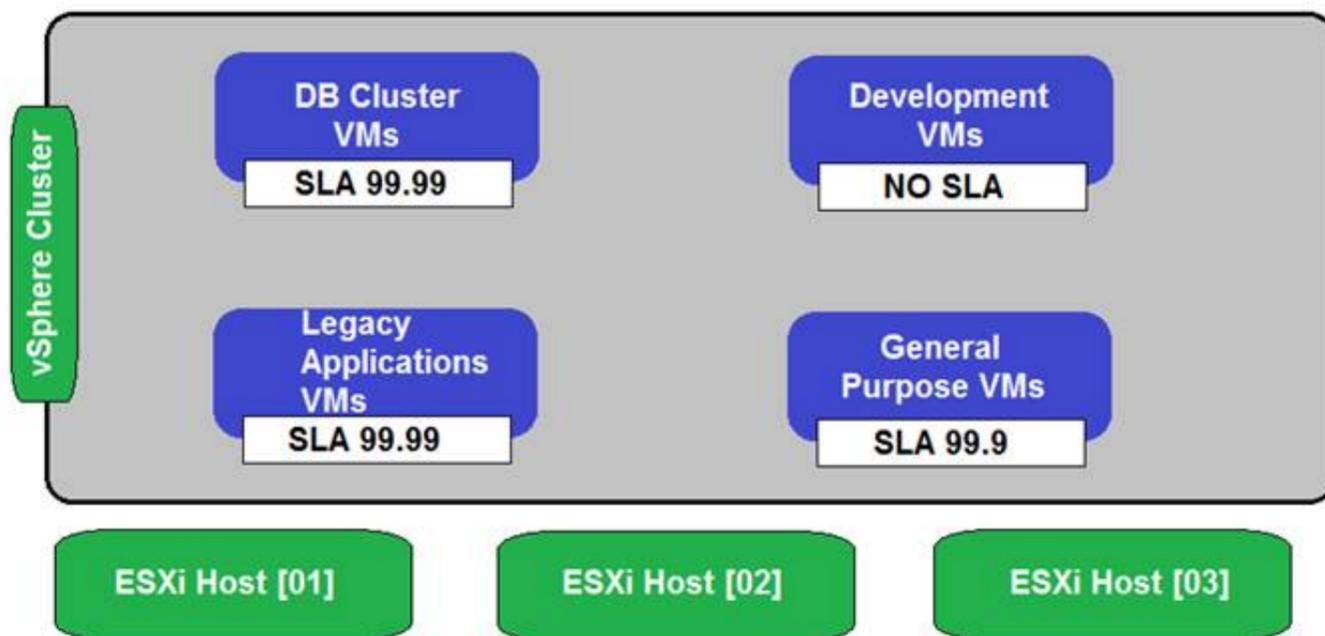

The customer wants database application level availability to always take precedence. What should the architect recommend to meet the customer's requirement?

- A. Enable vSphere HA and add a VM Override with VM Restart Priority set to Highest.
- B. Enable Fault Tolerance.
- C. Enable Sphere HA and maintain the default settings.
- D. Enable vSphere HA and add a VM Override with VM Restart Priority set to Lowest.

Answer: D

NEW QUESTION 51

An architect is designing a vSphere environment for a customer based on the following information:

- > The vSphere cluster will have three hosts only due to budget considerations.
- > A database cluster (node majority) consisting of three virtual machines will be running on the vSphere cluster.

Which two recommendations can the architect make so that the customer achieves the highest level of application availability while taking into consideration operational resiliency? (Choose two.)

- A. Create VM-VM anti-affinity rules
- B. Set das.respectvmvanti-affinityrules to false
- C. Create VM-Host anti-affinity rules
- D. Disable vSphere HA during maintenance
- E. Set das.ignoreinsufficienthbdastore to true

Answer: BC

NEW QUESTION 55

During a requirements gathering workshop to design a physical to virtual migration, the customer provides the following information:

- > There is no physical firewall in the data center with no anticipated plans for a future network refresh.
- > Leveraging the virtual infrastructure to mitigate the lack of network security must be addressed in the design.
- >

All physical servers to be migrated exist on the same VLAN.

Which recommendation should the architect make to address the customer requirement with regard to virtual networking?

- A. Split the virtual machines into several VLANs Use tag actions
- B. Create port groups with different names and same VLAN IDs Enable traffic shaping for ingress and egress traffic
- C. Enable traffic filtering and marking Use allow or drop actions
- D. Disable traffic filtering and marking Use tag actions

Answer: A

NEW QUESTION 58

Which two of the listed requirements would be classified as manageability non-functional requirements? (Choose two.)

- A. ESXi clusters must scale when compute resources are sustained above 70% for five business days
- B. vSphere Fault Tolerance must be supported to improve application uptime
- C. ESXi host updates must be installed within one week of release
- D. The vSphere environment must support administrator password rotation
- E. ESXi clusters must scale to 500 concurrent virtual machines

Answer: AC

NEW QUESTION 61

As part of a new hybrid cloud initiative for a large financial company, the customer technical team is presenting an overview of the current state of the infrastructure and their vision for a new solution.

The project team captures notes during the presentation and adds them to the discovery documentation. Which of the listed statements is a design constraint?

- A. The applications are created in-house with in-guest recovery protection
- B. The maximum tolerable data loss is 10 minutes
- C. The two data center locations have a network latency of 8 ms round-trip time (RTT)
- D. The existing storage is out of maintenance

Answer: D

NEW QUESTION 63

Which of the listed requirements would be classified as a recoverability non-functional requirement?

- A. The platform must be integrated with existing change control policies.
- B. The platform must be able to support a maximum tolerable downtime (MTD) of 30 minutes.
- C. Maintenance windows must be scheduled to take place monthly during an established overnight period.
- D. The platform must be available 24 hours a day, 7 days a week with the exception of scheduled downtime.

Answer: A

NEW QUESTION 64

An architect is designing a series of new vSphere environments for an organization. The environments will be deployed in their US-East and US-West region data centers. Each data center may have one or more dedicated vSphere environments. Only the vSphere environments within a data center will be configured with Enhanced Linked Mode. The Chief Technology Officer (CTO) has authorized the use of VMware vRealize Automation Cloud for automation. The build team creates standardized virtual machine images for various operating systems in Open Virtualization Format (OVF) and publishes the latest version on an as-needed basis to an internal HTTPS-accessible repository.

The architect must design a content library topology that meets the following requirements:

- > A localized content library must be available in each data center.
- > Each content library must be updated when an image is updated and released by the build team.
- > It must leverage the existing build team processes.

What should the architect recommend to meet the requirements?

- A. Work with the build team to create a local content library for each vSphere environment. Import the OVF images when new image are published to the repository.
- B. Create a local content library for the primary vSphere environment in each data center. Create a subscribed content library for each additional vSphere environment in each data center.
- C. Configure the content library to download content automatically.
- D. Work with the build team to automate a JSON-based manifest to the repository when changes occur in the repository. Create a subscribed content library for each vSphere environment.
- E. Configure the content library to download content when needed.
- F. Work with the build team to automate a JSON-based manifest to the repository when changes occur in the repository. Create a subscribed content library for each vSphere environment.
- G. Configure the content library to download content automatically.

Answer: B

NEW QUESTION 66

A customer requires the use of data encryption to ensure data is not accessible when a drive is removed from the primary storage platform. However, there is also a requirement to use deduplication and compression against all workloads in order to conserve space.

Which solution meets the customer requirements?


- A. Data-in-transit encryption
- B. OS-level encryption
- C. Encrypted backups

D. Array-based encryption

Answer: D

NEW QUESTION 70

Refer to the exhibit.

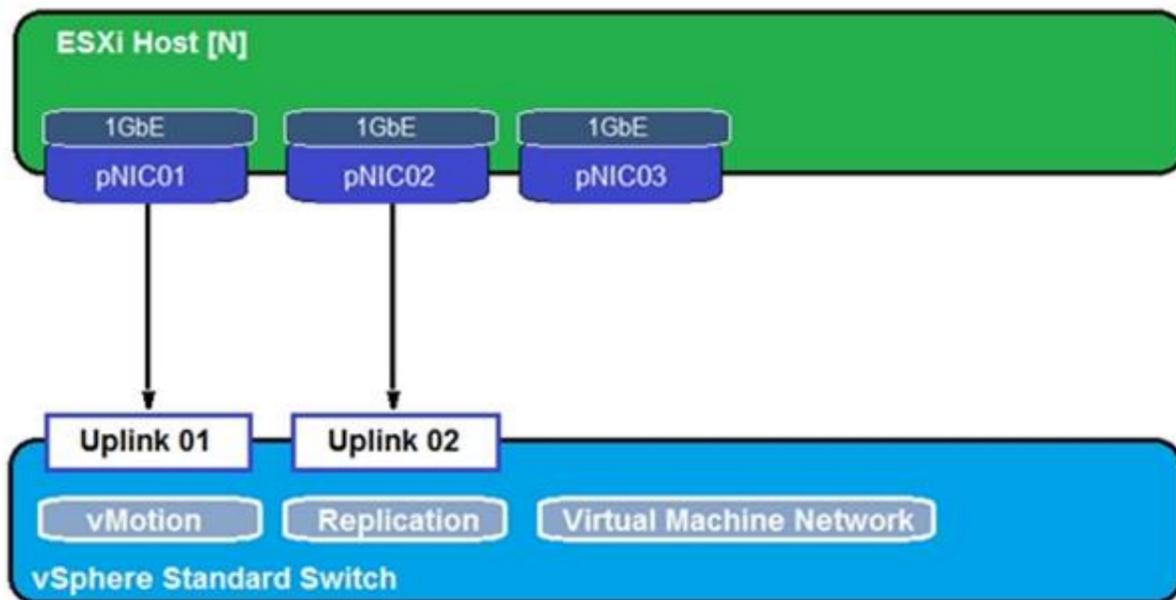

During a requirements gathering workshop, the customer shares the following about their existing ESXi host virtual networking infrastructure: The customer confirms that:

- > Each ESXi host has approximately 200 virtual machines.
- > They want to maximize the number of concurrent virtual machine migrations.
- > When placing a host in maintenance mode, it takes a long time to evacuate the virtual machines. Which two recommendations should the architect make in order to help the customer overcome their challenge? (Choose two.)

- A. Configure the network to use MTU for the VMotion VMKernel to 1,600 bytes
- B. Configure the network to use MTU for the VMotion VMKernel to 9,000 bytes
- C. Create an additional standard switch with pNIC3 to use for vMotion
- D. Use the 3 pNICs and bundle them in a link aggregation group (LAG) configuration
- E. Use 10 GbE NICs instead of 1 GbE

Answer: CE

NEW QUESTION 75

An architect is finalizing the design for a new vCenter Server High Availability deployment. What is one thing the architect must document in the design?

- A. The load balancing algorithm used by the Management Distributed Virtual Switches (DVS)
- B. The SSH configuration settings for the vCenter Server's active node
- C. The vCenter Management Network IPv4 addresses for the witness node vCenter Server
- D. The details of each of the vCenter Server licenses for active, passive and witness nodes

Answer: C

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.avail.doc/GUID-9B176C8A-4EEE-4A>

NEW QUESTION 79

An architect is tasked with designing a new VMware software-defined data center (SDDC) using VMware vSAN. The architect uses a storage assessment tool to determine the storage requirements for the new vSAN cluster. The new SDDC is going to be deployed into the existing data center and must be connected to a shared core network switch.

The architect decides to use vSAN ReadyNodes with the following configuration:

- > Two disk groups with:
- > Write Intensive NVMe 800 GB drive for cache
- > Four 3.84 TB Mixed Use NVMe for capacity
- > Four 10 GbE ports

Which element represents a risk that should be included in this design?

- A. The number of 10 GbE capable ports in the vSAN ReadyNode
- B. The use of vSAN ReadyNodes
- C. The existing network is 10 GbE capable
- D. The use of NVMe drives for cache and capacity

Answer: C

NEW QUESTION 81

A VMware Service Provider is tasked with delivering a solution for continuous availability for a subset of Tier 1 virtual machines (VMs) and vApps running in their vSAN environment. The VMs make up a

mission-critical application and there can be no data loss in the event of an outage at their primary data center. In the event of a regional outage, they have established a 10-minute recovery point objective (RPO). Failover/failback to the third site must be automated.

They have the following in place:

- Two local data centers (primary and secondary) connected with 100 Gb dedicated fiber
- 2ms round-trip time (RTT) latency between the sites A third data center located on another power grid
- 70ms latency between the primary and secondary data centers
- Matching storage arrays at all locations

Which two solutions could be used to meet the requirements? (Choose two.)

- A. Site Recovery Manager
- B. Snapshots
- C. vSAN Metro Cluster
- D. vSphere Data Protection
- E. vStorage APIs for Array Integration (VAAI)

Answer: BC

NEW QUESTION 82

An architect is planning the physical server configuration for a vSAN-based infrastructure.

Which operations mode should a RAID controller support to minimize potential server downtime during physical disk failures?

- A. RAID controller with Passthru mode
- B. RAID controller with RAID 5 mode
- C. RAID controller with RAID 10 mode
- D. RAID controller with RAID 6 mode

Answer: D

NEW QUESTION 83

As part of a requirements gathering workshop, the customer provides the following requirements for the design of a new greenfield virtual infrastructure:

- Some applications have a latency that must be less than 5 minutes.
- The solution must be able to support a workload growth rate of 10% per year. Which requirement classification is being gathered for the design documentation?

- A. Performance
- B. Manageability
- C. Recoverability
- D. Availability

Answer: A

NEW QUESTION 85

.....

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual 3V0-21.21 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the 3V0-21.21 Product From:

<https://www.2passeasy.com/dumps/3V0-21.21/>

Money Back Guarantee

3V0-21.21 Practice Exam Features:

- * 3V0-21.21 Questions and Answers Updated Frequently
- * 3V0-21.21 Practice Questions Verified by Expert Senior Certified Staff
- * 3V0-21.21 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 3V0-21.21 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year