


## 350-601 Dumps

# Implementing and Operating Cisco Data Center Core Technologies

<https://www.certleader.com/350-601-dumps.html>

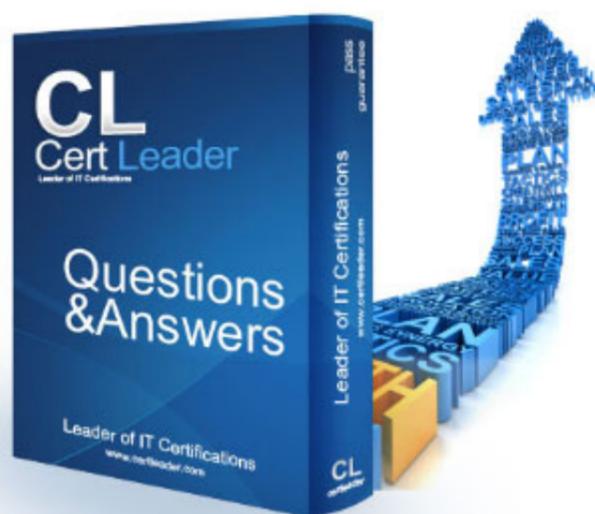

**NEW QUESTION 1**

DRAG DROP

An engineer is implementing NetFlow on a Cisco Nexus 7000 Series Switch.

Drag and drop the NetFlow commands from the left into the correct order they must be entered on the right.

Select and Place:

N7K-1(config)# interface <interface> N7K-1(config-if)# ip flow monitor NetflowMonitor input	Step 1
N7K-1(config)# feature netflow	Step 2
N7K-1(config)# flow exporter NetflowMonitor N7K-1(config)# flow record NetflowMonitor	Step 3
N7K-1(config)# flow monitor NetflowMonitor	Step 4

- A. Mastered
- B. Not Mastered

**Answer:** A

**Explanation:**

N7K-1(config)# interface <interface> N7K-1(config-if)# ip flow monitor NetflowMonitor input	N7K-1(config)# feature netflow
N7K-1(config)# feature netflow	N7K-1(config)# flow exporter NetflowMonitor N7K-1(config)# flow record NetflowMonitor
N7K-1(config)# flow exporter NetflowMonitor N7K-1(config)# flow record NetflowMonitor	N7K-1(config)# flow monitor NetflowMonitor
N7K-1(config)# flow monitor NetflowMonitor	N7K-1(config)# interface <interface> N7K-1(config-if)# ip flow monitor NetflowMonitor input

**NEW QUESTION 2**

The engineer must configure SPAN on a Cisco Nexus 5000 Series Switch to get a capture of the traffic from these applications for an in-depth packet analysis. Which two SPAN characteristics must be considered? (Choose two.)

- A. SPAN source ports can be monitored in multiple SPAN sessions.
- B. The Ethernet, FC, vFC, port channel, SAN port channel can be used as SPAN source ports.
- C. A SPAN source port cannot be a destination SPAN port.
- D. Only Ethernet, FC, vFC, port channel port types can be used as SPAN source ports.
- E. The rx/tx option is available for VLAN or VSAN SPAN sessions.

**Answer:** BC

**NEW QUESTION 3**

Refer to the exhibit.

```
restart pim
```

Which result of running the command is true?

- A. Multicast traffic forwarding is suspended.
- B. MRIB is flushed.
- C. The PIM database is deleted.
- D. PIM join messages are suspended.

**Answer:** C

**NEW QUESTION 4**

Refer to the exhibit.

```
Nexus(config)# show checkpoint summary
User Checkpoint Summary
-----
1) BeforeL3:
Created by admin
Created at Mon, 15:25:08 31 Dec 2018
Size is 9,345 bytes
Description: None

System Checkpoint Summary
-----
2) system-fm-vrrp:
Created by admin
Created at Fri, 09:57:02 14 Jun 2019
Size is 20,865 bytes
Description: Created by Feature Manager.

3) system-fm-hsrp_engine:
Created by admin
Created at Fri, 09:57:28 14 Jun 2019
Size is 20,852 bytes
Description: Created by Feature Manager.
```

What is the reason the system-fm-vrrp checkpoint was created?

- A. The VRRP process crashed and the checkpoint was automatically created.
- B. The VRRP service restarted and the checkpoint was automatically created.
- C. The network administrator manually created it.
- D. The VRRP-enabled feature has been disabled.

**Answer: D**

**NEW QUESTION 5**

What is an advantage of streaming telemetry over SNMP?

- A. on-change traps sent to a receiver
- B. periodic push-based subscription messages
- C. periodic polling of the device status
- D. MD5-based authentication on polling

**Answer: B**

**NEW QUESTION 6**

APIC EPG Resolution Immediacy is set to "Immediate".

Which statement is true about the Deployment Immediacy for VMM domains associated to EPGs?

- A. If "On demand" is selected, the policy is programmed in the hardware only when the first packet is received through the data path.
- B. If "Immediate" is selected, the policy is programmed in the hardware as soon as the leaf is booted.
- C. The "Immediate" and "On demand" options require a port group to be created on the VDS.
- D. If "On demand" is selected, the policy is programmed in the hardware only when the APIC detects a VM created in the EPG.

**Answer: A**

**NEW QUESTION 7**

An engineer is implementing an import operation in Cisco UCS Manager.

What is the impact of performing this operation?

- A. Information can be modified on the management plane only.
- B. A configuration can be imported from a higher release to a lower release.
- C. An import operation can be scheduled.
- D. Only a configuration file that was exported from the same Cisco UCS Manager can be imported.

**Answer: A**

**NEW QUESTION 8**

An engineer is duplicating an existing Cisco UCS setup at a new site.

What are two characteristics of a logical configuration backup of a Cisco UCS Manager database? (Choose two.)

- A. contains the configured organizations and locales
- B. contains the VLAN and VSAN configurations
- C. contains the AAA and RBAC configurations
- D. contains all of the configurations
- E. contains a file with an extension tgz that stores all of the configurations

**Answer: BC**

**NEW QUESTION 9**

Which two settings must be configured before enabling a Cisco UCS Manager domain for Cisco Intersight connectivity? (Choose two.)

- A. SMTP servers
- B. SMTP reply-to address
- C. NTP servers
- D. syslog redirection

E. DNS servers

**Answer:** CE

**NEW QUESTION 10**

When the default firmware package is set to a new version, which type of policy determines the liming of server reboots during the firmware upgrade?

- A. diagnostics
- B. maintenance
- C. local disk
- D. BIOS

**Answer:** B

**NEW QUESTION 10**

DRAG DROP

An engineer deploys a custom guest shell rootfs onto multiple switches. Drag and drop the steps from the left into the correct order on the right. Export the Guest Shell rootfs.

Select and Place:

Customize the guest shell rootfs.	Step 1
Export the Guest Shell rootfs.	Step 2
Store it in a file server.	Step 3
Import the Guest Shell rootfs to other switches.	Step 4
Install the specific Guest Shell across devices simultaneously.	Step 5

- A. Mastered
- B. Not Mastered

**Answer:** A

**Explanation:**

Customize the guest shell rootfs.	Customize the guest shell rootfs.
Export the Guest Shell rootfs.	Export the Guest Shell rootfs.
Store it in a file server.	Store it in a file server.
Import the Guest Shell rootfs to other switches.	Import the Guest Shell rootfs to other switches.
Install the specific Guest Shell across devices simultaneously.	Install the specific Guest Shell across devices simultaneously.

**NEW QUESTION 13**

Which two statements about the process of performing an EPLD upgrade on a Cisco MDS 9000 Series Switch are true? (Choose two.)

- A. The upgrade can be performed from the standby supervisor module.
- B. The upgrade process disrupts only the module that is being upgraded.
- C. The active supervisor can be upgraded.
- D. If an upgrade is interrupted, the upgrade continues after a connection is restored.
- E. Modules must be online to be upgraded.

**Answer:** AB

**NEW QUESTION 14**

Which two statements about the process at upgrading an EPLD on a Cisco MDS 9000 Series Switch are correct? (Choose two.)

- A. EPLDs can be upgraded only to the latest EPLD image.
- B. EPLD upgrades can be completed without powering down the module during the upgrade.
- C. An upgrade verification identifies the impact of each EPLD upgrade.
- D. The EPLDs for all the modules on a switch must be upgraded at the same time.

E. EPLDs can be upgraded without replacing the hardware.

**Answer:** CE

**NEW QUESTION 19**

DRAG DROP

An engineer is configuring VNTag between a virtualized server and a Cisco Nexus 5500 Series switch. Drag and drop the configuration steps from the left into the correct order on the right.

Select and Place:

Configure support for VNTag mode on the interface that connects to the server.	Step 1
Configure the vNICs of the server.	Step 2
Configure the server to support NIV mode.	Step 3
Enable the virtualization feature set.	Step 4
Configure the port profile.	Step 5
Install the virtualization feature set.	Step 6

- A. Mastered
- B. Not Mastered

**Answer:** A

**Explanation:**

Configure support for VNTag mode on the interface that connects to the server.	Install the virtualization feature set.
Configure the vNICs of the server.	Enable the virtualization feature set.
Configure the server to support NIV mode.	Configure the port profile.
Enable the virtualization feature set.	Configure support for VNTag mode on the interface that connects to the server.
Configure the port profile.	Configure the vNICs of the server.
Install the virtualization feature set.	Configure the server to support NIV mode.

**NEW QUESTION 23**

An engineer must implement a Cisco UCS system at a customer site. One of the requirements is to implement SAN boot. The storage system maps the source WWPN to a unique LUN. Which method does Cisco recommend to configure the SAN boot?

- A. Define the vHBAs as bootable and leave the boot target definition empty.
- B. Create a SAN boot policy in which every initiator is mapped to a different target LUN.
- C. Define the vHBAs as bootable and leave the default values on the boot target definition.
- D. Create a SAN boot policy in which every initiator is mapped to the same target LUN.

**Answer:** D

**NEW QUESTION 27**

In an FCoE environment, for which two sets of data must an interface that implements the PAUSE mechanism always provision sufficient ingress buffer? (Choose two.)

- A. frames that were sent with high credit
- B. frames that were sent on the link but not yet received
- C. frames that were processed and transmitted by the transmitter after the PAUSE frame left the sender
- D. frames that were processed and transmitted by the transmitter before the PAUSE frame left the sender
- E. frames that were sent on the link and received

**Answer:** BD

**NEW QUESTION 31**

DRAG DROP

Drag and drop the characteristics from the left onto the correct storage systems on the right.  
Select and Place:

expensive and complex to manage	NAS
moderately expensive and simple to configure	
most resilient, highly scalable, and high-performance storage	
appliance providing file system access	SAN
lacks scalability, performance, and advanced features	

- A. Mastered
- B. Not Mastered

**Answer:** A

**Explanation:**

expensive and complex to manage	NAS
moderately expensive and simple to configure	
most resilient, highly scalable, and high-performance storage	
appliance providing file system access	SAN
lacks scalability, performance, and advanced features	

**NEW QUESTION 35**

An engineer is implementing FCoE.  
Which aspect of DCBXP on a Cisco Nexus switch affects this implementation?

- A. It requires that LLDP transmit and LLDP receive are enabled on the FCoE interface.
- B. It uses the Cisco Fabric Services protocol to exchange parameters between two peer links.
- C. It provides the authentication of peers on the Cisco Nexus switch.
- D. It always is enabled on 10/100-Mbps native Ethernet ports.

**Answer:** A

**NEW QUESTION 40**

Which product includes prebuilt templates that can be used to customize fabric deployments?

- A. Cisco Tetration
- B. Cisco Data Center Network Manager
- C. Cisco ACI
- D. Cisco UCS Manager

**Answer:** B

**NEW QUESTION 44**

Which statement about monitoring Fibre Channel traffic on a Cisco UCS 6332 Fabric Interconnect is true?

- A. Fibre Channel traffic can be monitored only on one vHBA per server.
- B. Fibre Channel traffic can be monitored as it is encapsulated as FCoE.
- C. The monitoring of Fibre Channel traffic is limited to the default VSAN.
- D. The destination port for monitoring must be an unassigned Fibre Channel port.

**Answer:** A

**NEW QUESTION 48**

An engineer is implementing NPV mode on a Cisco MDS 9000 Series Switch. Which action must be taken?

- A. NPIV must be enabled on the upstream switch.
- B. The FCNS database must be disabled in the fabric.
- C. A port channel must be configured to the upstream switch.
- D. All switches in the fabric must be Cisco MDS switches.

**Answer:** A

**NEW QUESTION 51**

An engineer must ensure fabric redundancy when implementing NPV mode on a Cisco MDS 9000 Series Switch. Which action enables fabric redundancy?

- A. Use TE ports to connect to upstream switches.
- B. Add a port channel to upstream switches.
- C. Configure the NPV devices to use an external FLOGI database.
- D. Connect the NPV devices to multiple upstream switches.

**Answer:** B

**NEW QUESTION 53**

DRAG DROP

An engineer must recover configuration on a Cisco MDS 9000 Series switch from a previous version that was backed up to bootflash and then verify the restoration. Drag and drop the commands on the left to the correct order on the right.

Select and Place:

copy bootflash:<conrfiguration_file> runring-config	Step 1
copy running-config startup-config	Step 2
show startup-config	Step 3
write erase	Step 4
reload	Step 5

- A. Mastered
- B. Not Mastered

**Answer:** A

**Explanation:**

copy bootflash:<conrfiguration_file> runring-config	write erase
copy running-config startup-config	reload
show startup-config	copy bootflash:<conrfiguration_file> runring-config
write erase	copy running-config startup-config
reload	show startup-config

**NEW QUESTION 58**

Refer to the exhibit.

```

Python Code:

import requests
import json

url='http://lab-93180bdlf-sw1/ins'
switchuser='dazfre'
switchpassword='Clscorox0'

myheaders={'content-type': 'application/json'}
payload={
  "ins_api": {
    "version": "1.0",
    "type": "cli_show",
    "chunk": "0",
    "sid": "1",
    "input": "configure terminal : feature hsrp",
    "output_format": "json"
  }
}
response = requests.post(url,data=json.dumps(payload),
headers=myheaders,auth=(switchuser,switchpassword))

print(response.text)

ERROR MESSAGE
{
  "ins_api" : {
    "type": "cli_show",
    "version": "1.0",
    "sid": "eoc",
    "outputs": [
      "output" : [
        {
          "clierror": "% invalid command\n",
          "input": "configure terminal",
          "msg": "input CLI command error",
          "code": "400"
        },
        {
          "clierror": "% invalid command\n",
          "input": "feature hsrp",
          "msg": "input CLI command error",
          "code": "400"
        }
      ]
    ]
  }
}

```

Why does the Python code for Cisco NX-API print an error message?

- A. The JSON is not a supported format for the NX-API.
- B. The "type" is wrong in the header of the request and should be "cli\_conf"
- C. NX-API does not allow configuration for features via the requests module.
- D. The "type" is wrong in the body of the request and should be "cli\_conf"

**Answer: C**

**NEW QUESTION 63**

An engineer enters these commands while in EEM on a Cisco Nexus 9000 Series Switch event manager applet Backup-config event timer watchdog time 1800 name timer event cli match "copy running-config startup-config" What is the result of applying this configuration?

- A. It generates an error because no action is mentioned.
- B. It executes the copy running-config startup-coring command.
- C. It saves the running configuration every 1800 seconds.
- D. It blocks the copy running-config startup-config command.

**Answer: A**

**NEW QUESTION 65**

Which configuration generates a syslog message when CPU utilization is higher than 60%?

- A. event manager applet HIGH-CPU event snmp oid 1.3.6.1.4.1.9.9.109.1.1.1.1.6.1 get-type exact entry-op gt 60 poll-interval 5 action 1.0 syslog priority notifications msg "cpu high"
- B. event manager applet HIGH-CPU event snmp oid 1.3.6.1.4.1.9.9.109.1.1.1.1.6.1 get-type exact entry-op lt 60 poll-interval 5 action 1.0 syslog priority notifications msg "cpu high"
- C. event manager applet HIGH-CPU event snmp oid 1.3.6.1.4.1.9.9.109.1.1.1.1.6.1 get-type next entry-op gt 60 poll-interval 5 action 1.0 syslog priority notifications msg "cpu high"
- D. event manager applet HIGH-CPU event snmp oid 1.3.6.1.4.1.9.9.109.1.1.1.1.6.1 get-type next entry-op lt 60 poll-interval 5 action 1.0 syslog priority notifications msg "cpu high"

**Answer: A**

**NEW QUESTION 70**

An engineer is enabling port security on a Cisco MDS 9000 Series Switch. Which feature of enabling port security on a Cisco MDS 9000 Series Switch must be considered?

- A. It can be distributed by using Cisco Fabric Services.
- B. It authorizes only the configured sWWN to participate in the fabric.
- C. It always learns about switches that are logging in.
- D. It binds the fabric at the switch level.

**Answer: A**

**NEW QUESTION 75**

DRAG DROP

An engineer is implementing security on the Cisco MDS 9000 switch.

Drag and drop the descriptions from the left onto the correct security features on the right.

Select and Place:

can be distributed via fabric services	<b>Fabric Binding</b>	Target 1
uses the Exchange Fabric Membership Data protocol		Target 2
allows a preconfigured set of Fibre Channel devices to logically connect to SAN ports	<b>Port Security</b>	Target 3
prevent unauthorized switches from joining the fabric or disrupting current fabric operations		Target 4

- A. Mastered
- B. Not Mastered

**Answer:** A

**Explanation:**

can be distributed via fabric services	<b>Fabric Binding</b>	uses the Exchange Fabric Membership Data protocol
uses the Exchange Fabric Membership Data protocol		allows a preconfigured set of Fibre Channel devices to logically connect to SAN ports
allows a preconfigured set of Fibre Channel devices to logically connect to SAN ports		
prevent unauthorized switches from joining the fabric or disrupting current fabric operations	<b>Port Security</b>	can be distributed via fabric services
		prevent unauthorized switches from joining the fabric or disrupting current fabric operations

**NEW QUESTION 77**

What is a feature of NFS?

- A. zone-based access control
- B. Kerberos-based security model
- C. block-based file access
- D. role-based access control

**Answer:** B

**NEW QUESTION 79**

Port security is enabled on a Cisco MDS 9000 Series Switch.

Which statement is true?

- A. Port security can be enabled only globally and affects all VSANs.
- B. Any devices currently logged in must be added manually to the device database.
- C. Auto-learning is always enabled automatically when port security is enabled.
- D. Cisco Fabric Services must be disabled before enabling port security.

**Answer:** C

**NEW QUESTION 81**

When a strict CoPP policy is implemented, which statement describes an event during which packets are dropped?

- A. A large system image is copied to a switch by using the default VRF.
- B. Fifteen SSH sessions remain connected to the switch.
- C. A ping sweep is performed on a network that is connected through a switch.
- D. A web server that is connected to a switch is affected by a DDoS attack.

**Answer:** D

**NEW QUESTION 86**

A host in EPG Client wants to talk to a webserver in EPG Web. A contract with default settings is defined between EPG Client and EPG Web, which allows TCP communication initiated by the client toward the webserver with TCP destination port 80. Which statement is true?

- A. If EPG Web is made a preferred group member, a contract between EPG Client and EPG Web is no longer required for the host in EPG Client to reach the webserver in EPG Web.
- B. If vzAny is configured to consume and provide a "deny all" contract, traffic between EPG Client and EPG Web is no longer allowed.
- C. The host in EPG Client can connect to TCP destination port 80 on the webserver in EPG We
- D. The webserver will not be able to initiate a separate TCP connection to a host port with TCP source port 80.
- E. The host in EPG Client can connect to TCP destination port 80 on the webserver in EPG We
- F. The webserver can initiate a separate TCP connection to a host port with TCP source port 80.

**Answer: D**

**NEW QUESTION 87**

Which two authentication types does Cisco UCS Manager support when configuring authentication? (Choose two.)

- A. PAM
- B. local
- C. 802.1X
- D. Kerberos
- E. LDAP

**Answer: BE**

**NEW QUESTION 90**

.....

## Thank You for Trying Our Product

\* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

\* One year free update

You can enjoy free update one year. 24x7 online support.

\* Trusted by Millions

We currently serve more than 30,000,000 customers.

\* Shop Securely

All transactions are protected by VeriSign!

**100% Pass Your 350-601 Exam with Our Prep Materials Via below:**

<https://www.certleader.com/350-601-dumps.html>