

## Exam Questions 300-810

Implementing Cisco Collaboration Applications (CLICA)

<https://www.2passeasy.com/dumps/300-810/>



#### NEW QUESTION 1

Which authentication method allows a user to log in to an SSO-enabled Cisco Unified Communications application by utilizing a Microsoft Windows login, thereby not requiring any credentials to be entered?

- A. Smart Card
- B. OAuth
- C. form-based
- D. Kerberos

**Answer:** B

#### Explanation:

Reference: <https://developer.cisco.com/docs/cisco-unified-communications-single-sign-on-tutorial/#!cisco-unified-communications-single-sign-on-tutorial/learning-more-about-ssso>

#### NEW QUESTION 2

Which entity is a standard component used for authentication by SAML 2.0?

- A. identity provider
- B. session broker
- C. Internet service provider
- D. client access server

**Answer:** A

#### NEW QUESTION 3

An engineer must configure a test user mailbox in a newly deployed Cisco Unity Express module. Which console command set reflects the correct configuration in this scenario?

- A. 

```
username testuser create
username testuser pin 12345
username testuser phonenumber 4001
voicemail mailbox owner testuser
```
- B. 

```
username testuser pin 12345
username testuser phonenumber 4001
voicemail mailbox owner testuser
```
- C. 

```
username testuser phonenumber 4001
username testuser pin 12345
voicemail mailbox owner testuser
```
- D. 

```
username testuser create
username testuser pin 12345
username testuser phonenumber 4001 testuser@labdomain.com
voicemail mailbox create testuser
```

**Answer:** A

#### NEW QUESTION 4

Which two command line arguments can you specify when installing Cisco Jabber for windows? (Choose two.)

- A. CISCO\_UDS\_DOMAIN
- B. TFTP\_ADDRESS
- C. VOICEMAIL\_SERVER\_ADDRESS
- D. SERVICES\_DOMAIN
- E. TFTP

**Answer:** DE

#### Explanation:

Reference: [https://www.cisco.com/c/en/us/td/docs/voice\\_ip\\_comm/jabber/11\\_0/CJAB\\_BK\\_D657A25F\\_00\\_deployment-installation-guide-jabber-110/CJAB\\_BK\\_D657A25F\\_00\\_deployment-installation-guide-jabber-110\\_chapter\\_01100.html#JABW\\_RF\\_CE43EF4C\\_00](https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/jabber/11_0/CJAB_BK_D657A25F_00_deployment-installation-guide-jabber-110/CJAB_BK_D657A25F_00_deployment-installation-guide-jabber-110_chapter_01100.html#JABW_RF_CE43EF4C_00)

#### NEW QUESTION 5

Which description of an IdP server is true?

- A. authenticates user credentials
- B. provides user authorization
- C. is an authentication request that is generated by a Cisco Unified Communications application
- D. consists of pieces of security information that are transferred to the service provider for user authentication

**Answer:** D

#### Explanation:

Reference: [https://www.cisco.com/c/en/us/td/docs/voice\\_ip\\_comm/cust\\_contact/contact\\_center/crs/express\\_12\\_5/features/guide/uccx\\_b\\_125features-guide/uccx\\_b\\_125features-guide\\_chapter\\_01.html](https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cust_contact/contact_center/crs/express_12_5/features/guide/uccx_b_125features-guide/uccx_b_125features-guide_chapter_01.html)

#### NEW QUESTION 6

Refer to the exhibit.

The screenshot shows two configuration sections in Cisco Unified Communications Manager:

- Voice Mail Port Information:**
  - Voice Mail Pilot Number: 4000 (text field)
  - Calling Search Space: < None > (dropdown menu)
  - Description: Default (text field)
  - ☒ Make this the default Voice Mail Pilot for the system
- Hunt Pilot Configuration:**
  - Status:** Status: Ready (with info icon)
  - Pattern Definition:**
    - Hunt Pilot\*: 4000 (text field)
    - Route Partition: INTERNAL\_PT (text field)
    - Description: Hunt pilot for CUC (text field)
  - Call Forward and Call Pickup Settings:**
    - Calling Search Space Activation Policy: Use System Default (dropdown menu)
    - Forward All: ☒ or 4000 (text field)
    - Destination: < None > (dropdown menu)

Cisco Unity Connection and Cisco Unified Communications Manager are integrated by using SCCP. The Voice Mail Ports are registered. Users report that calls fail when forwarded to voicemail. Which is a cause of the issue?

- A. The call forward and call pickup settings do not have a CSS on Forward All.
- B. The Voice Mail Port partition on the CSS of the phone is missing.
- C. The Voice Mail Pilot is not configured with a CSS that contains the INTERNAL\_PT.
- D. The CSS on the Voice Mail Pilot is missing partitions for user phones.

**Answer:** D

#### NEW QUESTION 7

Which Cisco IM and Presence service must be activated and running for IM Presence to successfully integrate with Cisco Unified Communications Manager?

- A. Cisco DHCP Monitor Service
- B. Cisco AXL Web Service
- C. Self-Provisioning IVR
- D. Cisco XCP Authentication Service

**Answer:** A

#### NEW QUESTION 8

Refer to the exhibit.

```
Response:
HTTP/1.1 400 Bad Request
Strict-Transport-Security: max-age=31536000
X-Frame-Options: DENY
X-Content-Type-Options: nosniff
Set-Cookie: JSESSIONID=1233ADC137E591GE144792F38123AB09; Patch=/idb/; Secure; HttpOnly
TrackingID: FOS_d0ac0d7b-f4e4-4d83-ba27-d4252e310b88
Cache-Control: no-store
Date: Mon, 06 Jan 2018 10:30:00 GMT
Accept-Ranges: bytes
Server:
Vary: Accept-Charset, Accept-Encoding, Accept-Language, Accept
Access-Control-Allow-Credentials: true
Access-Control-Allow-Headers: Accept, Authorization, Content-Type, TrackingID
Access-Control-Allow-Methods: POST, PUT, PATCH, HEAD, GET, TRACE, CONNECT, OPTIONS, DELETE
Pragma: no-cache
Content-Type: application/json; charset=UTF-8
Connection: close
Content-Length: 176

{"error_description": "The refresh token provided is expired, revoked, malformed, or invalid.", "error": "invalid_request", "trackingID": "FOS_a12b123c-d123-e123-a127-b420be310188"}
```

Apple Push Notification integration is configured in a Cisco Unified IM and Presence deployment and has been working properly. Administrators now report the error “Push notification settings cannot be configured. 400 Bad Request.” in the GUI, and HTTP logs are displaying the errors that are shown in the exhibit. Which action solves this issue?

- A. Fix the network connectivity to Apple iCloud.
- B. Reboot the IM&P cluster.
- C. Change the HTTP proxy settings to remove errors in request syntax.
- D. Update Refresh Token Manually.

**Answer:** D

**Explanation:**

Reference: [https://www.cisco.com/c/en/us/td/docs/voice\\_ip\\_comm/cucm/push\\_notifications/cucm\\_b\\_push-notifications-deployment-guide.pdf](https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cucm/push_notifications/cucm_b_push-notifications-deployment-guide.pdf)

**NEW QUESTION 9**

What is the maximum number of Cisco Unity Connection locations connected in a HTTPS network?

- A. 50
- B. 25
- C. 200
- D. 10

**Answer:** B

**Explanation:**

Reference: [https://www.cisco.com/c/en/us/td/docs/voice\\_ip\\_comm/connection/10x/https\\_networking/guide/10xcuchttpsnetx/10xcuchttpsnet010.html](https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/connection/10x/https_networking/guide/10xcuchttpsnetx/10xcuchttpsnet010.html)

**NEW QUESTION 10**

What is the primary mechanism in Cisco Unity Connection that is used for toll fraud prevention?

- A. restriction tables
- B. fraud tables
- C. transfer rules
- D. calling search spaces

**Answer:** A

**Explanation:**

Reference: [https://www.cisco.com/c/en/us/td/docs/voice\\_ip\\_comm/connection/10x/security/guide/10xcucsecx/10xcucsec020.pdf](https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/connection/10x/security/guide/10xcucsecx/10xcucsec020.pdf)

**NEW QUESTION 10**

Which Cisco Unified Communications Manager service is required for users to control their desk phones using Cisco Jabber?

- A. Cisco CTIManager
- B. Cisco CTL Provider
- C. Cisco Presence Engine
- D. Cisco Serviceability Reporter

**Answer:** A

**Explanation:**

Reference: [https://www.cisco.com/c/en/us/td/docs/voice\\_ip\\_comm/jabber/11\\_5/CJAB\\_BK\\_D00D8CBD\\_00\\_deployment-installation-guide-cisco-jabber115/CJAB\\_BK\\_D00D8CBD\\_00\\_deployment-installation-guide-ciscojabber115\\_chapter\\_0111.html](https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/jabber/11_5/CJAB_BK_D00D8CBD_00_deployment-installation-guide-cisco-jabber115/CJAB_BK_D00D8CBD_00_deployment-installation-guide-ciscojabber115_chapter_0111.html)

**NEW QUESTION 14**

Refer to the exhibit.

```
[csf.cert.] [csf::cert::BaseCertVerifier:doVerifyCertificate] - About to verify the certificate.
[csf.cert.win32] [csf::cert::Win32CertVerifier:loadCertificateChain] - Certificate Chain status 0x20
[csf.cert.win32] [csf::cert::Win32CertVerifier:verifySslPolicy] - Ignoring errors due to Invalid CN
[csf.cert.win32] [csf::cert::Win32CertVerifier:verifyPolicies] - SSL Policy status 0x2148204809
[csf.cert.win32] [csf::cert::Win32CertVerifier:verifyPolicies] - Basic Constraints Policy status 0x0
[csf.cert.win32] [csf::cert::Win32CertVerifier:verifyCertificate] - Certificate validation response is 'invalid'
[csf.cert.] [csf::cert::BaseCertVerifier:doVerifyCertificate] - Result of platform cert verification: [UNTRUSTED_ROOT]
[csf.cert.] [csf::cert::BaseCertVerifier:checkIdentity] - About to check for an Identity Match.
[csf.cert.xmpp] [csf::cert::XmppCertVerifier:checkIdentifier] - Verifying XMPP Identity 'example.com'
[csf.cert.utils] [csf::cert::AltNameParserImpl:verifyXmpp] - Xmp match was not found for: 'example.com'
[csf.cert.utils] [csf::cert::AltNameParserImpl:verify] - Match for 'example.com' found in dnsNames index: 1
[csf.cert.] [csf::cert::BaseCertVerifier::checkIdentifiers] - Verification of identity succeeded. Matched identifier : 'example.com'
[csf.diagnostics] [CSFDiagnostics::DiagnosticsImpl::AddRecord] - Add record task enqueued: example.com
[csf.common.PolicySet] [csf::common:PolicySet::getPolicy] - Successfully found Policy with nature IGNORE_INVALID_CERT_CONDITION
[csf.cert.] [csf::cert::BaseCertVerifier::applyIgnoreInvalidCertConditionPolicy] - About to enforce ignore invalid cert condition policy.
[csf.cert] [csf::cert::IgnoreInvalidCertConditionPolicy::removeIgnoredStatuses] - No statuses have been removed from the verification status.
[csf.cert] [csf::cert::IgnoreInvalidCertConditionPolicy::enforce] - Policy enforced
[csf.cert.] [csf::cert::BaseCertVerifier::verifyCertificateAsync] - Certificate initially verified, result: FAILURE
[csf.cert] [csf::cert::CertificateDataImpl::parseSubjectCNField] - size of Subject CN field : 16
[csf.cert] [csf::cert::CertificateDataImpl::parseSubjectCNField] - Subject CN field : impa.example.com
[csf.common.PolicySet] [csf::common:PolicySet::getPolicy] - Successfully found Policy with nature INVALID_CERT_MANAGEMENT [PROMPT_USER]
```

Users report that they are prompted to accept server certificates when they initially run Cisco Jabber. An engineer removes these prompts to prevent confusion. Which statement about this scenario is true?

- A. Presentation of the certificates can be disabled by setting up Cisco IM&P servers into nonsecure mode.
- B. Nothing can be done to resolve this issue because certificates must be accepted by each Jabber user, per Cisco policy.
- C. These certificates are self-signed certificates, so they must be added manually to the user OS certificate stores.
- D. The behavior is a security breach because certificates are considered untrusted and as not coming from Cisco Collaboration servers.

**Answer: C**

**Explanation:**

Reference: <https://www.cisco.com/c/en/us/support/docs/unified-communications/jabber-windows/116637-trouble-jabber-00.html>

#### NEW QUESTION 19

In the integration of Cisco Unity Connection using SIP, which SIP trunk security profile option is required for MWI to work correctly?

- A. Accept out-of-dialog refer
- B. Accept replaces header
- C. Accept unsolicited notification
- D. Accept presence subscription

**Answer: A**

#### NEW QUESTION 20

Which SIP request type is used by Cisco Unity Connection to inform Cisco Unified Communications manager that the Message Waiting Indicator must be turned on or off for a specific line?

- A. NOTIFY
- B. UPDATE
- C. SUBSCRIBE
- D. PUBLISH

**Answer: A**

#### NEW QUESTION 25

Which Cisco Unified Communications Manager menu path is used to configure Cisco IM and Presence Server High Availability?

- A. System > LDAP > LDAP Directory
- B. System > Geolocation Configuration
- C. System > Presence Redundancy Groups
- D. System > Server

**Answer: C**

**Explanation:**

Reference: <https://www.cisco.com/c/en/us/support/docs/unified-communications/unified-communications-manager-im-presence-service/200958-IM-and-Presence-Server-High-Availability.html#anc4>

#### NEW QUESTION 28

DRAG DROP

Drag and drop the events for an on-premises Jabber SAML SSO flow from the left into the correct order on the right.



- A. Mastered
- B. Not Mastered

Answer: A

Explanation:



NEW QUESTION 31

When trying to send a call out of Cisco Unity Connection, what happens when enabling the transfer to an alternate contact number, located under caller input?

- A. The restriction table is checked when an administrator changes the extension number via the Cisco Unity Connection admin page.
- B. The restriction table is not checked when an administrator changes the extension number via the Cisco Unity Connection admin page.
- C. The restriction table is not checked when a user changes the extension number via a TUI conversation.
- D. The restriction table is not checked when a user changes extension number via the Cisco Unity Connection Cisco PCA page.

Answer: B

Explanation:

Reference: <https://www.cisco.com/c/en/us/support/docs/unified-communications/unity-connection/117559-probsol-transferfailure-00.html>

NEW QUESTION 36

Which two child elements can be in an XMPP message stanza? (Choose two.)

- A. <server/>
- B. <error/>
- C. <client/>
- D. <body/>
- E. <subject/>

Answer: DE

NEW QUESTION 41

Users report issues while logging in to their voicemail using the Voicemail tab in their Cisco Jabber clients. The issue occurs after users provide valid Cisco Unified Communications credentials, but they receive a failure message. What is the cause of this issue?

- A. A proper service profile is not configured on Cisco Unified Communications Manager.
- B. The voicemail users are not configured in the Cisco Unity Connection server.
- C. The web application voicemail password is set “User Must Change at Next Sign-in”.
- D. The voicemail password is not set for all users.

Answer: A

NEW QUESTION 44

Secure XMPP communication is required for XMPP federation with external domains and the Cisco IM and Presence. Which certificate is used for XMPP interdomain federation when connecting to an externally federated domain?

- A. cup
- B. cup-xmpp
- C. cup-xmpp-s2s
- D. Tomcat


**Answer:** C

**Explanation:**

Reference: [https://www.cisco.com/c/dam/en/us/td/docs/telepresence/infrastructure/vcs/config\\_guide/X8-2/XMPP-Federation-with-Cisco-VCS-and-IM-and-Presence-Service.pdf](https://www.cisco.com/c/dam/en/us/td/docs/telepresence/infrastructure/vcs/config_guide/X8-2/XMPP-Federation-with-Cisco-VCS-and-IM-and-Presence-Service.pdf)

**NEW QUESTION 45**

Refer to the exhibit.

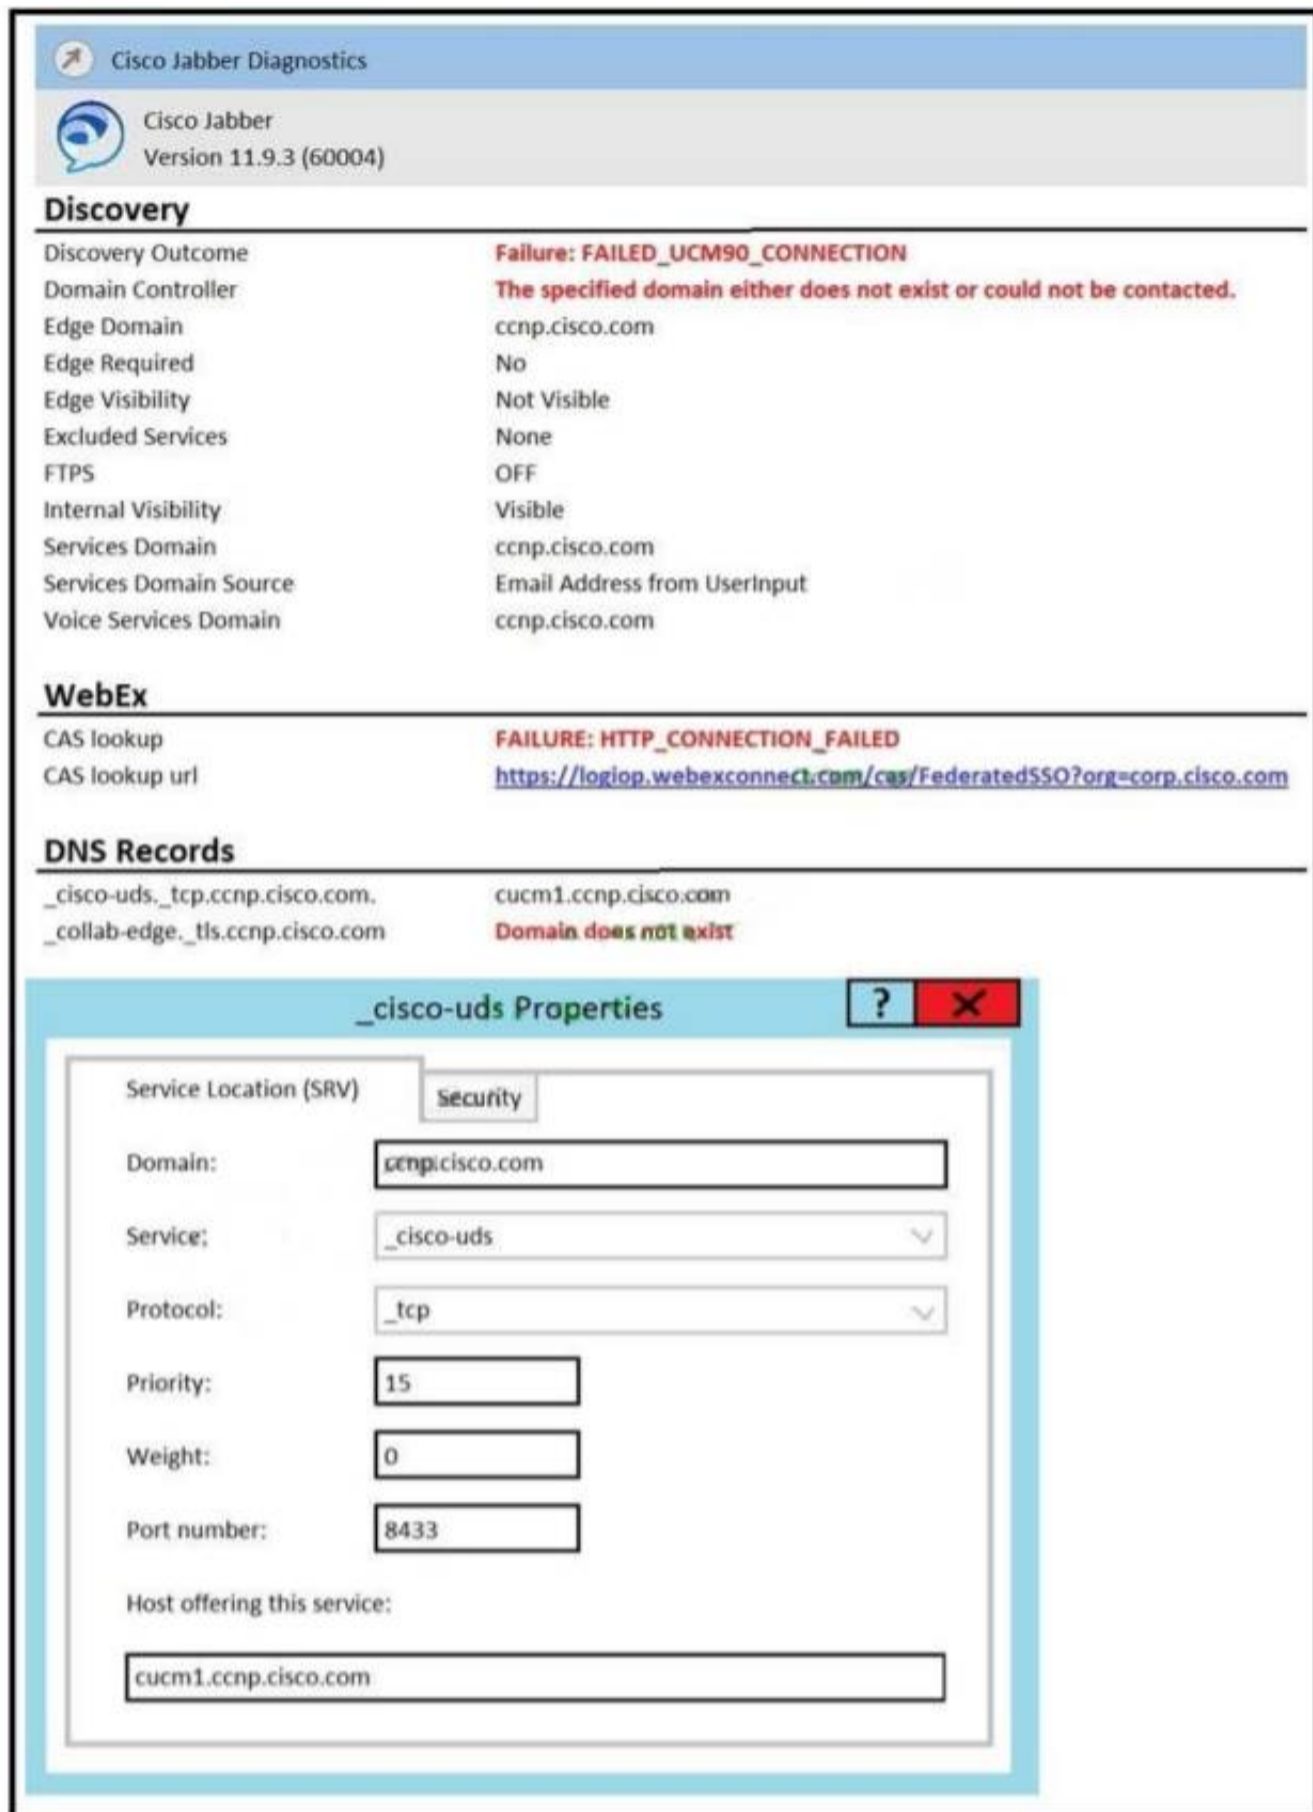

The exhibit consists of two screenshots. The top screenshot is the 'Cisco Jabber Diagnostics' window, showing the 'Discovery' section with a failure message: 'Failure: FAILED\_UCM90\_CONNECTION. The specified domain either does not exist or could not be contacted.' Below this, the 'WebEx' section shows a 'FAILURE: HTTP\_CONNECTION\_FAILED' for the CAS lookup url. The bottom screenshot is the '\_cisco-uds Properties' window, showing the 'Service Location (SRV)' tab with the following configuration: Domain: ccnp.cisco.com, Service: \_cisco-uds, Protocol: \_tcp, Priority: 15, Weight: 0, Port number: 8433, and Host offering this service: cucm1.ccnp.cisco.com.

Users connected to the internal network report a “Cannot communicate with the server” error while trying to log in to Cisco Jabber using auto service discovery. The Jabber diagnostics and the SRV record configuration are as shown in the exhibit. The host cucm1.ccnp.cisco.com is correctly resolved by the user desktops with the Cisco Unified Communications Manager IP address. Why is the user not able to log in?

- A. SRV protocol is not set up correctl
- B. It should be \_tls instead of \_tcp.
- C. Marking weight as 0 on the SRV record makes it inactive, so Jabber cannot discover the Cisco Unified CM.
- D. The port specified on the SRV record is wrong.
- E. The domain ccnp.cisco.com does not exist on the DNS server.

**Answer:** D

**Explanation:**

Reference: <https://community.cisco.com/t5/collaboration-voice-and-video/jabber-client-login-and-login-issues/ta-p/3143446>

#### NEW QUESTION 50

After integrating Cisco Unity Express with Cisco Unified Communications Manager Express, users report that the system does not respond to their digit presses. Which two configuration snippets resolve this issue? (Choose two.)

- A. dial-peer voice 6800 voip destination-pattern 5... session protocol sipv2 session target ipv4:10.3.6.127 dtmf-relay sip-kpml codec g729r8
- B. dial-peer voice 6800 voip destination-pattern 5... session protocol sipv2 session target ipv4:10.3.6.127 dtmf-relay sip-notify codec g711ulaw
- C. dial-peer voice 6800 voip destination-pattern 5... session protocol sipv2 session target ipv4:10.3.6.127 dtmf-relay rtp-nte codec g711ulaw
- D. dial-peer voice 6800 voip destination-pattern 5...session protocol sipv2 session target ipv4:10.3.6.127 dtmf-relay sip-kpml codec g711ulaw
- E. dial-peer voice 6800 voip destination-pattern 5... session protocol sipv2 session target ipv4:10.3.6.127 dtmf-relay sip-notify codec g729r8

**Answer:** BC

#### NEW QUESTION 53

What prevents toll fraud on voicemail ports?

- A. IP address trusted list on the PSTN gateway
- B. CSS
- C. Block OffNet to OffNet Transfer service parameter
- D. FAC

**Answer:** B

#### Explanation:

Reference: <https://www.cisco.com/c/en/us/support/docs/unified-communications/unity-connection/119337-technote-cuc-00.html>

#### NEW QUESTION 57

Which two SSO features are true? (Choose two.)

- A. allows Jabber to use LDAP directory services for contact imports
- B. allows LDAP user import on Cisco Unified Communications Manager
- C. improves productivity by reducing time spent re-entering credentials for the same identity
- D. transfers the authentication from the system that hosts the applications to a third-party system
- E. reduces costs by decreasing the number of help calls that are made for voicemail PIN resets

**Answer:** CD

#### Explanation:

Reference: [https://www.cisco.com/c/en/us/td/docs/voice\\_ip\\_comm/cucm/SAML\\_SSO\\_deployment\\_guide/11\\_0\\_1/CUCM\\_BK\\_SF9D0502\\_00\\_saml-ss0-deployment-guide-1101/CUCM\\_BK\\_SF9D0502\\_00\\_saml-ss0-deployment- guide11\\_chapter\\_01.html](https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cucm/SAML_SSO_deployment_guide/11_0_1/CUCM_BK_SF9D0502_00_saml-ss0-deployment-guide-1101/CUCM_BK_SF9D0502_00_saml-ss0-deployment- guide11_chapter_01.html)

#### NEW QUESTION 58

An engineer is configuring SAML SSO for a Cisco Unified Communications Manager. After completing all required steps, the engineer wants to verify the status. Which CLI command provides the status of SAML SSO?

- A. utils sso status
- B. show sso status
- C. show saml status
- D. utils saml status

**Answer:** A

#### Explanation:

Reference: <https://www.cisco.com/c/en/us/support/docs/unified-communications/unified-communications-manager-callmanager/213293-troubleshoot-ss0-in-cucm.html>

#### NEW QUESTION 59

DRAG DROP

Drag and drop the steps from the left into the correct order on the right that describes the flow of presence updates when a user manually sets the presence status in Cisco Jabber. Not all options are used.


Select and Place:

User manually sets presence status to "Off Shift"	step 1
Jabber sends an XMPP message on TCP port 5222 to the Cisco Presence Engine via the Cisco XCP Connection Manager and Cisco XCP Router.	step 2
Jabber sends an XMPP message on TCP port 5223 to the Presence Engine via the XCP federation Connection Manager and XCP Router.	step 3
The Presence Engine responds to Jabber via XCP Connection Manager and XCP Router with a confirmation of the status change.	

- A. Mastered
- B. Not Mastered


Answer: A

Explanation:

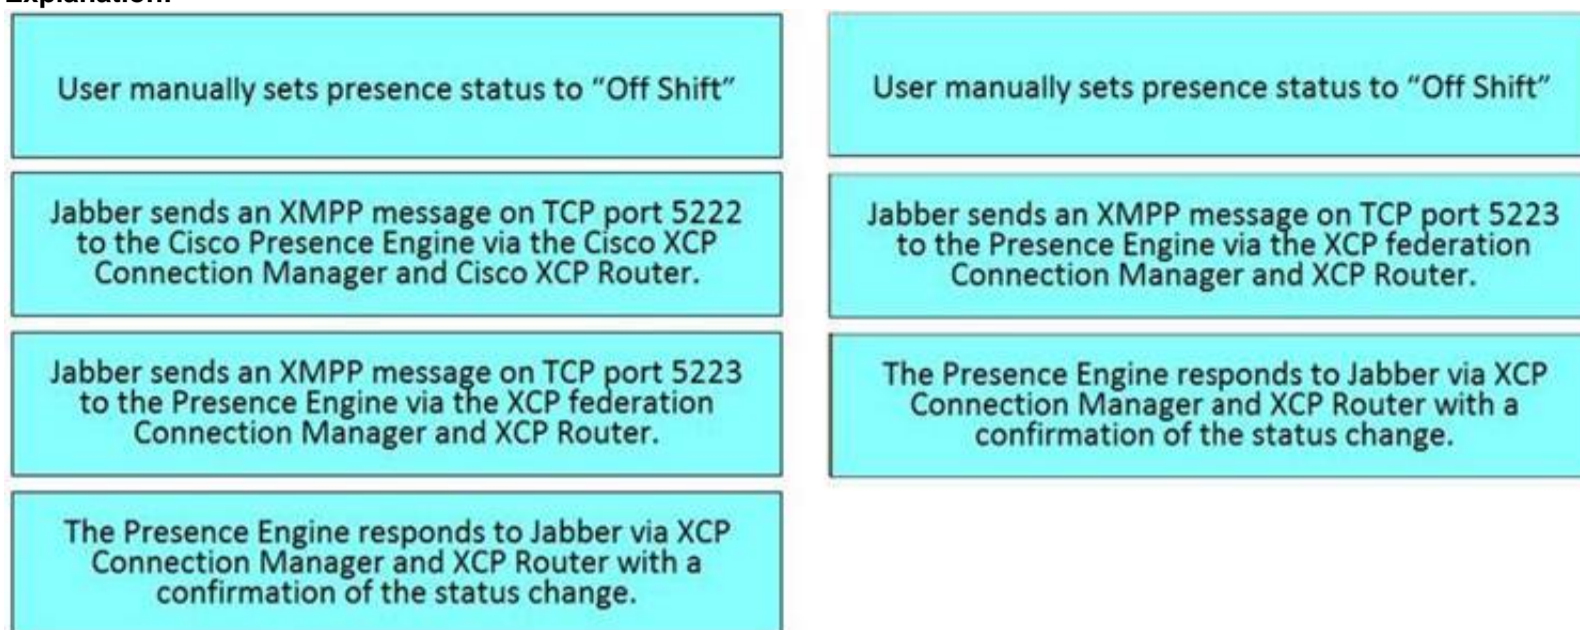

#### NEW QUESTION 62

Refer to the exhibit.

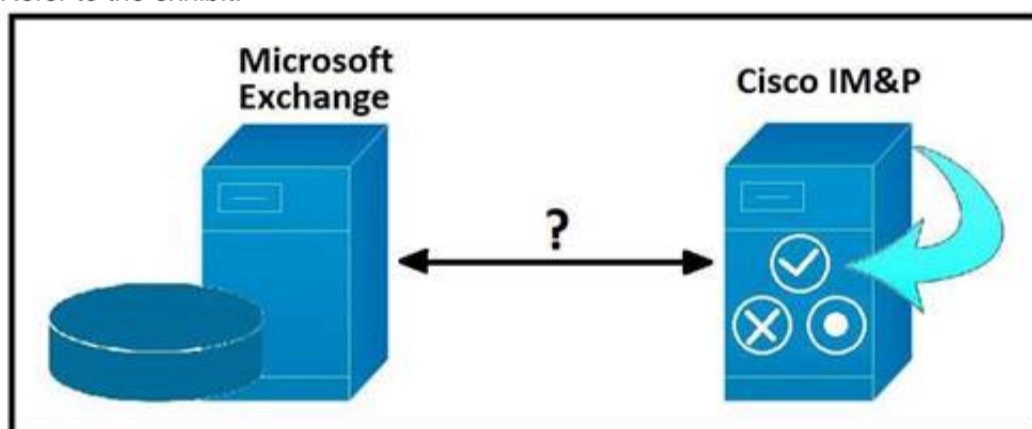

Which protocol is used for communication between Cisco IM and Presence and Microsoft Exchange Server?

- A. POP3
- B. IMAP
- C. EWS
- D. XMPP

Answer: C

Explanation:

Reference: [https://www.cisco.com/c/en/us/td/docs/voice\\_ip\\_comm/cucm/srnd/collab11/collab11/presence.html](https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cucm/srnd/collab11/collab11/presence.html)

#### NEW QUESTION 65

An engineer is checking the Cisco Unified Communications Manager and Cisco Unity Connection integration and presses the Message button on a phone to check the voicemail. Which action does Cisco Unified CM take?

- A. Cisco Unified CM looks up the voicemail pilot configured to dial.
- B. Cisco Unified CM routes the configured hunt pilot to Unity Connection.
- C. Cisco Unified CM looks up the hunt pilot configured to dial.
- D. Cisco Unified CM sends an AXL query to Unity Connection.

Answer: A

Explanation:

Reference: [https://www.cisco.com/c/en/us/td/docs/voice\\_ip\\_comm/cucm/admin/9\\_1\\_1/ccmsys/CUCM\\_BK\\_C5565591\\_00\\_cucm-system-guide-91/CUCM\\_BK\\_C5565591\\_00\\_cucm-system-guide-91\\_chapter\\_011110.html](https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cucm/admin/9_1_1/ccmsys/CUCM_BK_C5565591_00_cucm-system-guide-91/CUCM_BK_C5565591_00_cucm-system-guide-91_chapter_011110.html)

#### NEW QUESTION 67

Which step is the first for web-based single sign-on login?

- A. Authenticate.
- B. Redirect to IdP to get authenticated.
- C. Present authentication assertion.
- D. Request access to protected service.

Answer: D

#### NEW QUESTION 70

Refer to the exhibit.

High Availability			
<input checked="" type="checkbox"/> Enable High Availability			
Monitored Server	Assigned Users	Active Users	Server State
IMPPub.CiscoLiveUS.net	4	0	Failed Over
IMPSub.CiscoLiveUS.net	0	0	Running in Backup Mode

A customer reports that after a network failure, all of the Cisco Jabber clients are not switched back to their home nodes. An engineer determines that the primary Cisco IM&P server is in Failed Over state. Which two actions should be performed to bring the system back to operational state and to prevent future occurrences? (Choose two.)

- A. Advise all users to re-login to their Jabber clients.
- B. Confirm that both IM&P servers are configured in the Presence Redundancy Group configuration pane.
- C. Perform a restart of the IM&P primary server to force fallback.
- D. Click the Fallback button in the Server Action pane.
- E. Set the Automatic Failover parameter in the Server Recovery Manager Service Parameters to the value True.

**Answer:** BD

#### NEW QUESTION 75

.....

## THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual 300-810 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the 300-810 Product From:

<https://www.2passeasy.com/dumps/300-810/>

## Money Back Guarantee

### 300-810 Practice Exam Features:

- \* 300-810 Questions and Answers Updated Frequently
- \* 300-810 Practice Questions Verified by Expert Senior Certified Staff
- \* 300-810 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- \* 300-810 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year