

300-810 Dumps

Implementing Cisco Collaboration Applications (CLICA)

<https://www.certleader.com/300-810-dumps.html>



NEW QUESTION 1

When Cisco IM and Presence is configured to use automatic fallback, how long does the Server Recovery Manager service wait for a failed service/server to remain active before an automatic fallback is initiated?

- A. 10 minutes
- B. 20 minutes
- C. 30 minutes
- D. 1 hour

Answer: C

Explanation:

Reference: <https://www.cisco.com/c/en/us/support/docs/unified-communications/unified-communications-manager-im-presence-service/200958-IM-and-Presence-Server-High-Availability.html>

NEW QUESTION 2

Which two command line arguments can you specify when installing Cisco Jabber for windows? (Choose two.)

- A. CISCO_UDS_DOMAIN
- B. TFTP_ADDRESS
- C. VOICEMAIL_SERVER_ADDRESS
- D. SERVICES_DOMAIN
- E. TFTP

Answer: DE

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/jabber/11_0/CJAB_BK_D657A25F_00_deployment-installation-guide-jabber-110/CJAB_BK_D657A25F_00_deployment-installation-guide-jabber-110_chapter_01100.html#JABW_RF_CE43EF4C_00

NEW QUESTION 3

Refer to the exhibit.

The screenshot shows two configuration sections in a web interface. The top section, 'Voice Mail Port Information', has fields for 'Voice Mail Pilot Number' (4000), 'Calling Search Space' (< None >), and 'Description' (Default). A checkbox 'Make this the default Voice Mail Pilot for the system' is checked. The bottom section, 'Hunt Pilot Configuration', has a 'Save' button and a 'Status' field showing 'Status: Ready'. Below this is the 'Pattern Definition' section with fields for 'Hunt Pilot*' (4000), 'Route Partition' (INTERNAL_PT), and 'Description' (Hunt pilot for CUC). At the bottom is the 'Call Forward and Call Pickup Settings' section with a table for 'Calling Search Space Activation Policy'. The table has columns for 'Voice Mail', 'Destination', and 'Calling Search Space'. The 'Voice Mail' column has a checked box and the text 'Forward All'. The 'Destination' column has a text field with '4000'. The 'Calling Search Space' column has a dropdown menu with 'Use System Default' selected. Below the table, there is a 'Forward All' checkbox, an 'or' text, and a 'Calling Search Space' dropdown menu with '< None >' selected.

Cisco Unity Connection and Cisco Unified Communications Manager are integrated by using SCCP. The Voice Mail Ports are registered. Users report that calls fail when forwarded to voicemail. Which is a cause of the issue?

- A. The call forward and call pickup settings do not have a CSS on Forward All.
- B. The Voice Mail Port partition on the CSS of the phone is missing.
- C. The Voice Mail Pilot is not configured with a CSS that contains the INTERNAL_PT.
- D. The CSS on the Voice Mail Pilot is missing partitions for user phones.

Answer: D

NEW QUESTION 4

Refer to the exhibit.

```
2014-11-07 09:39:53, 855 ERROR [0X00000298] [ice\TelephonyAdapterPhoneDevice.cpp(178)] [TelephonyAdpter]
[TelephonyAdapter::selectDeviceImpl] – switchMode to device [SEP84802D7698D6] failed with error
[eDeviceRegCouldNotOpenDevice]
```

Which end-user option can resolve this issue?

- A. Standard CTI Reception of SRTP Key Material
- B. Standard CTI Allow Calling Number Modification
- C. Standard CTI Allow Control of Phones Supporting Rollover Mode
- D. Standard CTI Allow Call Monitoring

Answer: A

NEW QUESTION 5

Which function of the Cisco IM and Presence high availability solution is true?

- A. When the server has been restored to a normal state, user sessions remain on the backup server.
- B. When an event takes place, the end user sessions are not moved from the failed server to the backup.
- C. When the server has been restored, the server automatically fails back.
- D. When a high availability event takes place, the end user sessions are moved from the failed server to the backup.

Answer: D

Explanation:

Reference: <https://www.cisco.com/c/en/us/support/docs/unified-communications/unified-communications-manager-im-presence-service/200958-IM-and-Presence-Server-High-Availability.html>

NEW QUESTION 6

What is the maximum number of Cisco Unity Connection locations connected in a HTTPS network?

- A. 50
- B. 25
- C. 200
- D. 10

Answer: B

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/connection/10x/https_networking/guide/10xcuchttpsnetx/10xcuchttpsnet010.html

NEW QUESTION 7

What is the primary mechanism in Cisco Unity Connection that is used for toll fraud prevention?

- A. restriction tables
- B. fraud tables
- C. transfer rules
- D. calling search spaces

Answer: A

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/connection/10x/security/guide/10xcucsecx/10xcucsec020.pdf

NEW QUESTION 8

Which CLI command is used to collect traces from the Cisco Presence engine for seven days?

- A. file build log cisco_presence_engine 7
- B. file build log cisco_presence 168
- C. file build log presence_engine 7
- D. file build log presence_engine 168

Answer: A

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cucm/im_presence/configAdminGuide/12_0_1/cup0_b_config-admin-guide-imp-1201/cup0_b_config-admin-guide-imp-1201_chapter_010101.html

NEW QUESTION 9

SAML SSO is enabled in Cisco Unified Communications Manager. What happens when a browser-based client attempts to access a protected resource on a service provider?

- A. The browser follows the redirect and issues an HTTPS GET request to the IdP.
- B. The IdP checks for a valid browser session.
- C. The service provider generates a SAML authentication request.
- D. The SAML request is maintained as a query parameter in the GET request.

Answer: C

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cucm/SAML_SSO_deployment_guide/12_5_1/cucm_b_saml-ss0-deployment-guide-12_5/cucm_b_saml-ss0-deployment-guide-12_5_chapter_01.html

NEW QUESTION 10

Which two protocols does the Cisco IM Presence service use to federate with external domains? (Choose two.)

- A. XMPP
- B. SNMP
- C. SIP
- D. SCCP
- E. SMPP

Answer: AC

Explanation:

Reference: https://www.cisco.com/c/dam/en/us/td/docs/voice_ip_comm/cucm/im_presence/interdomain_federation/11_5_1/cup0_b_interdomain-federation-guide-imp-115.pdf

NEW QUESTION 10

Refer to the exhibit.

High Availability			
<input checked="" type="checkbox"/> Enable High Availability			
Monitored Server	Assigned Users	Active Users	Server State
IMPPub.CiscoLiveUS.net	4	0	Initializing
IMPSub.CiscoLiveUS.net	0	0	Initializing

After configuration of the Cisco IM&P cluster in high-availability mode, both IM&P servers remain in the initializing state. Which two actions ensure normal operations of this IM&P high-availability cluster? (Choose two.)

- A. Clear the Enable High Availability check box in the Presence Redundancy Group configuration.
- B. Confirm that Cisco Presence Engine, Cisco XCP Router, and Cisco DB services are up and running on both IM&P servers.
- C. Restart the Server Recovery Manager service in Cisco Unified Serviceability – Network Services on both IM&P servers.
- D. Verify that the Cisco XCP SIP Federation Connection Manager service is running.
- E. Ensure that an equal number of users are assigned to each IM&P server.

Answer: CE

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cucm/im_presence/configAdminGuide/10_5_1/CUP0_BK_CE43108E_00_config-admin-guide-imp-105/CUP0_BK_CE43108E_00_config-admin-guide-imp105_chapter_010010.html

NEW QUESTION 12

Refer to the exhibit.

Users with Duplicate User IDs

User ID : user3
Node Name
cucm-imp-1
cucm-imp-2

Which two steps resolve the “Users with Duplicate User IDs” message? (Choose two.)

- A. Rename the directory URI value for one of the users to ensure that there is no duplication.
- B. Rename the User ID value for one user if different users on different clusters have the same User ID assigned.
- C. Unassign a user from one of the clusters when the same user is assigned to two different clusters.
- D. Assign the duplicate user to the secondary Cisco IM and Presence node.
- E. Delete the user ID for the duplicate user ID.

Answer: BC

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cucm/im_presence/configAdminGuide/10_0_1/CUP0_BK_C318987B_00_config-admin-guide-imp-100/CUP0_BK_C318987B_00_config-admin-guide-imp100_chapter_010101.html

NEW QUESTION 13

In the integration of Cisco Unity Connection using SIP, which SIP trunk security profile option is required for MWI to work correctly?

- A. Accept out-of-dialog refer
- B. Accept replaces header
- C. Accept unsolicited notification
- D. Accept presence subscription

Answer: A

NEW QUESTION 14

Which SIP request type is used by Cisco Unity Connection to inform Cisco Unified Communications manager that the Message Waiting Indicator must be turned on or off for a specific line?

- A. NOTIFY
- B. UPDATE
- C. SUBSCRIBE
- D. PUBLISH

Answer: A

NEW QUESTION 15

DRAG DROP

Drag and drop the events for an on-premises Jabber SAML SSO flow from the left into the correct order on the right.

Service Provider Authorization request	Step 1
SSO Mode Discovery	Step 2
IDP Authentication	Step 3
Service Provider Authentication	Step 4

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

SSO Mode Discovery
IDP Authentication
Service Provider Authentication
Service Provider Authorization request

NEW QUESTION 18

When trying to send a call out of Cisco Unity Connection, what happens when enabling the transfer to an alternate contact number, located under caller input?

- A. The restriction table is checked when an administrator changes the extension number via the Cisco Unity Connection admin page.
- B. The restriction table is not checked when an administrator changes the extension number via the Cisco Unity Connection admin page.
- C. The restriction table is not checked when a user changes the extension number via a TUI conversation.
- D. The restriction table is not checked when a user changes extension number via the Cisco Unity Connection Cisco PCA page.

Answer: B

Explanation:

Reference: <https://www.cisco.com/c/en/us/support/docs/unified-communications/unity-connection/117559-probsol-transferfailure-00.html>

NEW QUESTION 22

Secure XMPP communication is required for XMPP federation with external domains and the Cisco IM and Presence. Which certificate is used for XMPP

interdomain federation when connecting to an externally federated domain?

- A. cup
- B. cup-xmpp
- C. cup-xmpp-s2s
- D. Tomcat

Answer: C

Explanation:

Reference: https://www.cisco.com/c/dam/en/us/td/docs/telepresence/infrastructure/vcs/config_guide/X8-2/XMPP-Federation-with-Cisco-VCS-and-IM-and-Presence-Service.pdf

NEW QUESTION 25

An end user opened a ticket, stating that before logging in to Jabber for Windows, a warning is displayed that a server certificate has expired. Which two certificates must be verified on the Cisco Unified Communications Manager and IM&P deployment? (Choose two.)

- A. capf on Cisco Unified CM
- B. cup-xmpp on IM&P
- C. callmanager on Cisco Unified CM
- D. tomcat on Cisco Unified CM
- E. cup on IM&P

Answer: AB

NEW QUESTION 26

What prevents toll fraud on voicemail ports?

- A. IP address trusted list on the PSTN gateway
- B. CSS
- C. Block OffNet to OffNet Transfer service parameter
- D. FAC

Answer: B

Explanation:

Reference: <https://www.cisco.com/c/en/us/support/docs/unified-communications/unity-connection/119337-technote-cuc-00.html>

NEW QUESTION 29

Which statement describes a role of AXL communications in the BLF Plug-in Service of the Cisco Unified Attendant Console?

- A. The AXL communications allow registered attendants to log in to Cisco Unified Communications Manager and receive calls.
- B. The AXL communications enable Device Resolution Manager to resolve the device statuses of operator and system devices.
- C. The AXL communications is required after installation to verify that the specified CTI manager or managers and Cisco Unified Attendant Console versions match.
- D. The AXL communications is required after installation to verify that the specified CTI manager or managers and Cisco Unified CM versions.

Answer: D

Explanation:

Reference: https://www.cisco.com/c/dam/en/us/td/docs/voice_ip_comm/cucmac/cuaca/12_0_4/design_guides/CUACA_DG_120401.pdf

NEW QUESTION 33

Which type of SRV record provides the location of Cisco Expressway-E?

- A. _collab-edge._tls.example.com
- B. _cisco-uds._tcp.example.com
- C. _cuplogin._tcp.example.com
- D. _http._tcp.example.com

Answer: A

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/jabber/Windows/9_7/CJAB_BK_C606D8A9_00_cisco-jabber-dns-configuration-guide/CJAB_BK_C606D8A9_00_cisco-jabber-dns-configuration-guide_chapter_010.html

NEW QUESTION 38

Refer to the exhibit.

Direct Routing Rules in Descending Order of Precedence

Delete Selected
Add New
Change Order

	Display Name	Status	Dialed Number	Calling Number	Phone System
<input type="checkbox"/>	NewYork_AA	Active	11112222		
<input type="checkbox"/>	Attempt Sign In	Active			
<input type="checkbox"/>	Chicago_AA	Active	22221111		
<input type="checkbox"/>	Opening Greeting	Active			

Delete Selected
Add New
Change Order

Forwarded Routing Rules in Descending Order of Precedence

Delete Selected
Add New
Change Order

	Display Name	Status	Dialed Number	Calling Number	Forwarding Station
<input type="checkbox"/>	Attempt Forward	Active			
<input type="checkbox"/>	Dallas_AA	Active	2222		
<input type="checkbox"/>	Arizona_AA	Active	11112222		
<input type="checkbox"/>	Opening Greeting	Active			

Delete Selected
Add New
Change Order

Calls that are not answered by the user are for the location. If the user at extension 11112222 does not have a voice mailbox, which rule is utilized when Cisco Unity Communication receives the forwarded call?

- A. NewYork_AA
- B. Attempt Sign In
- C. Arizona_AA
- D. Opening_Greeting

Answer: C

NEW QUESTION 39

Which DNS record is used for on-premises service by Jabber clients?

- A. _collab-edge._tcp.<domain> SRV record
- B. _cisco-uds._tls.<domain> SRV record
- C. _cisco-uds._tcp.<domain> SRV record
- D. <tftp server FQDN> A record

Answer: C

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/jabber/Windows/9_7/CJAB_BK_C606D8A9_00_cisco-jabber-dns-configuration-guide/CJAB_BK_C606D8A9_00_cisco-jabber-dns-configuration-guide_chapter_010.html

NEW QUESTION 43

Fraudulent calls are being made from Cisco Unity Connection. Which action prevents the calls from reaching the PSTN using SCCP integration?

- A. Change the configuration of the routing rule.
- B. Change the CSS of the voicemail port.
- C. Change the Rerouting CSS on the trunk to Cisco Unity Connection.
- D. Remove values from restriction table.

Answer: B

Explanation:


Reference: <https://www.cisco.com/c/en/us/support/docs/unified-communications/unity-connection/119337-technote-cuc-00.html>

NEW QUESTION 45

DRAG DROP

Drag and drop the steps from the left into the correct order on the right that describes the flow of presence updates when a user manually sets the presence status in Cisco Jabber. Not all options are used.


Select and Place:

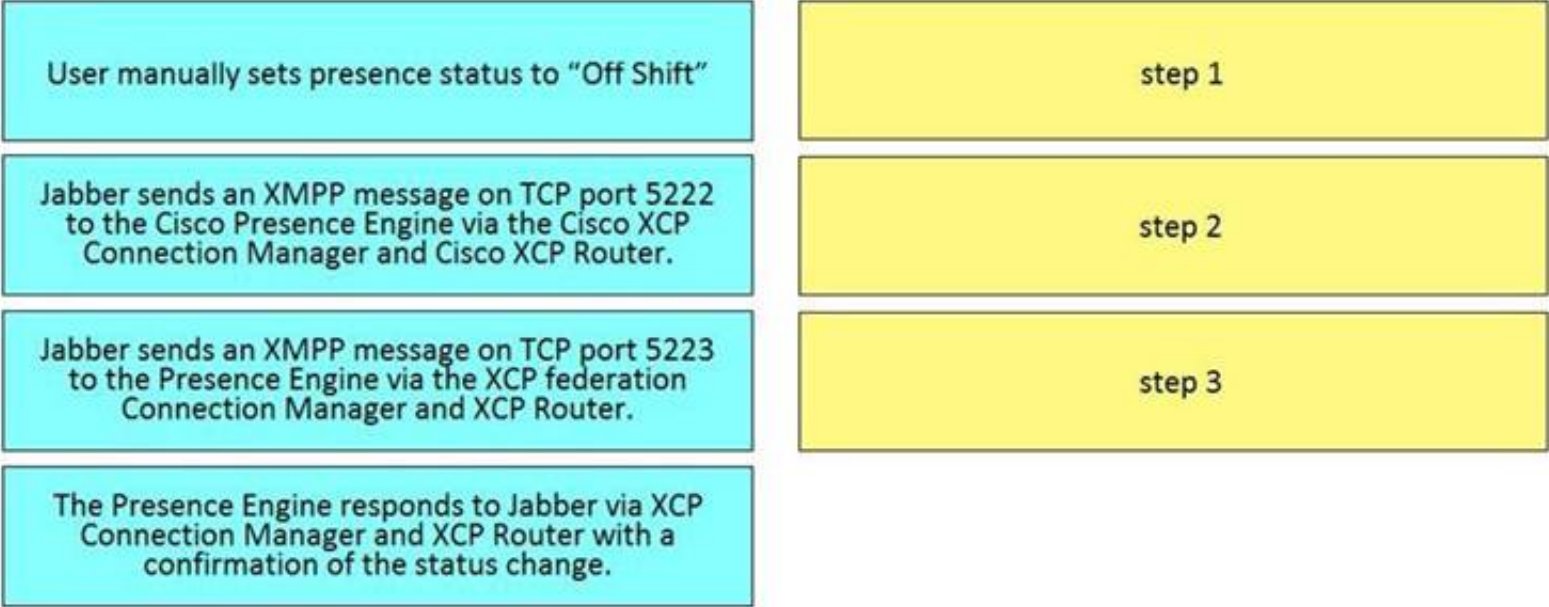

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

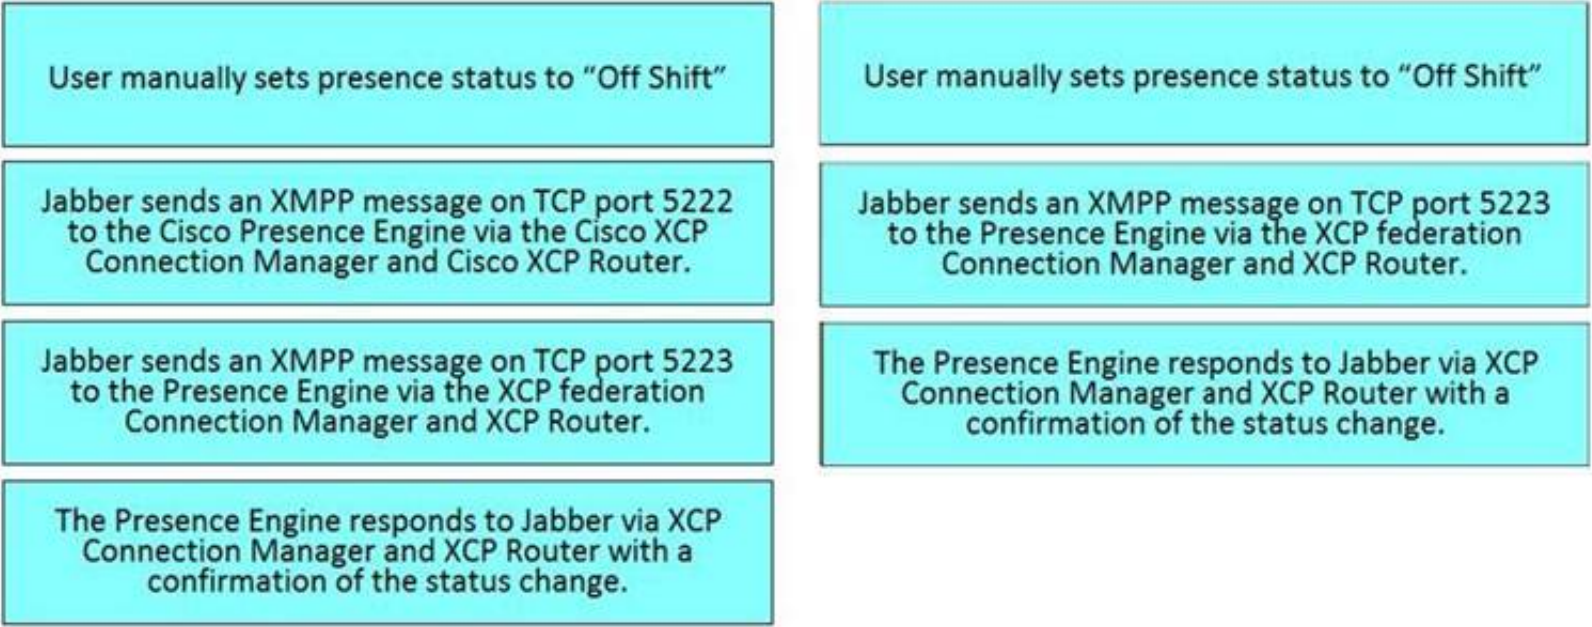

NEW QUESTION 47

How is automatic fallback enabled on a Cisco IM and Presence server?

- A. In IM and Presence Service Parameter Configuration > Cisco Server Recovery Manager, change the Failover parameter to True.
- B. In Communications Manager Service Parameter Configuration > Cisco Server Recovery Manager, change the Enable Automatic Fallback parameter to True.
- C. Automatic fallback is enabled by default.
- D. In the Presence Redundancy Group Configuration > Cisco Unified Communications Manager, check the Enable Automatic Fallback parameter.

Answer: B

Explanation:

Reference: <https://www.cisco.com/c/en/us/support/docs/unified-communications/unified-communications-manager-im-presence-service/200958-IM-and-Presence-Server-High-Availability.html>

NEW QUESTION 48

Refer to the exhibit.

High Availability			
<input checked="" type="checkbox"/> Enable High Availability			
Monitored Server	Assigned Users	Active Users	Server State
IMPPub.CiscoLiveUS.net	4	0	Failed Over
IMPSub.CiscoLiveUS.net	0	0	Running in Backup Mode

A customer reports that after a network failure, all of the Cisco Jabber clients are not switched back to their home nodes. An engineer determines that the primary Cisco IM&P server is in Failed Over state. Which two actions should be performed to bring the system back to operational state and to prevent future occurrences? (Choose two.)

- A. Advise all users to re-login to their Jabber clients.
- B. Confirm that both IM&P servers are configured in the Presence Redundancy Group configuration pane.
- C. Perform a restart of the IM&P primary server to force fallback.
- D. Click the Fallback button in the Server Action pane.
- E. Set the Automatic Failover parameter in the Server Recovery Manager Service Parameters to the value True.

Answer: BD

NEW QUESTION 52

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your 300-810 Exam with Our Prep Materials Via below:

<https://www.certleader.com/300-810-dumps.html>