

350-401 Dumps

Implementing and Operating Cisco Enterprise Network Core Technologies

<https://www.certleader.com/350-401-dumps.html>



NEW QUESTION 1

A network administrator is implementing a routing configuration change and enables routing debugs to track routing behavior during the change. The logging output on the terminal is interrupting the command typing process. Which two actions can the network administrator take to minimize the possibility of typing commands incorrectly? (Choose two.)

- A. Configure the logging synchronous global configuration command
- B. Configure the logging delimiter feature
- C. Configure the logging synchronous command under the vty
- D. Press the TAB key to reprint the command in a new line
- E. increase the number of lines on the screen using the terminal length command

Answer: CD

NEW QUESTION 2

A network is being migrated from IPV4 to IPV6 using a dual-stack approach. Network management is already 100% IPV6 enabled. In a dual-stack network with two dual-stack NetFlow collections, how many flow exporters are needed per network device in the flexible NetFlow configuration?

- A. 1
- B. 2
- C. 4
- D. 8

Answer: B

NEW QUESTION 3

Refer to the exhibit.

```
Extended IP access list EGRESS
10 permit ip 10.0.0.0 0.0.0.255 any
|
<Output Omitted>
|
interface GigabitEthernet0/0
ip address 209.165.200.225 255.255.255.0
ip access-group EGRESS out
duplex auto
speed auto
media-type rj45
|
```

An engineer must block all traffic from a router to its directly connected subnet 209.165.200.0/24. The engineer applies access control list EGRESS in the outbound direction on the GigabitEthernet0/0 interface of the router. However, the router can still ping hosts on the 209.165.200.0/24 subnet. Which

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

of this behavior is true?

- A. Access control lists that are applied outbound to a router interface do not affect traffic that is sourced from the router.
- B. Only standard access control lists can block traffic from a source IP address.
- C. After an access control list is applied to an interface, that interface must be shut and no shut for the access control list to take effect.
- D. The access control list must contain an explicit deny to block traffic from the router.

Answer: A

NEW QUESTION 4

A client device fails to see the enterprise SSID, but other devices are connected to it. What is the cause of this issue?

- A. The hidden SSID was not manually configured on the client.
- B. The broadcast SSID was not manually configured on the client.
- C. The client has incorrect credentials stored for the configured hidden SSID.
- D. The client has incorrect credentials stored for the configured broadcast SSID.

Answer: A

NEW QUESTION 5

Which HTTP status code is the correct response for a request with an incorrect password applied to a REST API session?

- A. HTTP Status Code 200
- B. HTTP Status Code 302
- C. HTTP Status Code 401
- D. HTTP Status Code: 504

Answer: C

NEW QUESTION 6

What the role of a fusion in an SD-Access solution?

- A. provides connectivity to external networks
- B. acts as a DNS server
- C. performs route leaking between user-defined virtual networks and shared services
- D. provides additional forwarding capacity to the fabric

Answer: C

NEW QUESTION 7

Which exhibit displays a valid JSON file?

- ```
{
 "hostname": "edge_router_1"
 "interfaces": {
 "GigabitEthernet1/1"
 "GigabitEthernet1/2"
 "GigabitEthernet1/3"
 }
}
```
- ```
{
  "hostname": "edge_router_1",
  "interfaces": {
    "GigabitEthernet1/1",
    "GigabitEthernet1/2",
    "GigabitEthernet1/3",
  },
}
```
- ```
{
 "hostname": "edge_router_1"
 "interfaces": {
 "GigabitEthernet1/1"
 "GigabitEthernet1/2"
 "GigabitEthernet1/3"
 }
}
```
- ```
{
  "hostname": "edge_router_1",
  "interfaces": {
    "GigabitEthernet1/1",
    "GigabitEthernet1/2",
    "GigabitEthernet1/3"
  }
}
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: D

NEW QUESTION 8

Which DNS lookup does an access point perform when attempting CAPWAP discovery?

- A. CISCO-DNA-CONTROLLER local
- B. CAPWAP-CONTROLLER local
- C. CISCO-CONTROLLER local
- D. CISCO-CAPWAP-CONTROLLER local

Answer: D

NEW QUESTION 9

What is a benefit of data modeling languages like YANG?

- A. They enable programmers to change or write their own application within the device operating system.
- B. They create more secure and efficient SNMP OIDs.
- C. They make the CLI simpler and more efficient.
- D. They provide a standardized data structure, which results in configuration scalability and consistency.

Answer: D

NEW QUESTION 10

Which statement about an RSPAN session configuration is true?

- A. A filter must be configured for RSPAN Regions
- B. Only one session can be configured at a time
- C. A special VLAN type must be used as the RSPAN destination.
- D. Only incoming traffic can be monitored

Answer: C

NEW QUESTION 10


A local router shows an EBGP neighbor in the Active state. Which statement is true about the local router?

- A. The local router has active prefix in the forwarding table from the neighboring router
- B. The local router has BGP passive mode configured for the neighboring router
- C. The local router is attempting to open a TCP session with the neighboring router.
- D. The local router is receiving prefixes from the neighboring router and adding them in RIB-IN

Answer: C

NEW QUESTION 12

Refer to the exhibit.

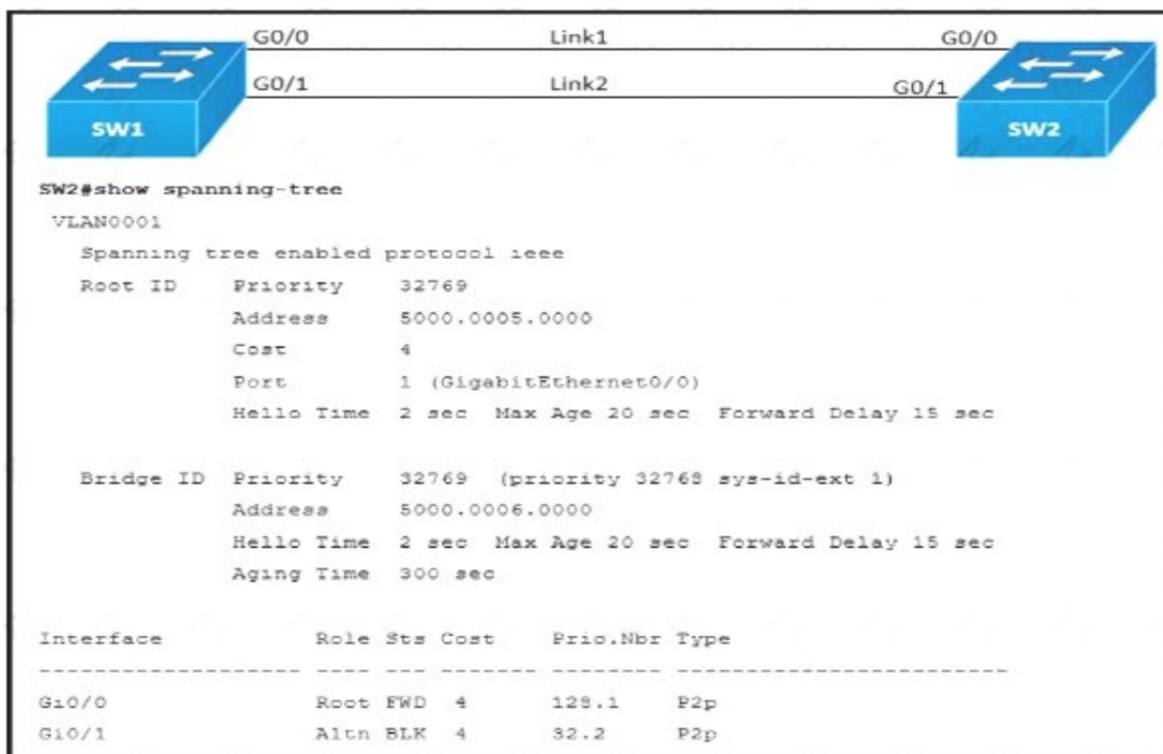

Link1 is a copper connection and Link2 is a fiber connection. The fiber port must be the primary port for all forwarding. The output of the show spanning-tree command on SW2 shows that the fiber port is blocked by spanning tree. An engineer enters the spanning-tree port-priority 32 command on G0/1 on SW2, but the port remains blocked. Which command should be entered on the ports that are connected to Link2 to resolve the issue?

- A. Enter spanning-tree port-priority 32 on SW1.
- B. Enter spanning-tree port-priority 224 on SW1.
- C. Enter spanning-tree port-priority 4 on SW2.
- D. Enter spanning-tree port-priority 64 on SW2.

Answer: A

NEW QUESTION 17

Refer to this output. What is the logging severity level?

R1#Feb 14 37:15:12:429: %LINEPROTO-5-UPDOWN Line protocol on interface GigabitEthernet0/1. Change state to up

- A. Notification
- B. Alert
- C. Critical
- D. Emergency

Answer: A

NEW QUESTION 21

Which feature must be configured to allow packet capture over Layer 3 infrastructure'?

- A. VSPAN
- B. IPSPAN
- C. RSPAN
- D. ERSPAN

Answer: D

NEW QUESTION 22

What is the difference between the enable password and the enable secret password when service password encryption is enable on an IOS device?

- A. The enable password is encrypted with a stronger encryption method.
- B. There is no difference and both passwords are encrypted identically.
- C. The enable password cannot be decrypted.
- D. The enable secret password is protected via stronger cryptography mechanisms.

Answer: D

NEW QUESTION 23

Refer to the exhibit.

```
R1#debug ip ospf hello
R1#debug condition interface Fa0/1
Condition 1 Set
```


Which statement about the OPSF debug output is true?

- A. The output displays all OSPF messages which router R1 has sent to received on interface Fa0/1.
- B. The output displays all OSPF messages which router R1 has sent or received on all interfaces.
- C. The output displays OSPF hello messages which router R1 has sent received on interface Fa0/1.
- D. The output displays OSPF hello and LSACK messages which router R1 has sent or received.

Answer: C

NEW QUESTION 27

Refer to the exhibit.

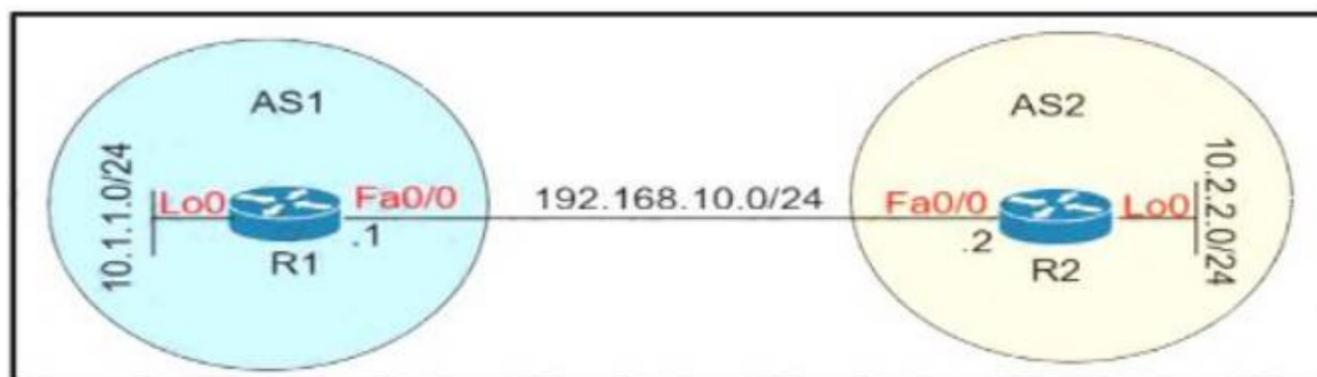

Which configuration establishes EBGp neighborhood between these two directly connected neighbors and exchanges the loopback network of the two routers through BGP?

A)
R1(config)#router bgp 1
R1(config-router)#neighbor 192.168.10.2 remote-as 2
R1(config-router)#network 10.1.1.0 mask 255.255.255.0

R2(config)#router bgp 2
R2(config-router)#neighbor 192.168.10.1 remote-as 1
R2(config-router)#network 10.2.2.0 mask 255.255.255.0

B)
R1(config)#router bgp 1
R1(config-router)#neighbor 10.2.2.2 remote-as 2
R1(config-router)#network 10.1.1.0 mask 255.255.255.0
R2(config)#router bgp 2
R2(config-router)#neighbor 10.1.1.1 remote-as 1
R2(config-router)#network 10.2.2.0 mask 255.255.255.0

C)
R1(config)#router bgp 1
R1(config-router)#neighbor 192.168.10.2 remote-as 2
R1(config-router)#network 10.0.0.0 mask 255.0.0.0
R2(config)#router bgp 2
R2(config-router)#neighbor 192.168.10.1 remote-as 1
R2(config-router)#network 10.0.0.0 mask 255.0.0.0

D)
R1(config)#router bgp 1
R1(config-router)#neighbor 10.2.2.2 remote-as 2
R1(config-router)#neighbor 10.2.2.2 update-source lo0
R1(config-router)#network 10.1.1.0 mask 255.255.255.0
R2(config)#router bgp 2
R2(config-router)#neighbor 10.1.1.1 remote-as 1
R2(config-router)#neighbor 10.1.1.1 update-source lo0
R2(config-router)#network 10.2.2.0 mask 255.255.255.0

- A. Option A
- B. Option B
- C. Option C

D. Option D

Answer: A

NEW QUESTION 29

Which method displays text directly into the active console with a synchronous EEM applet policy?

- A. event manager applet boom event syslog pattern 'UP'action 1.0 gets 'logging directly to console'
- B. event manager applet boom event syslog pattern 'UP'action 1.0 syslog priority direct msg 'log directly to console'
- C. event manager applet boom event syslog pattern 'UP'action 1.0 puts 'logging directly to console'
- D. event manager applet boom event syslog pattern 'UP'action 1.0 string 'logging directly to console'

Answer: B

NEW QUESTION 30

To increase total throughput and redundancy on the links between the wireless controller and switch, the customer enabled LAG on the wireless controller Which EtherChannel mode must be configured on the switch to allow the WLC to connect?

- A. Auto
- B. Active
- C. On
- D. Passive

Answer: C

NEW QUESTION 32

Refer to the exhibit.

```
SwitchC#show vtp status
VTP Version                : 2
Configuration Revision     : 0
Maximum VLANs supported locally : 255
Number of existing VLANs   : 8
VTP Operating Mode        : Transparent
VTP Domain Name           : cisco.com
VTP Pruning Mode          : Disabled
VTP V2 Mode               : Disabled
VTP Traps Generation      : Disabled
MDS digest                 : 0xE5 0x28 0x5D 0x3E 0x2F 0xE5 0xAD 0x2B
Configuration last modified by 0.0.0.0 at 1-10-19 09:01:38

SwitchC#show vlan brief

VLAN Name                Status      Ports
-----
1    default                active     Fa0/3, Fa0/4, Fa0/5, Fa0/6
                                           Fa0/7, Fa0/8, Fa0/9, Fa0/10
                                           Fa0/11, Fa0/12, Fa0/13, Fa0/14
                                           Fa0/15, Fa0/16, Fa0/17, Fa0/18
                                           Fa0/19, Fa0/20, Fa0/21, Fa0/22
                                           Fa0/23, Fa0/24, Po1
110  Finance                 active
210  HR                       active     Fa0/1
310  Sales                    active     Fa0/2
[...output omitted...]

SwitchC#show int trunk
Port      Mode      Encapsulation  Status      Native vlan
Gig1/1    on        802.1q         trunking    1
Gig1/2    on        802.1q         trunking    1

Port      Vlans allowed on trunk
Gig1/1    1-1005
Gig1/2    1-1005

Port      Vlans allowed and active in management domain
Gig1/1    1,110,210,310
Gig1/2    1,110,210,310

Port      Vlans in spanning tree forwarding state and not pruned
Gig1/1    1,110,210,310
Gig1/2    1,110,210,310

SwitchC#show run interface port-channel 1
interface Port-channel 1
 description Uplink_to_Core
 switchport mode trunk
```

SwitchC connects HR and Sales to the Core switch However, business needs require that no traffic from the Finance VLAN traverse this switch Which command meets this requirement?

A)

SwitchC(config)#vtp pruning

B) SwitchC(config)#vtp pruning vlan 110

C) SwitchC(config)#interface port-channel 1
SwitchC(config-if)#switchport trunk allowed vlan add 210,310


D) SwitchC(config)#interface port-channel 1
SwitchC(config-if)#switchport trunk allowed vlan remove 110

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: D

NEW QUESTION 34

Refer to the exhibit.

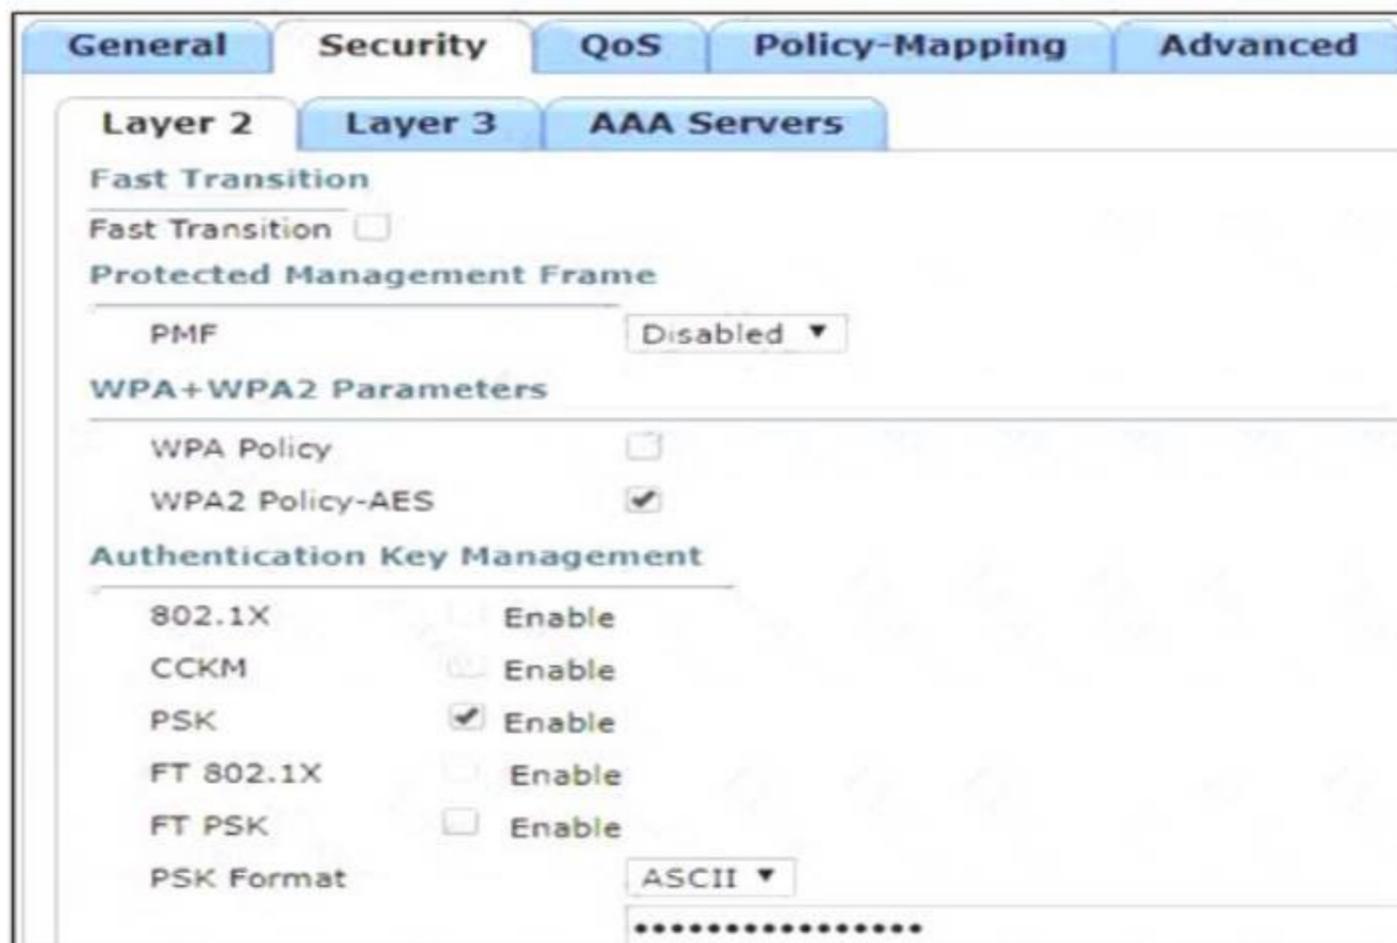

Based on the configuration in this WLAN security setting, Which method can a client use to authenticate to the network?

- A. text string
- B. username and password
- C. certificate
- D. RADIUS token

Answer: A

NEW QUESTION 36

What are two benefits of virtualizing the server with the use of VMs in data center environment? (Choose two.)

- A. Increased security
- B. reduced rack space, power, and cooling requirements
- C. reduced IP and MAC address requirements
- D. speedy deployment
- E. smaller Layer 2 domain

Answer: BD

NEW QUESTION 37

Which feature does Cisco TrustSec use to provide scalable, secure communication throughout a network?

- A. security group tag ACL assigned to each port on a switch
- B. security group tag number assigned to each port on a network
- C. security group tag number assigned to each user on a switch
- D. security group tag ACL assigned to each router on a network

Answer: B

NEW QUESTION 40

A client with IP address 209.165.201.25 must access a web server on port 80 at 209.165.200.225. To allow this traffic, an engineer must add a statement to an access control list that is applied in the inbound direction on the port connecting to the web server. Which statement allows this traffic?

- A. permit tcp host 209.165.200.225 eq 80 host 209.165.201.25
- B. permit tcp host 209.165.201.25 host 209.165.200.225 eq 80
- C. permit tcp host 209.165.200.225 lt 80 host 209.165.201.25
- D. permit tcp host 209.165.200.225 host 209.165.201.25 eq 80

Answer: B

NEW QUESTION 41

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your 350-401 Exam with Our Prep Materials Via below:

<https://www.certleader.com/350-401-dumps.html>