



Paloalto-Networks

Exam Questions PCNSE

Palo Alto Networks Certified Security Engineer (PCNSE) PAN-OS 8.0

NEW QUESTION 1

What is the purpose of the firewall decryption broker?

- A. Decrypt SSL traffic a then send it as cleartext to a security chain of inspection tools
- B. Force decryption of previously unknown cipher suites
- C. Inspection traffic within IPsec tunnel
- D. Reduce SSL traffic to a weaker cipher before sending it to a security chain of inspection tools

Answer: A

NEW QUESTION 2


Which three split tunnel methods are supported by a globalProtect gateway? (Choose three.)

- A. video streaming application
- B. Client Application Process
- C. Destination Domain
- D. Source Domain
- E. Destination user/group
- F. URL Category

Answer: ABC

NEW QUESTION 3

Based on the image, what caused the commit warning?

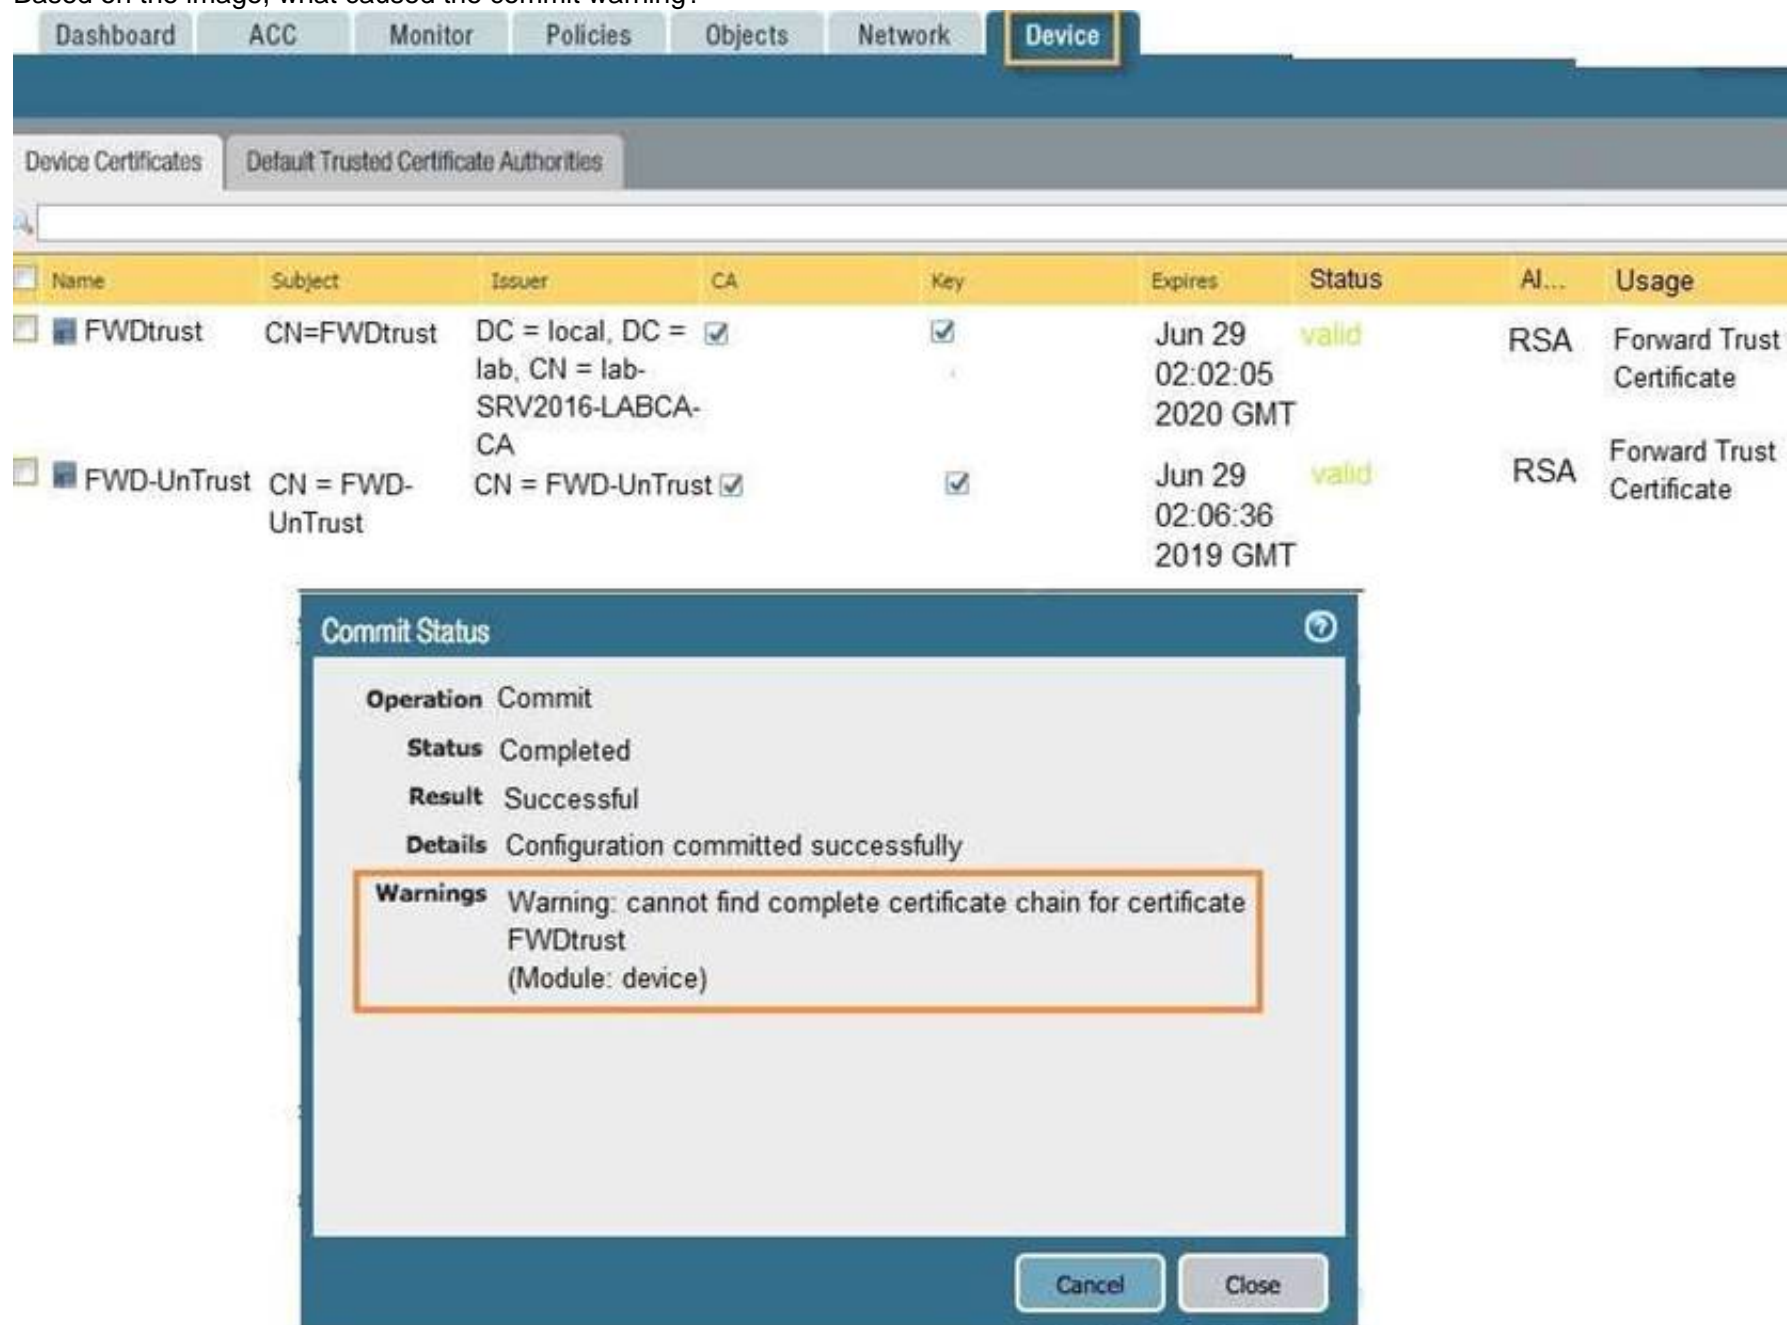

The screenshot shows the Palo Alto Networks GUI with the 'Device' tab selected. Under 'Device Certificates', there are two certificates listed:

Name	Subject	Issuer	CA	Key	Expires	Status	AI...	Usage
FWDtrust	CN=FWDtrust	DC = local, DC = lab, CN = lab-SRV2016-LABCA-CA	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Jun 29 02:02:05 2020 GMT	valid	RSA	Forward Trust Certificate
FWD-UnTrust	CN = FWD-UnTrust	CN = FWD-UnTrust	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Jun 29 02:06:36 2019 GMT	valid	RSA	Forward Trust Certificate

A 'Commit Status' dialog box is open, showing the following details:

- Operation: Commit
- Status: Completed
- Result: Successful
- Details: Configuration committed successfully
- Warnings: Warning: cannot find complete certificate chain for certificate FWDtrust (Module: device)

- A. The CA certificate for FWDtrust has not been imported into the firewall.
- B. The FWDtrust certificate has not been flagged as Trusted Root CA.
- C. SSL Forward Proxy requires a public certificate to be imported into the firewall.
- D. The FWDtrust certificate does not have a certificate chain.

Answer: D

NEW QUESTION 4

An administrator is defining protection settings on the Palo Alto Networks NGFW to guard against resource exhaustion. When platform utilization is considered, which steps must the administrator take to configure and apply packet buffer protection?

- A. Enable and configure the Packet Buffer protection thresholds.Enable Packet Buffer Protection per ingress zone.
- B. Enable and then configure Packet Buffer thresholdsEnable Interface Buffer protection.

- C. Create and Apply Zone Protection Profiles in all ingress zones.Enable Packet Buffer Protection per ingress zone.
- D. Configure and apply Zone Protection Profiles for all egress zones.Enable Packet Buffer Protection pre egress zone.
- E. Enable per-vsyz Session Threshold alerts and triggers for Packet Buffer Limits.Enable Zone Buffer Protection per zone.

Answer: A

NEW QUESTION 5

What are the two behavior differences between Highlight Unused Rules and the Rule Usage Hit counter when a firewall is rebooted? (Choose two.)

- A. Rule Usage Hit counter will not be reset
- B. Highlight Unused Rules will highlight all rules.
- C. Highlight Unused Rules will highlight zero rules.
- D. Rule Usage Hit counter will reset.

Answer: AB

NEW QUESTION 6

A customer wants to set up a VLAN interface for a Layer 2 Ethernet port.
 Which two mandatory options are used to configure a VLAN interface? (Choose two.)

- A. Virtual router
- B. Security zone
- C. ARP entries
- D. Netflow Profile

Answer: AB

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/80/pan-os/web-interface-help/network/network-interfaces/pa-7000-series-layer-2-interface#idd2bcaacc-54b9-4ec9-a1dd-8064499f5b9d>

NEW QUESTION 7


An administrator pushes a new configuration from Panorama to a pair of firewalls that are configured as an active/passive HA pair. Which NGFW receives the configuration from Panorama?

- A. The Passive firewall, which then synchronizes to the active firewall
- B. The active firewall, which then synchronizes to the passive firewall
- C. Both the active and passive firewalls, which then synchronize with each other
- D. Both the active and passive firewalls independently, with no synchronization afterward

Answer: C

NEW QUESTION 8

Refer to the exhibit.

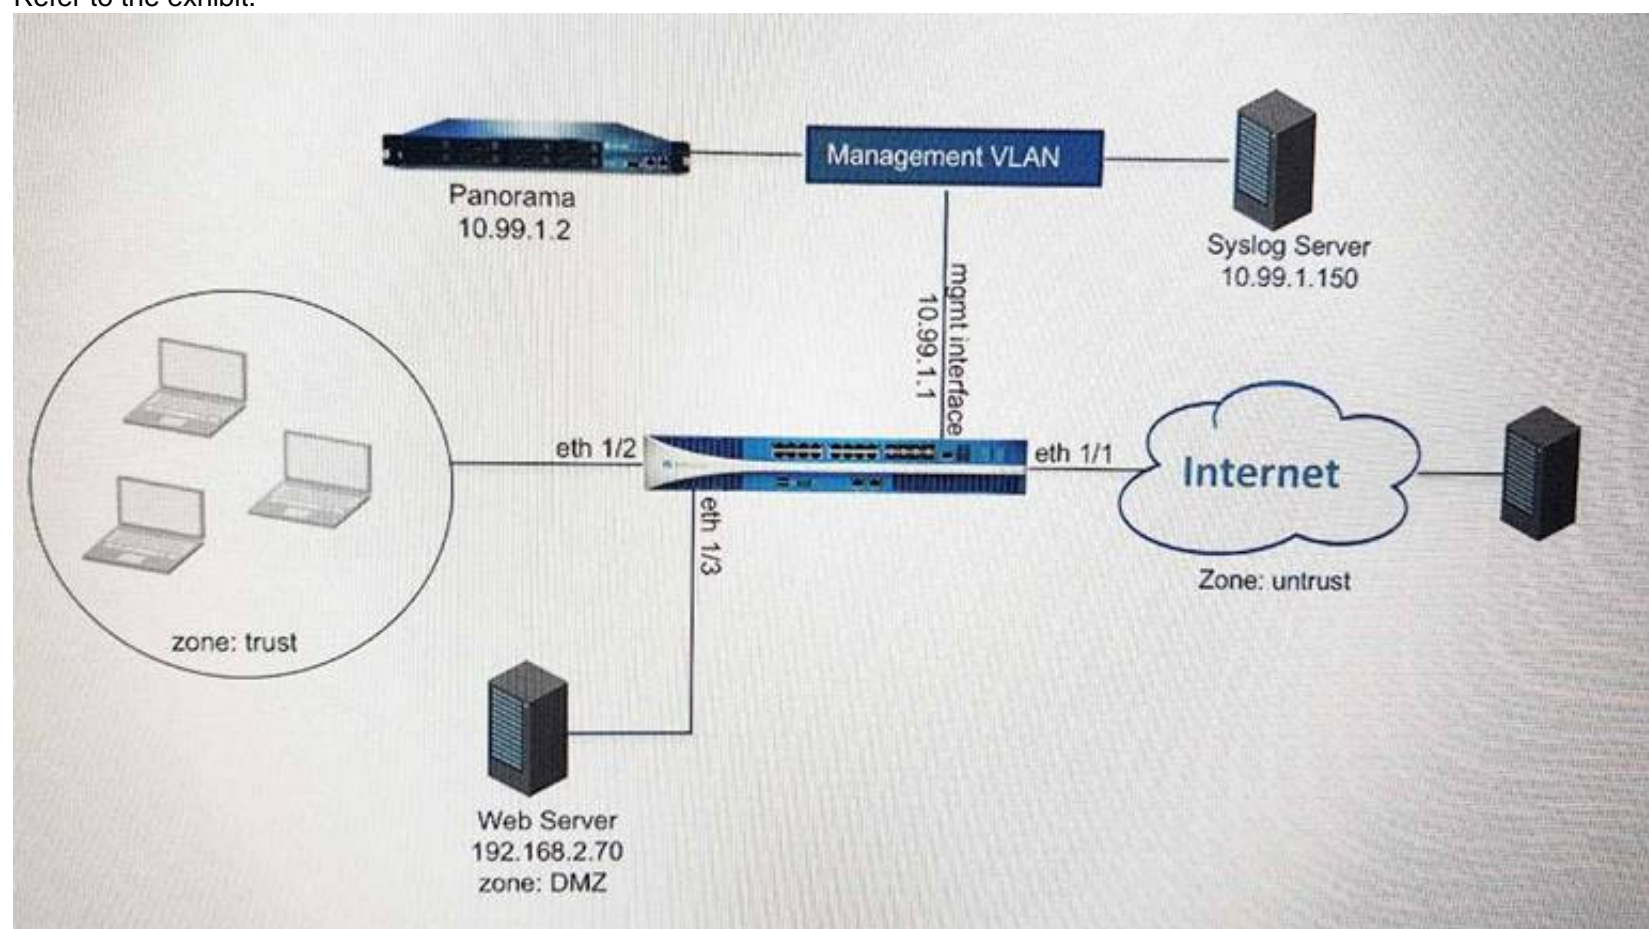

An administrator cannot see any of the Traffic logs from the Palo Alto Networks NGFW on Panorama. The configuration problem seems to be on the firewall side. Where is the best place on the Palo Alto Networks NGFW to check whether the configuration is correct?

A)

Panorama Settings

Panorama Servers

10.99.1.21

Receive Timeout for Connection to Panorama (sec) 240

Send Timeout for Connection to Panorama (sec) 240

Retry Count for SSL Send to Panorama 25

☐ **Secure Client Communication**

Certificate Type None

☐ Check Server Identity

B)

Security Policy Rule

General Source User Destination Application Service/URL Category Actions

Action Setting

Action Allow

☐ Send ICMP Unreachable

Log Setting

☒ Log at Session Start

☒ Log at Session End

Log Forwarding None

Profile Setting

Profile Type Profiles

Antivirus None

Vulnerability Protection None

Anti-Spyware None

URL Filtering Filter1

File Blocking None

Data Filtering None

WildFire Analysis None

Other Settings

Schedule None

QoS Marking None

☐ Disable Server Response Inspection

OK Cancel

C)

Syslog Server Profile

Name SyslogProfile1

Servers Custom Log Format

Name	Syslog Server	Transport	Port	Format	Facility
SyslogServer1	192.168.229.17	UDP	514	BSD	LOG_USER

+ Add - Delete

D)

Panorama Settings

Receive Timeout for Connection to Device (sec) 240

Send Timeout for Connection to Device (sec) 240

Retry Count for SSL Send to Device 25

☒ Share Unused Address and Service Objects with Devices

☐ Objects defined in ancestors will take higher precedence

Secure Server Communication

☐ Custom Certificate Only

SSL/TLS Service Profile None

Certificate Profile None

Authorization List

Identifier	Type	Value
------------	------	-------

☐ Authorize Clients Based on Serial Number

☐ Check Authorization List

Connect Wait Time (min) [0 - 44640]

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: D

NEW QUESTION 9

When configuring a GlobalProtect Portal, what is the purpose of specifying an Authentication Profile?

- A. To enable Gateway authentication to the Portal
- B. To enable Portal authentication to the Gateway
- C. To enable user authentication to the Portal
- D. To enable client machine authentication to the Portal

Answer: C

Explanation:

The additional options of Browser and Satellite enable you to specify the authentication profile to use for specific scenarios. Select Browser to specify the authentication profile to use to authenticate a user accessing the portal from a web browser with the intent of downloading the GlobalProtect agent (Windows and Mac). Select Satellite to specify the authentication profile to use to authenticate the satellite.

Reference <https://www.paloaltonetworks.com/documentation/71/pan-os/web-interface-help/globalprotect/network-globalprotect-portals>

NEW QUESTION 10

If a template stack is assigned to a device and the stack includes three templates with overlapping settings, which settings are published to the device when the template stack is pushed?

- A. The settings assigned to the template that is on top of the stack.
- B. The administrator will be prompted to choose the settings for that chosen firewall.
- C. All the settings configured in all templates.
- D. Depending on the firewall location, Panorama decides which settings to send.

Answer: B

Explanation:

Reference:

https://www.paloaltonetworks.com/documentation/80/panorama/panorama_adminguide/manage-firewalls/manage-templates-and-template-stacks/configure-a-template-stack

NEW QUESTION 10

To connect the Palo Alto Networks firewall to AutoFocus, which setting must be enabled?

- A. Device>Setup>Services>AutoFocus
- B. Device> Setup>Management >AutoFocus
- C. AutoFocus is enabled by default on the Palo Alto Networks NGFW
- D. Device>Setup>WildFire>AutoFocus
- E. Device>Setup> Management> Logging and Reporting Settings

Answer: B

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/71/pan-os/pan-os/getting-started/enable-autofocus-threat-intelligence>

"<https://www.paloaltonetworks.com/documentation/71/pan-os/pan-os/getting-started/enable-autofocus-threat-intelligence>"

NEW QUESTION 11

Which User-ID method maps IP addresses to usernames for users connecting through an 802.1x- enabled wireless network device that has no native integration with PAN-OS® software?

- A. XML API
- B. Port Mapping
- C. Client Probing
- D. Server Monitoring

Answer: A

Explanation:

Captive Portal and the other standard user mapping methods might not work for certain types of user access. For example, the standard methods cannot add mappings of users connecting from a

third-party VPN solution or users connecting to a 802.1x-enabled wireless network. For such cases, you can use the PAN-OS XML API to capture login events and send them to the PAN-OS integrated User-ID agent Reference: <https://www.paloaltonetworks.com/documentation/71/pan-os/pan-os/user-id/user-id-concepts>

NEW QUESTION 12

Decrypted packets from the website <https://www.microsoft.com> will appear as which application and service within the Traffic log?

- A. web-browsing and 443
- B. SSL and 80
- C. SSL and 443
- D. web-browsing and 80

Answer: A

NEW QUESTION 17

Which PAN-OS® policy must you configure to force a user to provide additional credentials before he is allowed to access an internal application that contains highly-sensitive business data?

- A. Security policy
- B. Decryption policy
- C. Authentication policy
- D. Application Override policy

Answer: C

NEW QUESTION 18

A Security policy rule is configured with a Vulnerability Protection Profile and an action of ‘Deny’. Which action will this cause configuration on the matched traffic?

- A. The configuration is invalid
- B. The Profile Settings section will be grayed out when the Action is set to “Deny”.
- C. The configuration will allow the matched session unless a vulnerability signature is detected
- D. The “Deny” action will supersede the per-severity defined actions defined in the associated Vulnerability Protection Profile.
- E. The configuration is invalid
- F. It will cause the firewall to skip this Security policy rule
- G. A warning will be displayed during a commit.
- H. The configuration is valid
- I. It will cause the firewall to deny the matched session
- J. Any configured Security Profiles have no effect if the Security policy rule action is set to “Deny.”

Answer: B

NEW QUESTION 21

What are two benefits of nested device groups in Panorama? (Choose two.)

- A. Reuse of the existing Security policy rules and objects
- B. Requires configuring both function and location for every device
- C. All device groups inherit settings from the Shared group
- D. Overwrites local firewall configuration

Answer: BC

NEW QUESTION 23

An administrator needs to implement an NGFW between their DMZ and Core network. EIGRP Routing between the two environments is required. Which interface type would support this business requirement?

- A. Virtual Wire interfaces to permit EIGRP routing to remain between the Core and DMZ
- B. Layer 3 or Aggregate Ethernet interfaces, but configuring EIGRP on subinterfaces only
- C. Tunnel interfaces to terminate EIGRP routing on an IPsec tunnel (with the GlobalProtect License to support LSVPN and EIGRP protocols)
- D. Layer 3 interfaces, but configuring EIGRP on the attached virtual router

Answer: C

NEW QUESTION 28

A speed/duplex negotiation mismatch is between the Palo Alto Networks management port and the switch port which it connects. How would an administrator configure the interface to 1Gbps?

- A. set deviceconfig interface speed-duplex 1Gbps-full-duplex
- B. set deviceconfig system speed-duplex 1Gbps-duplex
- C. set deviceconfig system speed-duplex 1Gbps-full-duplex
- D. set deviceconfig Interface speed-duplex 1Gbps-half-duplex

Answer: B

Explanation:

Reference: <https://live.paloaltonetworks.com/t5/Configuration-Articles/How-to-Change-the-Speed-and-Duplex-of-the-Management-Port/ta-p/59034>

NEW QUESTION 33

A web server is hosted in the DMZ, and the server is configured to listen for incoming connections only on TCP port 8080. A Security policy rule allowing access from the Trust zone to the DMZ zone need to be configured to enable web browsing access to the server.


Which application and service need to be configured to allow only cleartext web-browsing traffic to this server on tcp/8080.

- A. application: web-browsing; service: application-default
- B. application: web-browsing; service: service-https
- C. application: ssl; service: any
- D. application: web-browsing; service: (custom with destination TCP port 8080)

Answer: A

NEW QUESTION 36

If the firewall has the link monitoring configuration, what will cause a failover?

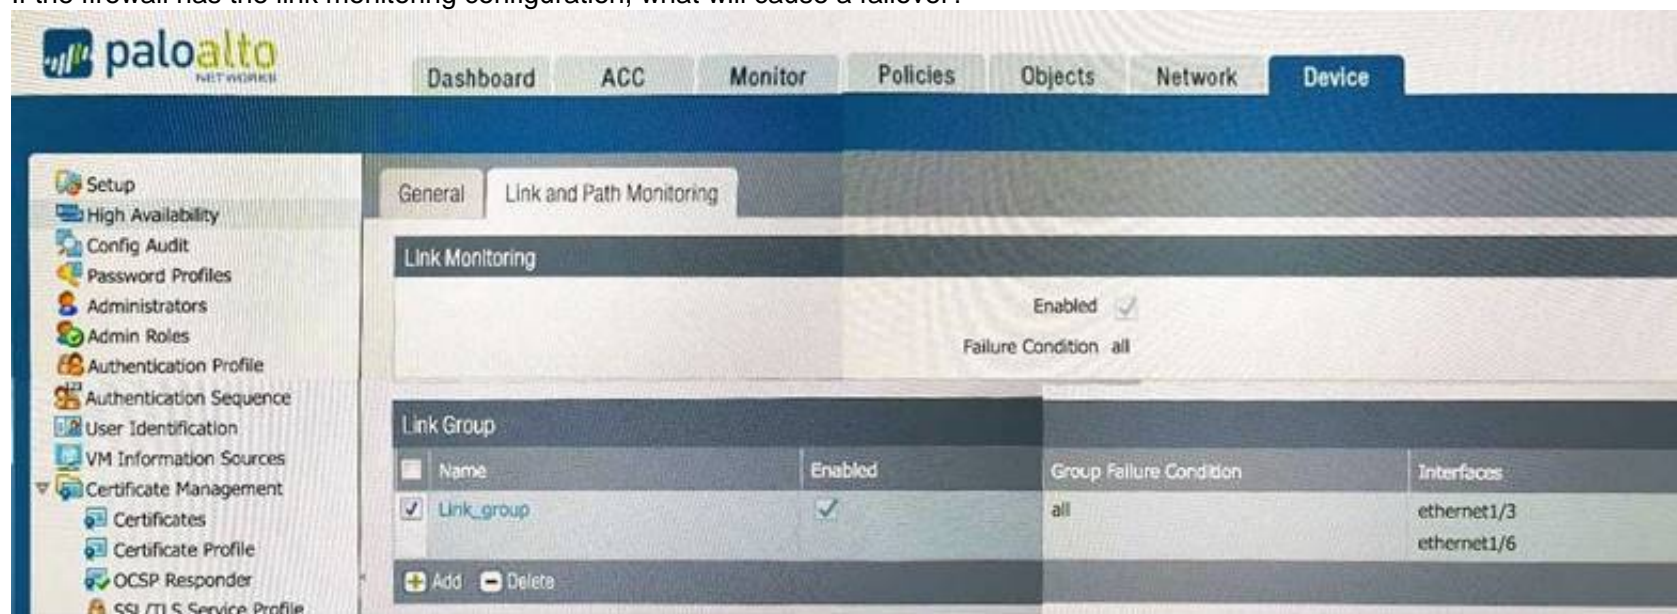

- A. ethernet1/3 and ethernet1/6 going down
- B. ethernet1/3 going down
- C. ethernet1/3 or Ethernet1/6 going down
- D. ethernet1/6 going down

Answer: A

NEW QUESTION 39

How would an administrator monitor/capture traffic on the management interface of the Palo Alto Networks NGFW?

- A. Use the debug dataplane packet-diag set capture stage firewall file command.
- B. Enable all four stages of traffic capture (TX, RX, DROP, Firewall).

- C. Use the debug dataplane packet-diag set capture stage management file command.
D. Use the tcpdump command.

Answer: D


Explanation:

Reference: <https://live.paloaltonetworks.com/t5/Learning-Articles/How-to-Run-a-Packet-Capture/ta-p/62390>


NEW QUESTION 41

An administrator needs to determine why users on the trust zone cannot reach certain websites. The only information available is shown on the following image.


A)

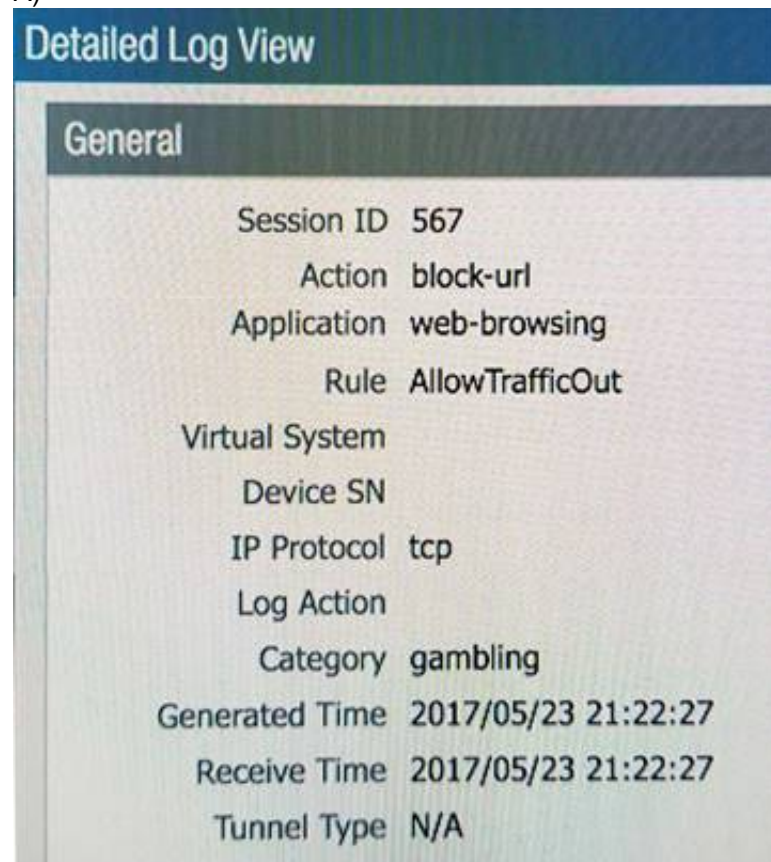


B)

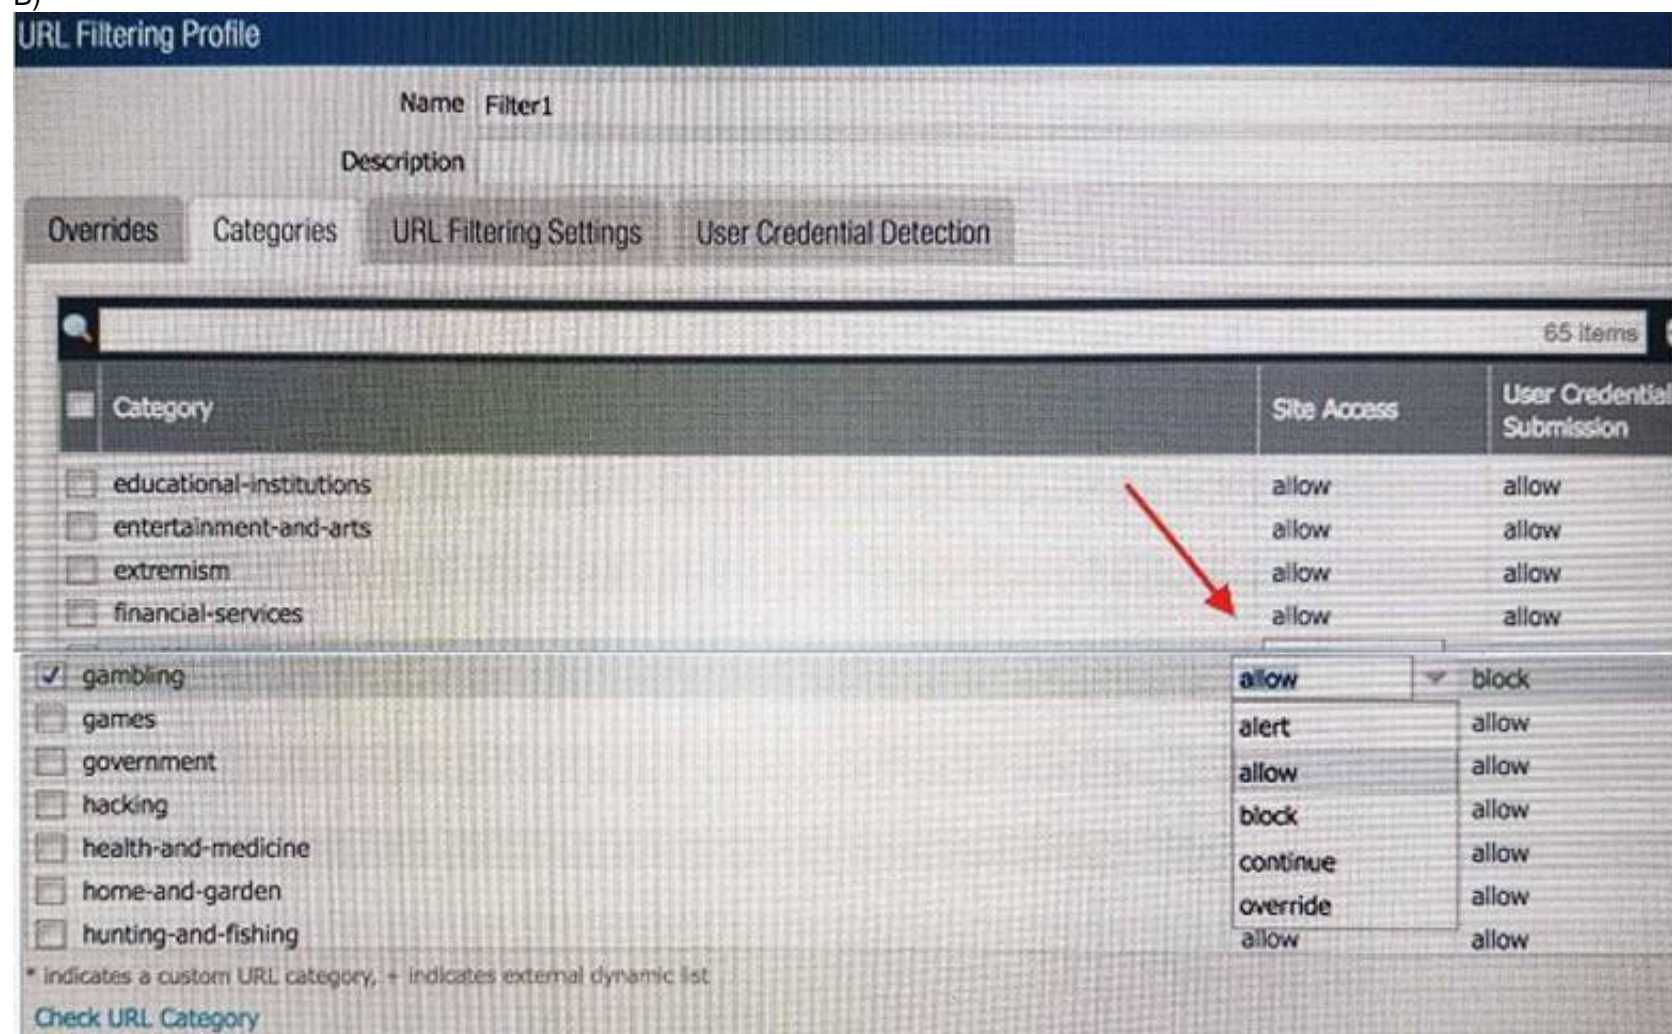


C)

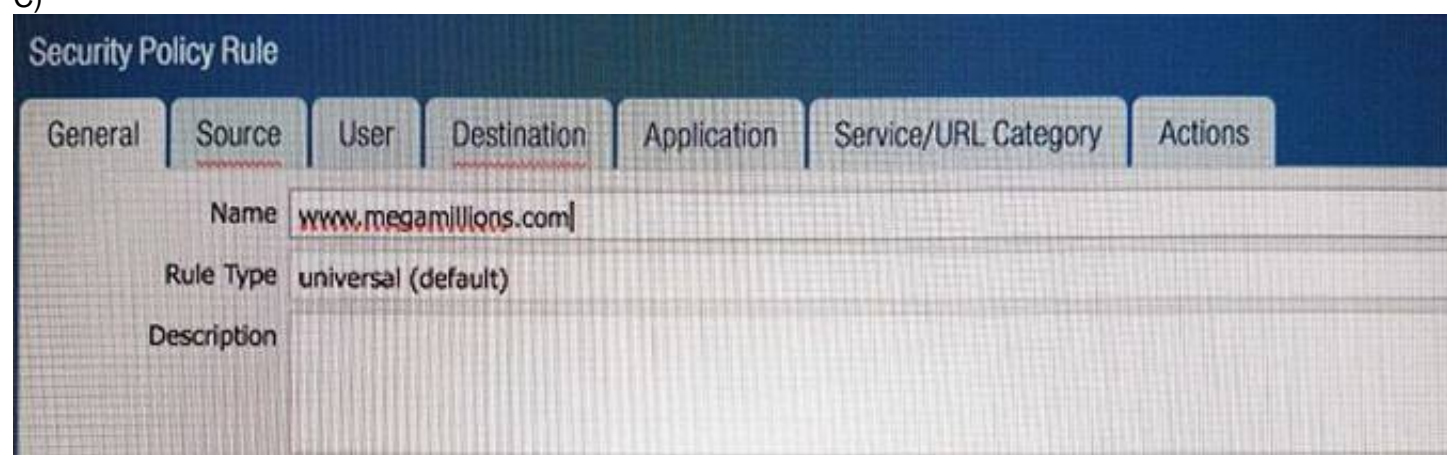

D)

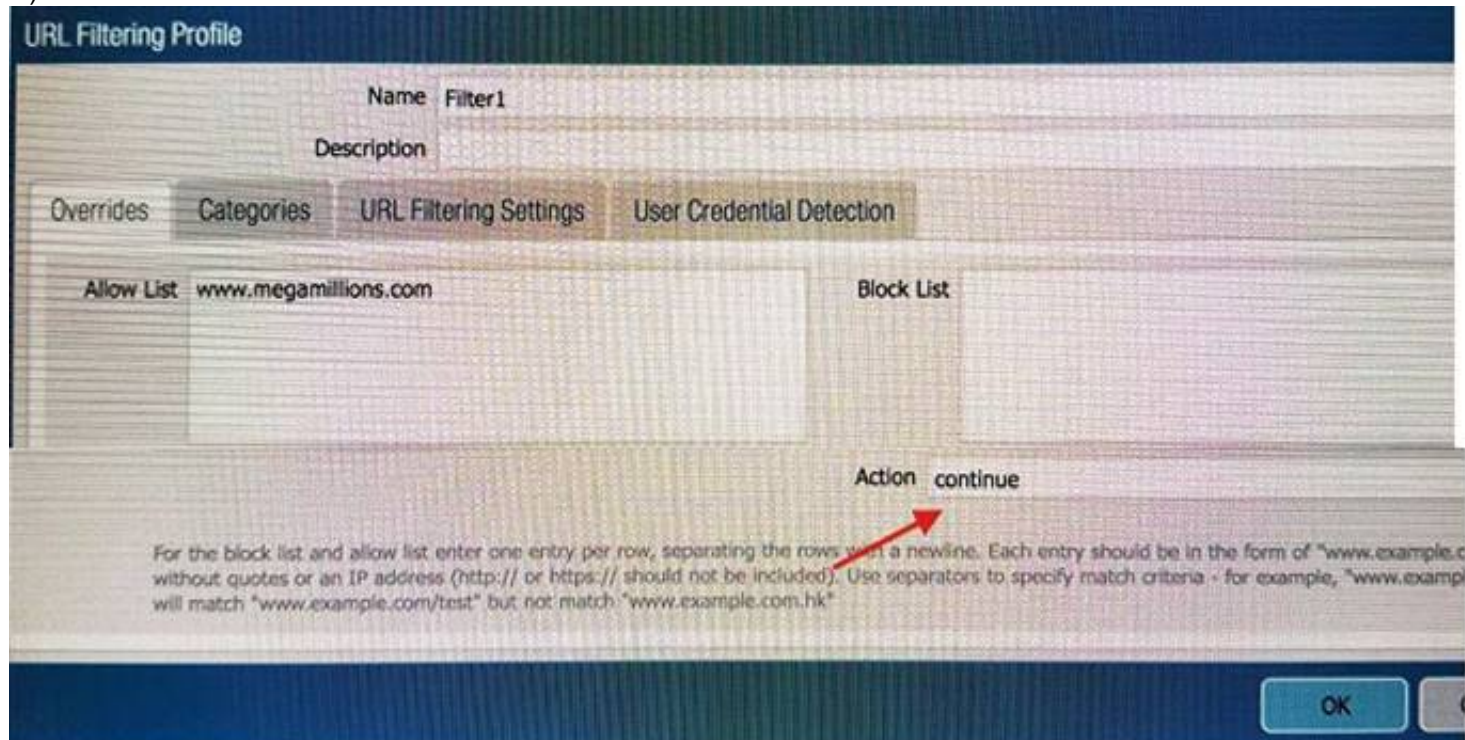

E)

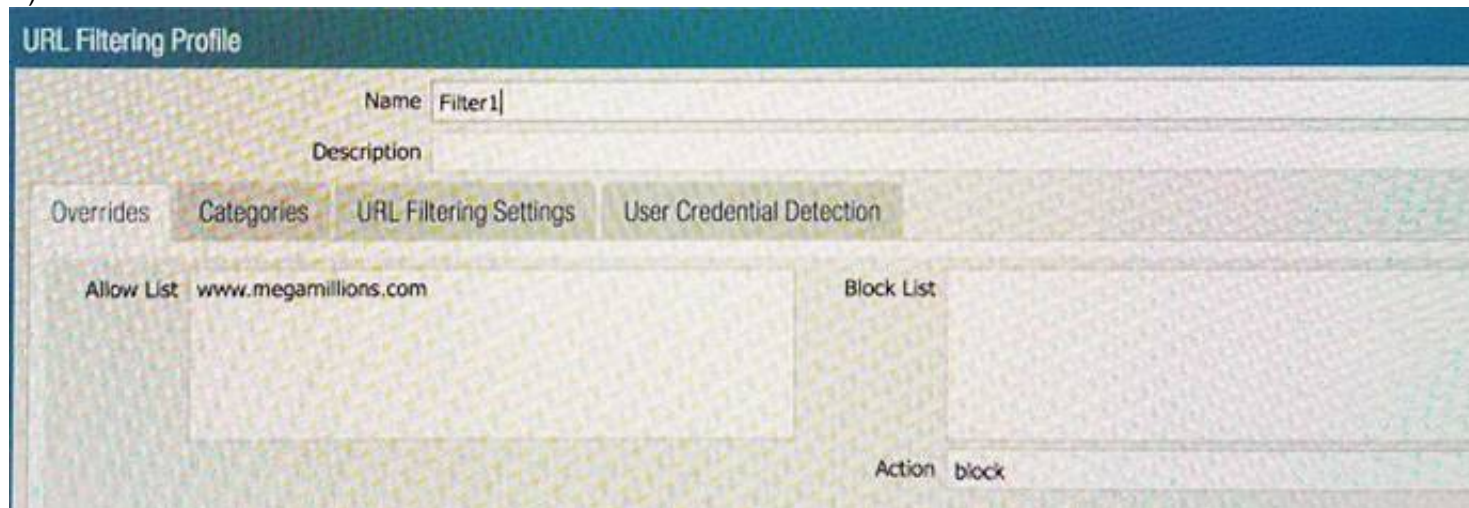

- A. Option A
- B. Option B
- C. Option C
- D. Option D
- E. Option E

Answer: B

NEW QUESTION 42

VPN traffic intended for an administrator's Palo Alto Networks NGFW is being maliciously intercepted and retransmitted by the interceptor. When creating a VPN tunnel, which protection profile can be enabled to prevent this malicious behavior?

- A. Zone Protection
- B. DoS Protection
- C. Web Application
- D. Replay

Answer: A

NEW QUESTION 44

An administrator creates a custom application containing Layer 7 signatures. The latest application and threat dynamic update is downloaded to the same NGFW. The update contains an application that matches the same traffic signatures as the custom application. Which application should be used to identify traffic traversing the NGFW?

- A. Custom application
- B. System logs show an application error and neither signature is used.
- C. Downloaded application
- D. Custom and downloaded application signature files are merged and both are used

Answer: A

NEW QUESTION 48

Which three file types can be forwarded to WildFire for analysis as a part of the basic WildFire service? (Choose three.)

- A. dll
- B. exe
- C. src
- D. apk
- E. pdf

F. jar

Answer: DEF

Explanation:

Reference: https://www.paloaltonetworks.com/documentation/80/wildfire/wf_admin/wildfire-overview/wildfire-file-type-support

NEW QUESTION 51

Which event will happen if an administrator uses an Application Override Policy?

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Reference: <https://live.paloaltonetworks.com/t5/Learning-Articles/Tips-and-Tricks-How-to-Create-an-Application-Override/ta-p/65513>

NEW QUESTION 53

Which Security policy rule will allow an admin to block facebook chat but allow Facebook in general?

- A. Deny application facebook-chat before allowing application facebook
- B. Deny application facebook on top
- C. Allow application facebook on top
- D. Allow application facebook before denying application facebook-chat

Answer: A

Explanation:

Reference: <https://live.paloaltonetworks.com/t5/Configuration-Articles/Failed-to-Block-Facebook-Chat-Consistently/ta-p/115673>

NEW QUESTION 57

An administrator needs to upgrade a Palo Alto Networks NGFW to the most current version of PAN- OS® software. The firewall has internet connectivity through an Ethernet interface, but no internet connectivity from the management interface. The Security policy has the default security rules and a rule that allows all web-browsing traffic from any to any zone. What must the administrator configure so that the PAN-OS® software can be upgraded?

- A. Security policy rule
- B. CRL
- C. Service route
- D. Scheduler

Answer: A

NEW QUESTION 61

Which feature prevents the submission of corporate login information into website forms?

- A. Data filtering
- B. User-ID
- C. File blocking
- D. Credential phishing prevention

Answer: D

Explanation:

Reference: <https://www.paloaltonetworks.com/cyberpedia/how-the-next-generation-security-platform-contributes-to-gdpr-compliance>

NEW QUESTION 66

In a virtual router, which object contains all potential routes?

- A. MIB
- B. RIB
- C. SIP
- D. FIB

Answer: B

Explanation:

Reference: https://www.google.com/url?sa=t&rct=j&q=&esrc=s&source=web&cd=10&ved=0ahUKEwiOkbfYzPzXAhVnEJoKHcwVCg4QFghiMAk&url=https%3A%2F%2Flive.paloaltonetworks.com%2Ftwzvq79624%2Fattachments%2Ftwzvq79624%2Fdocumentation_tkb%2F487%2F1%2FRoute%2520Redistribution%2520and%2520Filtering%2520TechNote%2520-%2520Rev%2520B.pdf&usg=AOvVaw0H9qgaJK0oI2xjIJBNo1Km

NEW QUESTION 67

An administrator creates an SSL decryption rule decrypting traffic on all ports. The administrator also creates a Security policy rule allowing only the applications DNS, SSL, and web-browsing.

The administrator generates three encrypted BitTorrent connections and checks the Traffic logs. There are three entries. The first entry shows traffic dropped as application Unknown. The next two entries show traffic allowed as application SSL.

Which action will stop the second and subsequent encrypted BitTorrent connections from being allowed as SSL?

- A. Create a decryption rule matching the encrypted BitTorrent traffic with action “No-Decrypt,” and place the rule at the top of the Decryption policy.
- B. Create a Security policy rule that matches application “encrypted BitTorrent” and place the rule at the top of the Security policy.
- C. Disable the exclude cache option for the firewall.
- D. Create a Decryption Profile to block traffic using unsupported cyphers, and attach the profile to the decryption rule.

Answer: D

NEW QUESTION 69

Which protection feature is available only in a Zone Protection Profile?

- A. SYN Flood Protection using SYN Flood Cookies
- B. ICMP Flood Protection
- C. Port Scan Protection
- D. UDP Flood Protections

Answer: A

NEW QUESTION 70

Which CLI command enables an administrator to view details about the firewall including uptime, PAN-OS® version, and serial number?

- A. debug system details
- B. show session info
- C. show system info
- D. show system details

Answer: C

Explanation:

Reference: https://www.paloaltonetworks.com/content/dam/pan/en_US/assets/pdf/technical-documentation/pan-os-60/PAN-OS-6.0-CLI-ref.pdf

NEW QUESTION 73

Which tool provides an administrator the ability to see trends in traffic over periods of time, such as threats detected in the last 30 days?

- A. Session Browser
- B. Application Command Center
- C. TCP Dump
- D. Packet Capture

Answer: B

Explanation:

Reference: <https://live.paloaltonetworks.com/t5/Management-Articles/Tips-and-Tricks-How-to-Use-the-Application-Command-Center-ACC/ta-p/67342>

NEW QUESTION 74

Which three steps will reduce the CPU utilization on the management plane? (Choose three.)

- A. Disable SNMP on the management interface.
- B. Application override of SSL application.
- C. Disable logging at session start in Security policies.
- D. Disable predefined reports.
- E. Reduce the traffic being decrypted by the firewall.

Answer: CDE

NEW QUESTION 75

Which feature must you configure to prevent users from accidentally submitting their corporate credentials to a phishing website?

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/80/pan-os/pan-os/threat-prevention/prevent-credential-phishing>

NEW QUESTION 78

How can a candidate or running configuration be copied to a host external from Panorama?

- A. Commit a running configuration.
- B. Save a configuration snapshot.
- C. Save a candidate configuration.
- D. Export a named configuration snapshot.

Answer: D

Explanation:

Reference:

https://www.paloaltonetworks.com/documentation/71/panorama/panorama_adminguide/administer-panorama/back-up-panorama-and-firewall-configurations

NEW QUESTION 82

An administrator sees several inbound sessions identified as unknown-tcp in the Traffic logs. The administrator determines that these sessions are from external users accessing the company's proprietary accounting application. The administrator wants to reliably identify this traffic as their accounting application and to scan this traffic for threats.

Which option would achieve this result?

- A. Create a custom App-ID and enable scanning on the advanced tab.
- B. Create an Application Override policy.
- C. Create a custom App-ID and use the "ordered conditions" check box.
- D. Create an Application Override policy and custom threat signature for the application.

Answer: A

NEW QUESTION 86

Which three firewall states are valid? (Choose three.)

- A. Active
- B. Functional
- C. Pending
- D. Passive
- E. Suspended

Answer: ADE

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/71/pan-os/pan-os/high-availability/ha-firewall-states>

NEW QUESTION 87

An administrator has a requirement to export decrypted traffic from the Palo Alto Networks NGFW to a third-party, deep-level packet inspection appliance.

Which interface type and license feature are necessary to meet the requirement?

- A. Decryption Mirror interface with the Threat Analysis license
- B. Virtual Wire interface with the Decryption Port Export license
- C. Tap interface with the Decryption Port Mirror license
- D. Decryption Mirror interface with the associated Decryption Port Mirror license

Answer: D

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/71/pan-os/pan-os/decryption/decryption-mirroring>

NEW QUESTION 88

When is the content inspection performed in the packet flow process?

- A. after the application has been identified
- B. before session lookup
- C. before the packet forwarding process
- D. after the SSL Proxy re-encrypts the packet

Answer: A

Explanation:

Reference:

<https://live.paloaltonetworks.com/t5/Learning-Articles/Packet-Flow-Sequence-in-PAN-OS/ta-p/56081>

NEW QUESTION 90

An administrator has been asked to configure a Palo Alto Networks NGFW to provide protection against external hosts attempting to exploit a flaw in an operating system on an internal system. Which Security Profile type will prevent this attack?

- A. Vulnerability Protection
- B. Anti-Spyware
- C. URL Filtering
- D. Antivirus

Answer: A

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/71/pan-os/web-interface-help/objects/objects-security-profiles-vulnerability-protection>

NEW QUESTION 91

Which processing order will be enabled when a Panorama administrator selects the setting "Objects defined in ancestors will take higher precedence?"

- A. Descendant objects will take precedence over other descendant objects.
- B. Descendant objects will take precedence over ancestor objects.
- C. Ancestor objects will have precedence over descendant objects.
- D. Ancestor objects will have precedence over other ancestor objects.

Answer: C

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/71/pan-os/web-interface-help/device/device-setup-management>

NEW QUESTION 95

An administrator using an enterprise PKI needs to establish a unique chain of trust to ensure mutual authentication between Panorama and the managed firewalls and Log Collectors.

How would the administrator establish the chain of trust?

- A. Use custom certificates
- B. Enable LDAP or RADIUS integration
- C. Set up multi-factor authentication
- D. Configure strong password authentication

Answer: A

Explanation:

Reference:

https://www.paloaltonetworks.com/documentation/80/panorama/panorama_adminguide/panorama-overview/plan-your-panorama-deployment

NEW QUESTION 98

Exhibit:

```
#####
```

```
admin@Lab33-111-PA-3060(active)>show routing fib
```

id	destination	nexthop	flags	interface	mtu
47	0.0.0.0/0	10.46.40.1	ug	ethernet1/3	1500
46	10.46.40.0/23	0.0.0.0	u	ethernet1/3	1500
45	10.46.41.111/32	0.0.0.0	uh	ethernet1/3	1500
70	10.46.41.113/32	10.46.40.1	ug	ethernet1/3	1500
51	192.168.111.0/24	0.0.0.0	u	ethernet1/6	1500
50	192.168.111.2/32	0.0.0.0	uh	ethernet1/6	1500

```
#####
```

```
admin@Lab33-111-PA-3060(active)>show virtual-wire all
```

```
total virtual-wire shown:
```

```
flags: m-multicast firewalling
       p= link state pass-through
       s- vlan sub-interface
       i- ip+vlan sub-interface
       t-tenant sub-interface
```

name	interface1	interface2	flags	allowed-tags
VW-1	ethernet1/7	ethernet1/5	p	

```
#####
```

What will be the egress interface if the traffic's ingress interface is ethernet1/6 sourcing from 192.168.111.3 and to the destination 10.46.41.113 during the time shown in the image?

- A. ethernet1/7
- B. ethernet1/5
- C. ethernet1/6
- D. ethernet1/3

Answer: D

NEW QUESTION 102

Which two options prevent the firewall from capturing traffic passing through it? (Choose two.)

- A. The firewall is in multi-vsyt mode.

- B. The traffic is offloaded.
- C. The traffic does not match the packet capture filter.
- D. The firewall's DP CPU is higher than 50%.

Answer: BC

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/80/pan-os/pan-os/monitoring/take-packet-captures/disable-hardware-offload>

NEW QUESTION 103

Which two benefits come from assigning a Decryption Profile to a Decryption policy rule with a "No Decrypt" action? (Choose two.)

- A. Block sessions with expired certificates
- B. Block sessions with client authentication
- C. Block sessions with unsupported cipher suites
- D. Block sessions with untrusted issuers
- E. Block credential phishing

Answer: ABC

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/71/pan-os/pan-os/decryption/create-a-decryption-profile>

NEW QUESTION 105

Which feature can be configured on VM-Series firewalls?

- A. aggregate interfaces
- B. machine learning
- C. multiple virtual systems
- D. GlobalProtect

Answer: D

NEW QUESTION 106

In High Availability, which information is transferred via the HA data link?

- A. session information
- B. heartbeats
- C. HA state information
- D. User-ID information

Answer: A

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/71/pan-os/pan-os/high-availability/ha-links-and-backup-links>

NEW QUESTION 107

Which CLI command enables an administrator to check the CPU utilization of the dataplane?

- A. show running resource-monitor
- B. debug data-plane dp-cpu
- C. show system resources
- D. debug running resources

Answer: A

NEW QUESTION 108

Which two subscriptions are available when configuring panorama to push dynamic updates to connected devices? (Choose two.)

- A. Content-ID
- B. User-ID
- C. Applications and Threats
- D. Antivirus


Answer: CD

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/71/pan-os/web-interface-help/device/device-dynamic-updates>

NEW QUESTION 113

View the GlobalProtect configuration screen capture.

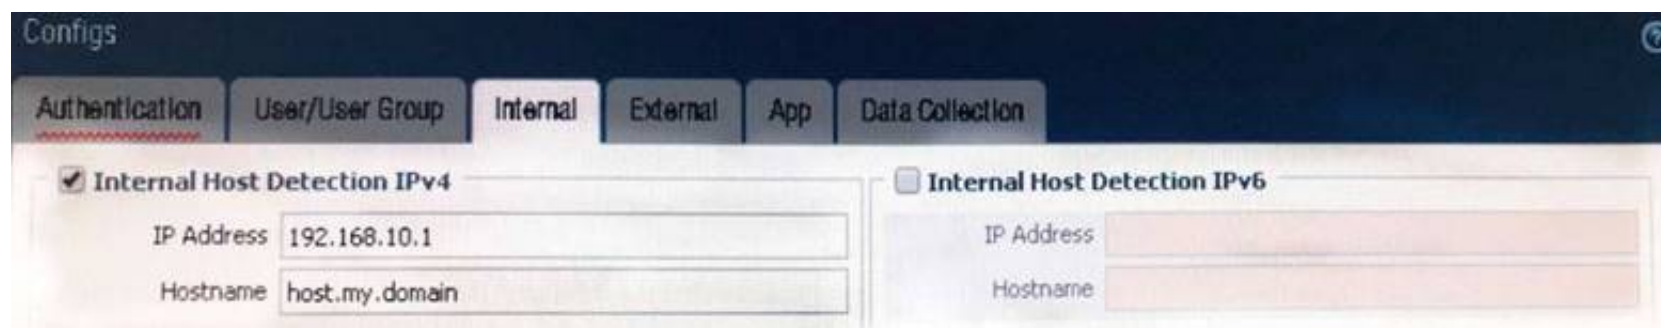

What is the purpose of this configuration?

- A. It configures the tunnel address of all internal clients to an IP address range starting at 192.168.10.1.
- B. It forces an internal client to connect to an internal gateway at IP address 192.168.10.1.
- C. It enables a client to perform a reverse DNS lookup on 192.168.10.1 to detect that it is an internal client.
- D. It forces the firewall to perform a dynamic DNS update, which adds the internal gateway's hostname and IP address to the DNS server.

Answer: C

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/80/globalprotect/globalprotect-admin-guide/globalprotect-portals/define-the-globalprotect-client-authentication-configurations/define-the-globalprotect-agent-configurations>

NEW QUESTION 117

Which three user authentication services can be modified to provide the Palo Alto Networks NGFW with both usernames and role names? (Choose three.)

- A. TACACS+
- B. Kerberos
- C. PAP
- D. LDAP
- E. SAML
- F. RADIUS

Answer: ADF

NEW QUESTION 120

Which prerequisite must be satisfied before creating an SSH proxy Decryption policy?

- A. Both SSH keys and SSL certificates must be generated.
- B. No prerequisites are required.
- C. SSH keys must be manually generated.
- D. SSL certificates must be generated.

Answer: B

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/71/pan-os/pan-os/decryption/configure-ssh-proxy>

NEW QUESTION 122

A customer wants to combine multiple Ethernet interfaces into a single virtual interface using link aggregation. Which two formats are correct for naming aggregate interfaces? (Choose two.)

- A. ae.8
- B. aggregate.1
- C. ae.1
- D. aggregate.8

Answer: AC

NEW QUESTION 123

Which three authentication factors does PAN-OS® software support for MFA (Choose three.)

- A. Push
- B. Pull
- C. Okta Adaptive
- D. Voice E.SMS

Answer: ADE

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/80/pan-os/pan-os/authentication/configure-multi-factor-authentication>

NEW QUESTION 128

For which two reasons would a firewall discard a packet as part of the packet flow sequence? (Choose two)

- A. equal-cost multipath
- B. ingress processing errors
- C. rule match with action "allow"

D. rule match with action "deny"

Answer: BD

NEW QUESTION 129

A company wants to install a PA-3060 firewall between two core switches on a VLAN trunk link. They need to assign each VLAN to its own zone and to assign untagged (native) traffic to its own zone which options differentiates multiple VLAN into separate zones?

- A. Create VLAN objects for each VLAN and assign VLAN interfaces matching each VLAN I
- B. Repeat foreverly additional VLANand use a VLAN ID of 0 for untagged traffi
- C. Assign each interface/subinterface to a unique zone.
- D. Create V-Wire objects with two V-Wire sub interface and assign only a single VLAN ID to the "Tag Allowed field one of the V-Wire object Repeat for every additional VLAN and use a VIAN ID of 0 for untagged traffi
- E. Assign each interface/subinterfaceto a unique zone.
- F. Create V-Wire objects with two V-Wire interfaces and define a range "0- 4096" in the "Tag Allowed filed of the V-Wire object.
- G. Create Layer 3 sub interfaces that are each assigned to a single VLAN ID and a common virtual route
- H. The physical Layer 3interface would handle untagged traffi
- I. Assign each interface /subinterface to a unique zon
- J. Do not assign any interface anIP address

Answer: C

NEW QUESTION 133

Which data flow describes redistribution of user mappings?

- A. User-ID agent to firewall
- B. firewall to firewall
- C. Domain Controller to User-ID agent
- D. User-ID agent to Panorama

Answer: B

NEW QUESTION 138

Which four NGFW multi-factor authentication factors are supported by PAN-OSS? (Choose four.)

- A. User logon
- B. Short message service
- C. Push
- D. SSH keyE.One-Time Password F.Voice

Answer: BCEF

NEW QUESTION 141

Which log file can be used to identify SSL decryption failures?

- A. Configuration
- B. Threats
- C. ACC
- D. Traffic

Answer: C

NEW QUESTION 146

An administrator needs to upgrade an NGFW to the most current version of PAN-OS® software. The following is occurring:

- Firewall has Internet connectivity through e1/1.
- Default security rules and security rules allowing all SSL and web-browsing traffic to and from any zone.
- Service route is configured, sourcing update traffic from e1/1.
- A communication error appears in the System logs when updates are performed.
- Download does not complete.

What must be configured to enable the firewall to download the current version of PAN-OS software?

- A. DNS settings for the firewall to use for resolution
- B. scheduler for timed downloads of PAN-OS software
- C. static route pointing application PaloAlto-updates to the update servers
- D. Security policy rule allowing PaloAlto-updates as the application

Answer: D

NEW QUESTION 149

An administrator wants a new Palo Alto Networks NGFW to obtain automatic application updates daily, so it is configured to use a scheduler for the application database. Unfortunately, they required the management network to be isolated so that it cannot reach the internet. Which configuration will enable the firewall to download and install application updates automatically?

- A. Configure a Policy Based Forwarding policy rule for the update server IP address so that traffic sourced from themanagement interfaced destined for the update servers goes out of the interface acting as your internet connection.
- B. Configure a security policy rule to allow all traffic to and from the update servers.
- C. Download and install application updates cannot be done automatically if the MGT port cannot reach the internet.

D. Configure a service route for Palo Alto networks services that uses a dataplane interface that can route traffic to the internet, and create a security policy rule to allow the traffic from that interface to the update servers if necessary.

Answer: B

NEW QUESTION 150

Which three firewall states are valid? (Choose three)

- A. Suspended
- B. Passive
- C. Active
- D. Pending E.Functional

Answer: ABC

NEW QUESTION 154

Which is the maximum number of samples that can be submitted to WildFire per day, based on wildfire subscription?

- A. 15,000
- B. 10,000
- C. 75,00
- D. 5,000

Answer: B

NEW QUESTION 158

An administrator has configured a QoS policy rule and a QoS profile that limits the maximum allowable bandwidth for the YouTube application. However , YouTube is consuming more than the maximum bandwidth allotment configured.

Which configuration step needs to be configured to enable QoS?

- A. Enable QoS Data Filtering Profile
- B. Enable QoS monitor
- C. Enable Qos interface
- D. Enable Qos in the interface Management Profile.

Answer: C

NEW QUESTION 163

When configuring the firewall for packet capture, what are the valid stage types?

- A. Receive, management , transmit , and drop
- B. Receive , firewall, send , and non-syn
- C. Receive management , transmit, and non-syn
- D. Receive , firewall, transmit, and drop

Answer: D

NEW QUESTION 168

Which feature can provide NGFWs with User-ID mapping information?

- A. GlobalProtect
- B. Web Captcha
- C. Native 802.1q authentication
- D. Native 802.1x authentication

Answer: A

NEW QUESTION 169

Which GlobalProtect Client connect method requires the distribution and use of machine certificates?

- A. User-logon (Always on)
- B. At-boot
- C. On-demand
- D. Pre-logon

Answer: D

NEW QUESTION 174

Where can an administrator see both the management plane and data plane CPU utilization in the WebUI?

- A. System log
- B. CPU Utilization widget
- C. Resources widget
- D. System Utilization log

Answer: C

NEW QUESTION 175

Which option enables a Palo Alto Networks NGFW administrator to schedule Application and Threat updates while applying only new content-IDs to traffic?

- A. Select download-and-install.
- B. Select download-and-install, with "Disable new apps in content update" selected.
- C. Select download-only.
- D. Select disable application updates and select "Install only Threat updates"

Answer: C

NEW QUESTION 180


Which two settings can be configured only locally on the firewall and not pushed from a Panorama template or template stack? (Choose two)

- A. HA1 IP Address
- B. Network Interface Type
- C. Master Key
- D. Zone Protection Profile

Answer: AB

NEW QUESTION 185

Based on the following image,

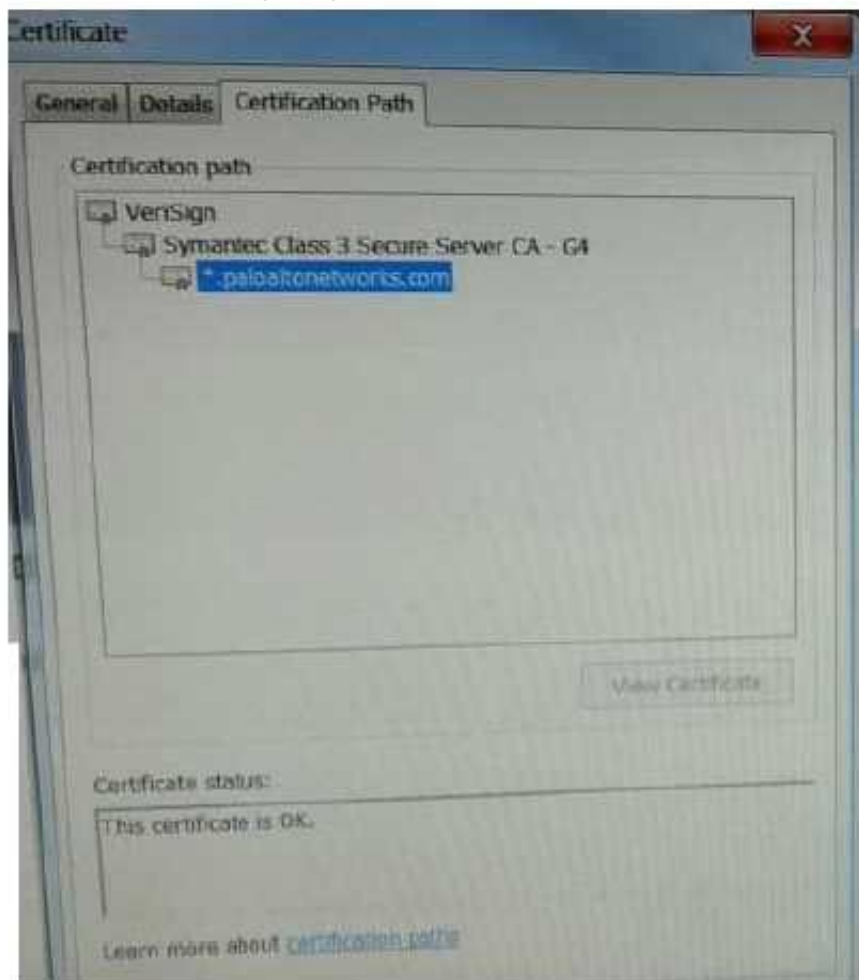

what is the correct path of root, intermediate, and end-user certificate?

- A. Palo Alto Networks > Symantec > VeriSign
- B. Symantec > VeriSign > Palo Alto Networks
- C. VeriSign > Palo Alto Networks > Symantec
- D. VeriSign > Symantec > Palo Alto Networks

Answer: D

NEW QUESTION 188

Which Zone Pair and Rule Type will allow a successful connection for a user on the internet zone to a web server hosted in the DMZ zone? The web server is reachable using a destination Nat policy in the Palo Alto Networks firewall.

- A. Zone Pair:Source Zone: Internet Destination Zone: DMZ Rule Type:"intrazone"
- B. Zone Pair:Source Zone: Internet Destination Zone: DMZ Rule Type:"intrazone" or "universal"
- C. Zone Pair:Source Zone: Internet Destination Zone: Internet Rule Type:"intrazone" or "universal"
- D. Zone Pair:Source Zone: Internet Destination Zone: Internet Rule Type:"intrazone"

Answer: B

NEW QUESTION 193

A host attached to Ethernet 1/4 cannot ping the default gateway. The widget on the dashboard shows Ethernet 1/1 and Ethernet 1/4 to be green. The IP address of Ethernet 1/1 is 192.168.1.7 and the IP address of Ethernet 1/4 is 10.1.1.7. The default gateway is attached to Ethernet 1/1. A default route is properly configured. What can be the cause of this problem?

- A. No Zone has been configured on Ethernet 1/4.
- B. Interface Ethernet 1/1 is in Virtual Wire Mode.
- C. DNS has not been properly configured on the firewall.
- D. DNS has not been properly configured on the host.

Answer: A

NEW QUESTION 194

Site-A and Site-B have a site-to-site VPN set up between them. OSPF is configured to dynamically create the routes between the sites. The OSPF configuration in Site-A is configured properly, but the route for the tunnel is not being established. The Site-B interfaces in the graphic are using a broadcast Link Type. The administrator has determined that the OSPF configuration in Site-B is using the wrong Link Type for one of its interfaces.

Virtual Router - OSPF - Area						
Area ID		0.0.0.0				
Type	Range	Interface		Virtual Link		
<input type="checkbox"/>	Interface	Enable	Passive	Link Type	Metric	Priority
<input type="checkbox"/>	tunnel.10	<input checked="" type="checkbox"/>	<input type="checkbox"/>	broadcast	10	1
<input type="checkbox"/>	ethernet1/21	<input checked="" type="checkbox"/>	<input type="checkbox"/>	broadcast	10	1

Which Link Type setting will correct the error?

- A. Set tunnel to p2p
- B. Set tunnel to p2mp
- C. Set Ethernet 1/1 to p2p
- D. Set Ethernet 1/1 to p2mp
- E. Set Ethernet 1/1 to p2p
- F. Set Ethernet 1/1 to p2mp

Answer: A

NEW QUESTION 196

A VPN connection is set up between Site-A and Site-B, but no traffic is passing in the system log of Site-A, there is an event logged as like-nego-p1-fail-psk. What action will bring the VPN up and allow traffic to start passing between the sites?

- A. Change the Site-B IKE Gateway profile version to match Site-A.
- B. Change the Site-A IKE Gateway profile exchange mode to aggressive mode.
- C. Enable NAT Traversal on the Site-A IKE Gateway profile.
- D. Change the pre-shared key of Site-B to match the pre-shared key of Site-A

Answer: D

NEW QUESTION 199

A company is upgrading its existing Palo Alto Networks firewall from version 7.0.1 to 7.0.4.

Which three methods can the firewall administrator use to install PAN-OS 8.0.4 across the enterprise?(Choose three)

- A. Download PAN-OS 8.0.4 files from the support site and install them on each firewall after manually uploading.
- B. Download PAN-OS 8.0.4 to a USB drive and the firewall will automatically update after the USB drive is inserted in the firewall.
- C. Push the PAN-OS 8.0.4 updates from the support site to install on each firewall.
- D. Push the PAN-OS 8.0.4 update from one firewall to all of the other remaining after updating one firewall.
- E. Download and install PAN-OS 8.0.4 directly on each firewall.
- F. Download and push PAN-OS 8.0.4 from Panorama to each firewall.

Answer: ACF

NEW QUESTION 202

Which three fields can be included in a pcap filter? (Choose three)

- A. Egress interface
- B. Source IP
- C. Rule number
- D. Destination IP
- E. Ingress interface

Answer: BCD

Explanation:

(<https://live.paloaltonetworks.com/t5/Featured-Articles/Getting-Started-Packet-Capture/ta-p/72069>)

NEW QUESTION 203

A network engineer has revived a report of problems reaching 98.139.183.24 through vr1 on the firewall. The routing table on this firewall is extensive and complex.

Which CLI command will help identify the issue?

- A. test routing fib virtual-router vr1
- B. show routing route type static destination 98.139.183.24
- C. test routing fib-lookup ip 98.139.183.24 virtual-router vr1
- D. show routing interface

Answer: C

NEW QUESTION 208

A network Administrator needs to view the default action for a specific spyware signature. The administrator follows the tabs and menus through Objects> Security Profiles> Anti-Spyware and select default profile.

What should be done next?

- A. Click the simple-critical rule and then click the Action drop-down list.
- B. Click the Exceptions tab and then click show all signatures.
- C. View the default actions displayed in the Action column.
- D. Click the Rules tab and then look for rules with "default" in the Action column.

Answer: B

NEW QUESTION 212


Which two mechanisms help prevent a spilt brain scenario an Active/Passive High Availability (HA) pair? (Choose two)

- A. Configure the management interface as HA3 Backup
- B. Configure Ethernet 1/1 as HA1 Backup
- C. Configure Ethernet 1/1 as HA2 Backup
- D. Configure the management interface as HA2 Backup
- E. Configure the management interface as HA1 Backup
- F. Configure ethernet1/1 as HA3 Backup

Answer: BE

NEW QUESTION 213

Click the Exhibit button

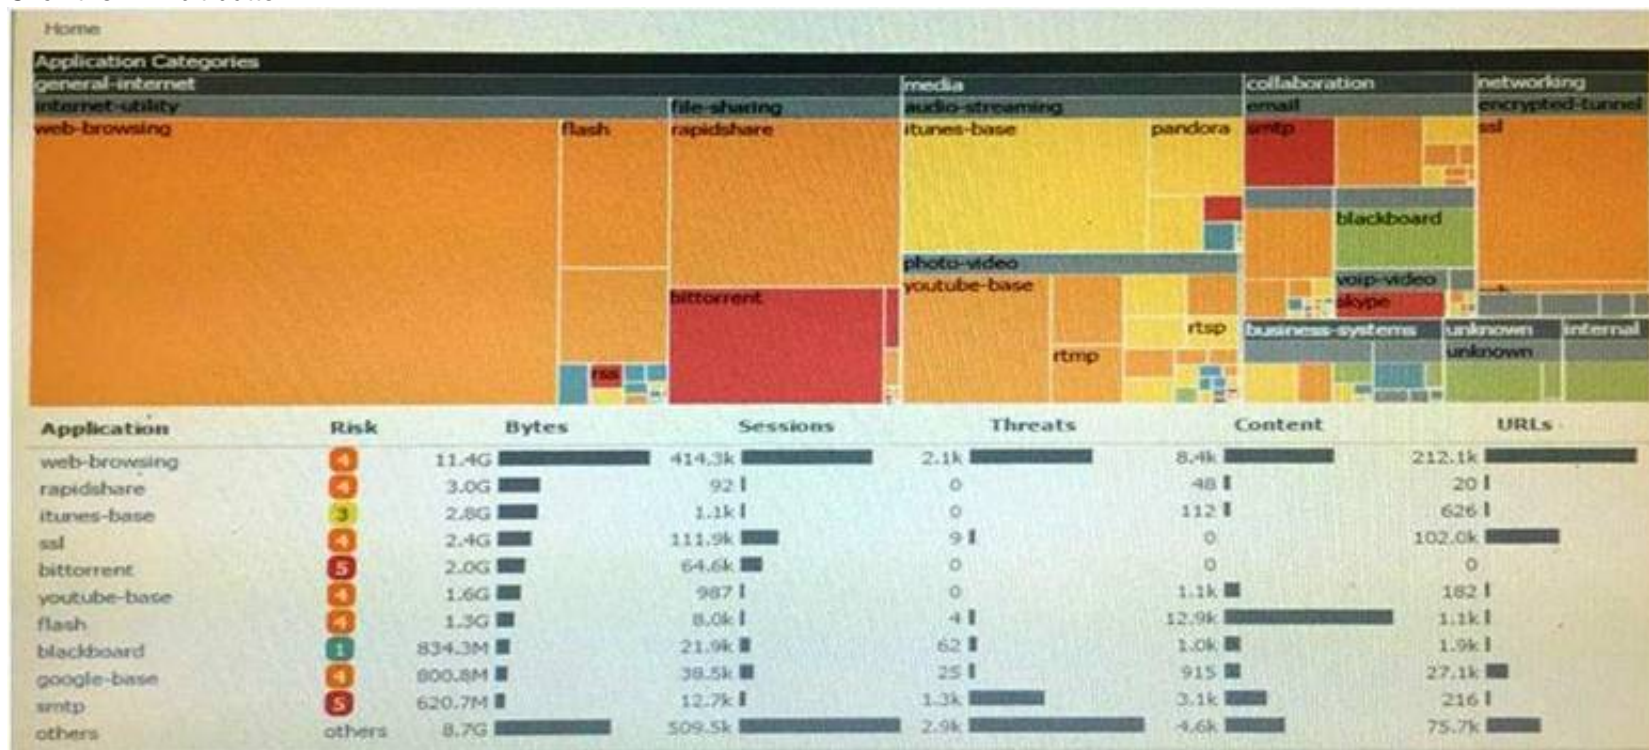

An administrator has noticed a large increase in bittorrent activity. The administrator wants to determine where the traffic is going on the company. What would be the administrator's next step?

- A. Right-Click on the bittorrent link and select Value from the context menu
- B. Create a global filter for bittorrent traffic and then view Traffic logs.
- C. Create local filter for bittorrent traffic and then view Traffic logs.
- D. Click on the bittorrent application link to view network activity

Answer: D

NEW QUESTION 218

Which command can be used to validate a Captive Portal policy?

- A. eval captive-portal policy <criteria>
- B. request cp-policy-eval <criteria>
- C. test cp-policy-match <criteria>
- D. debug cp-policy <criteria>

Answer: C

NEW QUESTION 220

What are three valid actions in a File Blocking Profile? (Choose three)

- A. Forward
- B. Block
- C. Alert
- D. Upload
- E. Reset-both
- F. Continue

Answer: ABC

Explanation:

<https://live.paloaltonetworks.com/t5/Configuration-Articles/File-Blocking-Rulebase-and-Action-Precedence/ta-p/53623>
<https://live.paloaltonetworks.com/t5/Configuration-Articles/File-Blocking-Rulebase-and-Action-Precedence/ta-p/53623>
<https://live.paloaltonetworks.com/t5/Configuration-Articles/File-Blocking-Rulebase-and-Action-Precedence/ta-p/53623>

NEW QUESTION 223

A company has a pair of Palo Alto Networks firewalls configured as an Active/Passive High Availability (HA) pair. What allows the firewall administrator to determine the last date a failover event occurred?

- A. From the CLI issue use the show System log
- B. Apply the filter subtype eq ha to the System log
- C. Apply the filter subtype eq ha to the configuration log
- D. Check the status of the High Availability widget on the Dashboard of the GUI

Answer: B

NEW QUESTION 225

The company's Panorama server (IP 10.10.10.5) is not able to manage a firewall that was recently deployed. The firewall's dedicated management port is being used to connect to the management network.

Which two commands may be used to troubleshoot this issue from the CLI of the new firewall? (Choose two)

- A. test panoramas-connect 10.10.10.5
- B. show panoramas-status
- C. show arp all | match 10.10.10.5
- D. topdump filter "host 10.10.10.5
- E. debug dataplane packet-diag set capture on

Answer: BD

NEW QUESTION 229

An Administrator is configuring an IPSec VPN to a Cisco ASA at the administrator's home and experiencing issues completing the connection. The following is the output from the command:

less mp-log ikemgr.log:

```
less mp-log ikemgr.log:
```

```
2014-08-05 03:51:41 [INFO]: IPsec-SA request for 108.81.64.59 queued since no phase1 found
2014-08-05 03:51:41 [PROTO_NOTIFY]: <====> PHASE-1 NEGOTIATION STARTED AS INITIATOR, MAIN MODE <====
====> Initiated SA: 69.15.96.53[500]-108.81.64.59[500] cookie:09e85260f28f4e15:0000000000000000 <====
2014-08-05 03:52:33 [PROTO_NOTIFY]: <====> PHASE-1 NEGOTIATION FAILED AS INITIATOR, MAIN MODE <====
====> Failed SA: 69.15.96.53[500]-108.81.64.59[500] cookie:09e85260f28f4e15:0000000000000000 <==== Due to
timeout.
2014-08-05 03:52:33 [INFO]: <====> PHASE-1 SA DELETED <====
====> Deleted SA: 69.15.96.53[500]-108.81.64.59[500] cookie:09e85260f28f4e15:0000000000000000 <====
2014-08-05 03:53:02 [INFO]: IPsec-SA request for 108.81.64.59 queued since no phase1 found
2014-08-05 03:53:02 [PROTO_NOTIFY]: <====> PHASE-1 NEGOTIATION STARTED AS INITIATOR, MAIN MODE <====
====> Initiated SA: 69.15.96.53[500]-108.81.64.59[500] cookie:53351420a9a1aa47:0000000000000000 <====
2014-08-05 03:53:54 [PROTO_NOTIFY]: <====> PHASE-1 NEGOTIATION FAILED AS INITIATOR, MAIN MODE <====
====> Failed.SA: 69.15.96.53[500]-108.81.64.59[500] cookie:53351420a9a1aa47:0000000000000000 <==== Due to
timeout.
2014-08-05 03:53:54 [INFO]: <====> PHASE-1 SA DELETED <====
```

What could be the cause of this problem?

- A. The public IP addresses do not match for both the Palo Alto Networks Firewall and the ASA.
- B. The Proxy IDs on the Palo Alto Networks Firewall do not match the settings on the ASA.
- C. The shared secrets do not match between the Palo Alto firewall and the ASA
- D. The dead peer detection settings do not match between the Palo Alto Networks Firewall and the ASA

Answer: B

NEW QUESTION 230

Which three options are available when creating a security profile? (Choose three)

- A. Anti-Malware
- B. File Blocking
- C. URL Filtering
- D. IDS/IPS

E. Threat Prevention
F. Antivirus

Answer: ABF

NEW QUESTION 235

Which two methods can be used to mitigate resource exhaustion of an application server? (Choose two)

- A. Vulnerability Object
- B. DoS Protection Profile
- C. Data Filtering Profile
- D. Zone Protection Profile

Answer: BD

NEW QUESTION 239

A Palo Alto Networks firewall is being targeted by an NTP Amplification attack and is being flooded with tens thousands of bogus UDP connections per second to a single destination IP address and port.

Which option when enabled with the correction threshold would mitigate this attack without dropping legitimate traffic to other hosts inside the network?

- A. Zone Protection Policy with UDP Flood Protection
- B. QoS Policy to throttle traffic below maximum limit
- C. Security Policy rule to deny traffic to the IP address and port that is under attack
- D. Classified DoS Protection Policy using destination IP only with a Protect action

Answer: D

NEW QUESTION 244

Which two options are required on an M-100 appliance to configure it as a Log Collector? (Choose two)

- A. From the Panorama tab of the Panorama GUI select Log Collector mode and then commit changes
- B. Enter the command request system system-mode logger then enter Y to confirm the change to Log Collector mode.
- C. From the Device tab of the Panorama GUI select Log Collector mode and then commit changes.
- D. Enter the command logger-mode enable then enter Y to confirm the change to Log Collector mode.
- E. Log in the Panorama CLI of the dedicated Log Collector

Answer: BE

Explanation:

(https://www.paloaltonetworks.com/documentation/60/panorama/panorama_adminguide/set-up-panorama/set-up-the-m-100-appliance)

NEW QUESTION 246

A firewall administrator has completed most of the steps required to provision a standalone Palo Alto Networks Next-Generation Firewall. As a final step, the administrator wants to test one of the security policies.

Which CLI command syntax will display the rule that matches the test?

- A. test security -policy- match source <ip_address> destination <IP_address> destination port <port number> protocol <protocol number>
- B. show security rule source <ip_address> destination <IP_address> destination port <port number> protocol <protocol number>
- C. test security rule source <ip_address> destination <IP_address> destination port <port number> protocol <protocol number>
- D. show security-policy-match source <ip_address> destination <IP_address> destination port <port number> protocol <protocol number> test security-policy-match source

Answer: A

Explanation:

test security-policy-match source <source IP> destination <destination IP> protocol <protocol number>

<https://live.paloaltonetworks.com/t5/Management-Articles/How-to-Test-Which-Security-Policy- Applies-to-a-Traffic-Flow/ta-p/53693>

NEW QUESTION 247

Palo Alto Networks maintains a dynamic database of malicious domains.

Which two Security Platform components use this database to prevent threats? (Choose two)

- A. Brute-force signatures
- B. BrightCloud URL Filtering
- C. PAN-DB URL Filtering
- D. DNS-based command-and-control signatures

Answer: CD

NEW QUESTION 248

A company has a web server behind a Palo Alto Networks next-generation firewall that it wants to make accessible to the public at 1.1.1.1. The company has decided to configure a destination NAT Policy rule.

Given the following zone information:

- DMZ zone: DMZ-L3
- Public zone: Untrust-L3

- Guest zone: Guest-L3
- Web server zone: Trust-L3
- Public IP address (Untrust-L3): 1.1.1.1
- Private IP address (Trust-L3): 192.168.1.50

What should be configured as the destination zone on the Original Packet tab of NAT Policy rule?

- A. Untrust-L3
- B. DMZ-L3
- C. Guest-L3
- D. Trust-L3

Answer: A

NEW QUESTION 250

Company.com has an in-house application that the Palo Alto Networks device doesn't identify correctly. A Threat Management Team member has mentioned that this in-house application is very sensitive and all traffic being identified needs to be inspected by the Content-ID engine. Which method should company.com use to immediately address this traffic on a Palo Alto Networks device?

- A. Create a custom Application without signatures, then create an Application Override policy that includes the source, Destination, Destination Port/Protocol and Custom Application of the traffic.
- B. Wait until an official Application signature is provided from Palo Alto Networks.
- C. Modify the session timer settings on the closest referenced application to meet the needs of the in-house application
- D. Create a Custom Application with signatures matching unique identifiers of the in-house application traffic

Answer: D

NEW QUESTION 254

What must be used in Security Policy Rule that contain addresses where NAT policy applies?

- A. Pre-NAT address and Pre-NAT zones
- B. Post-NAT address and Post-Nat zones
- C. Pre-NAT address and Post-Nat zones
- D. Post-Nat addresses and Pre-NAT zones

Answer: C

NEW QUESTION 255

Click the Exhibit button below,

Exhibit Window							
			Source			Destination	
	Name	Tags	Zone/Interface	Address	User	Address	Application
1	PBF1	none	Trust-L3	192.168.10.0/24	any	172.16.10.0/24	any
2	PBF2	none	Trust-L3	192.168.10.0/24	any	172.16.10.0/24	any
3	PBF3	none	Trust-L3	192.168.10.0/24	Will	172.16.10.0/24	any

Forwarding				
Service	Action	Egress I/F	Next Hop	Enforce Symmetric Return
any	forward	ethernet1/2.2	172.20.20.1	false
service-http	forward	ethernet1/3.2	172.20.30.1	false
service-https	forward	ethernet1/3.3	172.20.40.1	false

A firewall has three PBF rules and a default route with a next hop of 172.20.10.1 that is configured in the default VR. A user named Will has a PC with a 192.168.10.10 IP address. He makes an HTTPS connection to 172.16.10.20.

Which is the next hop IP address for the HTTPS traffic from Will's PC?

- A. 172.20.30.1
- B. 172.20.40.1
- C. 172.20.20.1
- D. 172.20.10.1

Answer: C

NEW QUESTION 259

Which three function are found on the dataplane of a PA-5050? (Choose three)

- A. Protocol Decoder
- B. Dynamic routing
- C. Management
- D. Network Processing
- E. Signature Match

Answer: BDE

NEW QUESTION 264

What can missing SSL packets when performing a packet capture on dataplane interfaces?

- A. The packets are hardware offloaded to the offloaded processor on the dataplane
- B. The missing packets are offloaded to the management plane CPU
- C. The packets are not captured because they are encrypted
- D. There is a hardware problem with offloading FPGA on the management plane

Answer: A

NEW QUESTION 265

A host attached to ethernet1/3 cannot access the internet. The default gateway is attached to ethernet1/4. After troubleshooting. It is determined that traffic cannot pass from the ethernet1/3 to ethernet1/4. What can be the cause of the problem?

- A. DHCP has been set to Auto.
- B. Interface ethernet1/3 is in Layer 2 mode and interface ethernet1/4 is in Layer 3 mode.
- C. Interface ethernet1/3 and ethernet1/4 are in Virtual Wire Mode.
- D. DNS has not been properly configured on the firewall

Answer: B

NEW QUESTION 267

The GlobalProtect Portal interface and IP address have been configured. Which other value needs to be defined to complete the network settings configuration of GlobalProtect Portal?

- A. Server Certificate
- B. Client Certificate
- C. Authentication Profile
- D. Certificate Profile

Answer: A

Explanation:

(<https://live.paloaltonetworks.com/t5/Configuration-Articles/How-to-Configure-GlobalProtect/ta-p/58351>)

NEW QUESTION 272

A client is deploying a pair of PA-5000 series firewalls using High Availability (HA) in Active/Passive mode. Which statement is true about this deployment?

- A. The two devices must share a routable floating IP address
- B. The two devices may be different models within the PA-5000 series
- C. The HA1 IP address from each peer must be on a different subnet
- D. The management port may be used for a backup control connection

Answer: D

NEW QUESTION 273

Support for which authentication method was added in PAN-OS 8.0?

- A. RADIUS
- B. LDAP
- C. Diameter
- D. TACACS+

Answer: D

Explanation:

<https://www.paloaltonetworks.com/resources/datasheets/whats-new-in-pan-os-7-1>

NEW QUESTION 278

A company.com wants to enable Application Override. Given the following screenshot:



Which two statements are true if Source and Destination traffic match the Application Override policy? (Choose two)

- A. Traffic that matches "rtp-base" will bypass the App-ID and Content-ID engines.
- B. Traffic will be forced to operate over UDP Port 16384.
- C. Traffic utilizing UDP Port 16384 will now be identified as "rtp-base".
- D. Traffic utilizing UDP Port 16384 will bypass the App-ID and Content-ID engines.

Answer: AC

NEW QUESTION 281

A Network Administrator wants to deploy a Large Scale VPN solution. The Network Administrator has chosen a GlobalProtect Satellite solution. This configuration needs to be deployed to multiple remote offices and the Network Administrator decides to use Panorama to deploy the configurations. How should this be accomplished?

- A. Create a Template with the appropriate IKE Gateway settings
- B. Create a Template with the appropriate IPsec tunnel settings
- C. Create a Device Group with the appropriate IKE Gateway settings
- D. Create a Device Group with the appropriate IPsec tunnel settings

Answer: B

NEW QUESTION 286

Which option is an IPv6 routing protocol?

- A. RIPv3
- B. OSPFv3
- C. OSPv3
- D. BGP NG

Answer: B

NEW QUESTION 291

A network design change requires an existing firewall to start accessing Palo Alto Updates from a data plane interface address instead of the management interface.

Which configuration setting needs to be modified?

- A. Service route
- B. Default route
- C. Management profile
- D. Authentication profile

Answer: A

NEW QUESTION 292

Which URL Filtering Security Profile action toggles the URL Filtering category to the URL Filtering log?

- A. Log
- B. Alert
- C. Allow
- D. Default

Answer: B

NEW QUESTION 295

A network security engineer has a requirement to allow an external server to access an internal web server. The internal web server must also initiate connections with the external server.

What can be done to simplify the NAT policy?

- A. Configure ECMP to handle matching NAT traffic
- B. Configure a NAT Policy rule with Dynamic IP and Port
- C. Create a new Source NAT Policy rule that matches the existing traffic and enable the Bi-directional option
- D. Create a new Destination NAT Policy rule that matches the existing traffic and enable the Bi-directional option

Answer: C

Explanation:

<https://www.paloaltonetworks.com/documentation/70/pan-os/pan-os/networking/nat-configuration-examples>

NEW QUESTION 300

Which Panorama feature allows for logs generated by Panorama to be forwarded to an external Security Information and Event Management(SIEM) system?

- A. Panorama Log Settings
- B. Panorama Log Templates
- C. Panorama Device Group Log Forwarding
- D. Collector Log Forwarding for Collector Groups

Answer: A

Explanation:


https://www.paloaltonetworks.com/documentation/61/panorama/panorama_adminHYPERLINK

"[https://www.paloaltonetworks.com/documentation/61/panorama/panorama_adminguide/manag e-log-collection/enable-log-forwarding-from-panorama-to-external-destinations](https://www.paloaltonetworks.com/documentation/61/panorama/panorama_adminguide/manag-e-log-collection/enable-log-forwarding-from-panorama-to-external-destinations)"nguidHYPERLINK "[https://www.paloaltonetworks.com/documentation/61/panorama/panorama_adminguide/manag e-log-collection/enable-log-forwarding-from-panorama-to-external-destinations](https://www.paloaltonetworks.com/documentation/61/panorama/panorama_adminguide/manag-e-log-collection/enable-log-forwarding-from-panorama-to-external-destinations)"e/manage-log- collection/enable-log-forwarding-from-panorama-to-external-destinaHYPERLINK

"[https://www.paloaltonetworks.com/documentation/61/panorama/panorama_adminguide/manag e-log-collection/enable-log-forwarding-from-panorama-to-external-destinations](https://www.paloaltonetworks.com/documentation/61/panorama/panorama_adminguide/manag-e-log-collection/enable-log-forwarding-from-panorama-to-external-destinations)"tions

NEW QUESTION 304

What will be the source address in the ICMP packet?

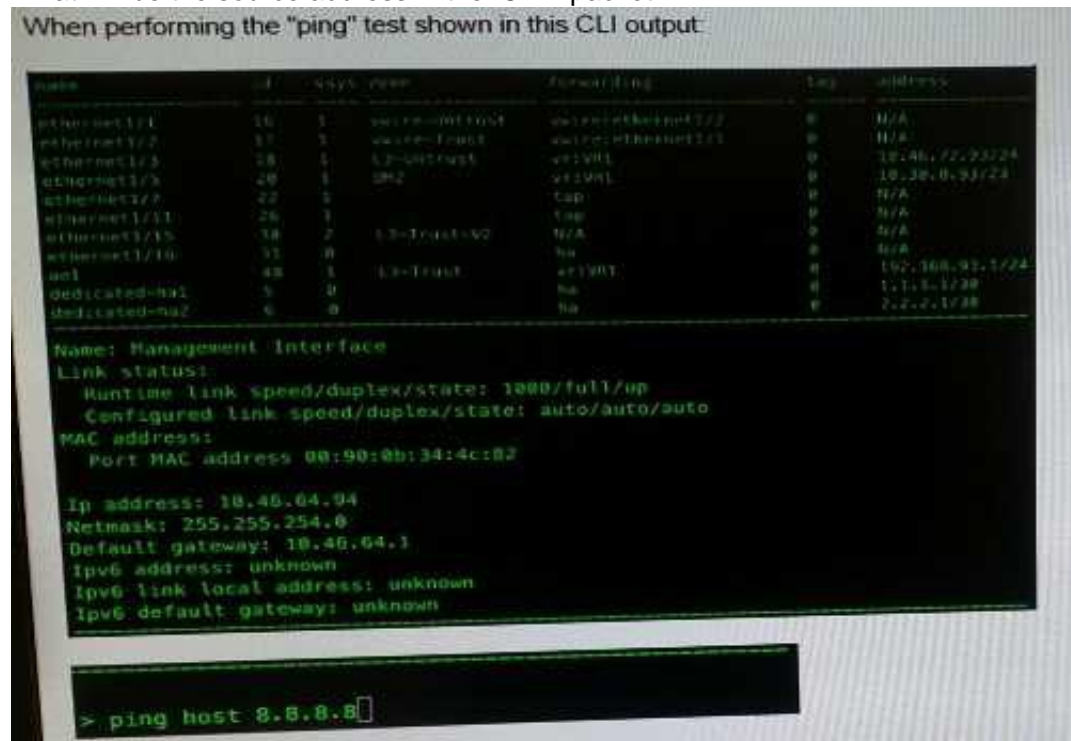

"The command show system resources gives a snapshot of Management Plane (MP) resource utilization including memory and CPU. This is similar to the 'top' command in Linux." <https://live.paloaltonetworks.com/t5/Learning-Articles/How-to-Interpret-show-system-resources/ta-p/59364>"
"https://live.paloaltonetworks.com/t5/Learning-Articles/How-to-Interpret-show-system-resources/ta-p/59364"ks.com/t5/Learning-Articles/How-to-Interpret-show-system-resources/ta-p/59364

NEW QUESTION 314

Which two logs on the firewall will contain authentication-related information useful for troubleshooting purpose (Choose two)

- A. ms.log
- B. traffic.log
- C. system.log
- D. dp-monitor.log
- E. authd.log

Answer: CE

NEW QUESTION 315

How can a Palo Alto Networks firewall be configured to send syslog messages in a format compatible with non-standard syslog servers?

- A. Enable support for non-standard syslog messages under device management
- B. Check the custom-format check box in the syslog server profile
- C. Select a non-standard syslog server profile
- D. Create a custom log format under the syslog server profile

Answer: D

NEW QUESTION 319

Refer to Exhibit:

Exhibit Window					
	Name	Tags	Zone/Interface	Source	
1	PBF1	none	Trust-L3	192.168.10.0/24	any
2	PBF2	none	Trust-L3	192.168.10.0/24	any
3	PBF3	none	Trust-L3	192.168.10.0/24	Will

Exhibit Window					
	Application	Service	Action	Egress I/F	Next Hop
4	any	any	forward	ethernet1/2.2	172.20.20.1
4	any	service-http	forward	ethernet1/3.2	172.20.30.1
4	any	service-https	forward	ethernet1/3.3	172.20.40.1

A firewall has three PDF rules and a default route with a next hop of 172.29.19.1 that is configured in the default VR. A user named XX-bes a PC with a 192.168.101.10 IP address. He makes an HTTPS connection to 172.16.10.29. What is the next hop IP address for the HTTPS traffic from Wills PC.

- A. 172.20.30.1
- B. 172.20.20.1
- C. 172.20.10.1
- D. 172.20.40.1

Answer: B

NEW QUESTION 323

Which two actions are required to make Microsoft Active Directory users appear in a firewall traffic log? (Choose two.)

- A. Run the User-ID Agent using an Active Directory account that has "event log viewer" permissions
- B. Enable User-ID on the zone object for the destination zone
- C. Run the User-ID Agent using an Active Directory account that has "domain administrator" permissions
- D. Enable User-ID on the zone object for the source zone
- E. Configure a RADIUS server profile to point to a domain controller

Answer: AD

NEW QUESTION 326

Which two virtualized environments support Active/Active High Availability (HA) in PAN-OS 8.0? (Choose two.)

- A. KVM
- B. VMware ESX
- C. VMware NSX
- D. AWS

Answer: AB

NEW QUESTION 327

Site-A and Site-B need to use IKEv2 to establish a VPN connection. Site A connects directly to the internet using a public IP address. Site-B uses a private IP address behind an ISP router to connect to the internet.

How should NAT Traversal be implemented for the VPN connection to be established between Site-A and Site-B?

- A. Enable on Site-A only
- B. Enable on Site-B only
- C. Enable on Site-B only with passive mode
- D. Enable on Site-A and Site-B

Answer: D

NEW QUESTION 329

YouTube videos are consuming too much bandwidth on the network, causing delays in mission- critical traffic. The administrator wants to throttle YouTube traffic. The following interfaces and zones are in use on the firewall:

* ethernet1/1, Zone: Untrust (Internet-facing)

* ethernet1/2, Zone: Trust (client-facing)

A QoS profile has been created, and QoS has been enabled on both interfaces. A QoS rule exists to put the YouTube application into QoS class 6. Interface Ethernet1/1 has a QoS profile called Outbound, and interface Ethernet1/2 has a QoS profile called Inbound.

Which setting for class 6 with throttle YouTube traffic?

- A. Outbound profile with Guaranteed Ingress
- B. Outbound profile with Maximum Ingress
- C. Inbound profile with Guaranteed Egress
- D. Inbound profile with Maximum Egress

Answer: D

NEW QUESTION 333

.....

About ExamBible

[Your Partner of IT Exam](#)

Found in 1998

ExamBible is a company specialized on providing high quality IT exam practice study materials, especially Cisco CCNA, CCDA, CCNP, CCIE, Checkpoint CCSE, CompTIA A+, Network+ certification practice exams and so on. We guarantee that the candidates will not only pass any IT exam at the first attempt but also get profound understanding about the certificates they have got. There are so many alike companies in this industry, however, ExamBible has its unique advantages that other companies could not achieve.

Our Advances

* 99.9% Uptime

All examinations will be up to date.

* 24/7 Quality Support

We will provide service round the clock.

* 100% Pass Rate

Our guarantee that you will pass the exam.

* Unique Gurantee

If you do not pass the exam at the first time, we will not only arrange FULL REFUND for you, but also provide you another exam of your claim, ABSOLUTELY FREE!

NEW QUESTION 1

What is the purpose of the firewall decryption broker?

- A. Decrypt SSL traffic a then send it as cleartext to a security chain of inspection tools
- B. Force decryption of previously unknown cipher suites
- C. Inspection traffic within IPsec tunnel
- D. Reduce SSL traffic to a weaker cipher before sending it to a security chain of inspection tools

Answer: A

NEW QUESTION 2


Which three split tunnel methods are supported by a globalProtect gateway? (Choose three.)

- A. video streaming application
- B. Client Application Process
- C. Destination Domain
- D. Source Domain
- E. Destination user/group
- F. URL Category

Answer: ABC

NEW QUESTION 3

Based on the image, what caused the commit warning?

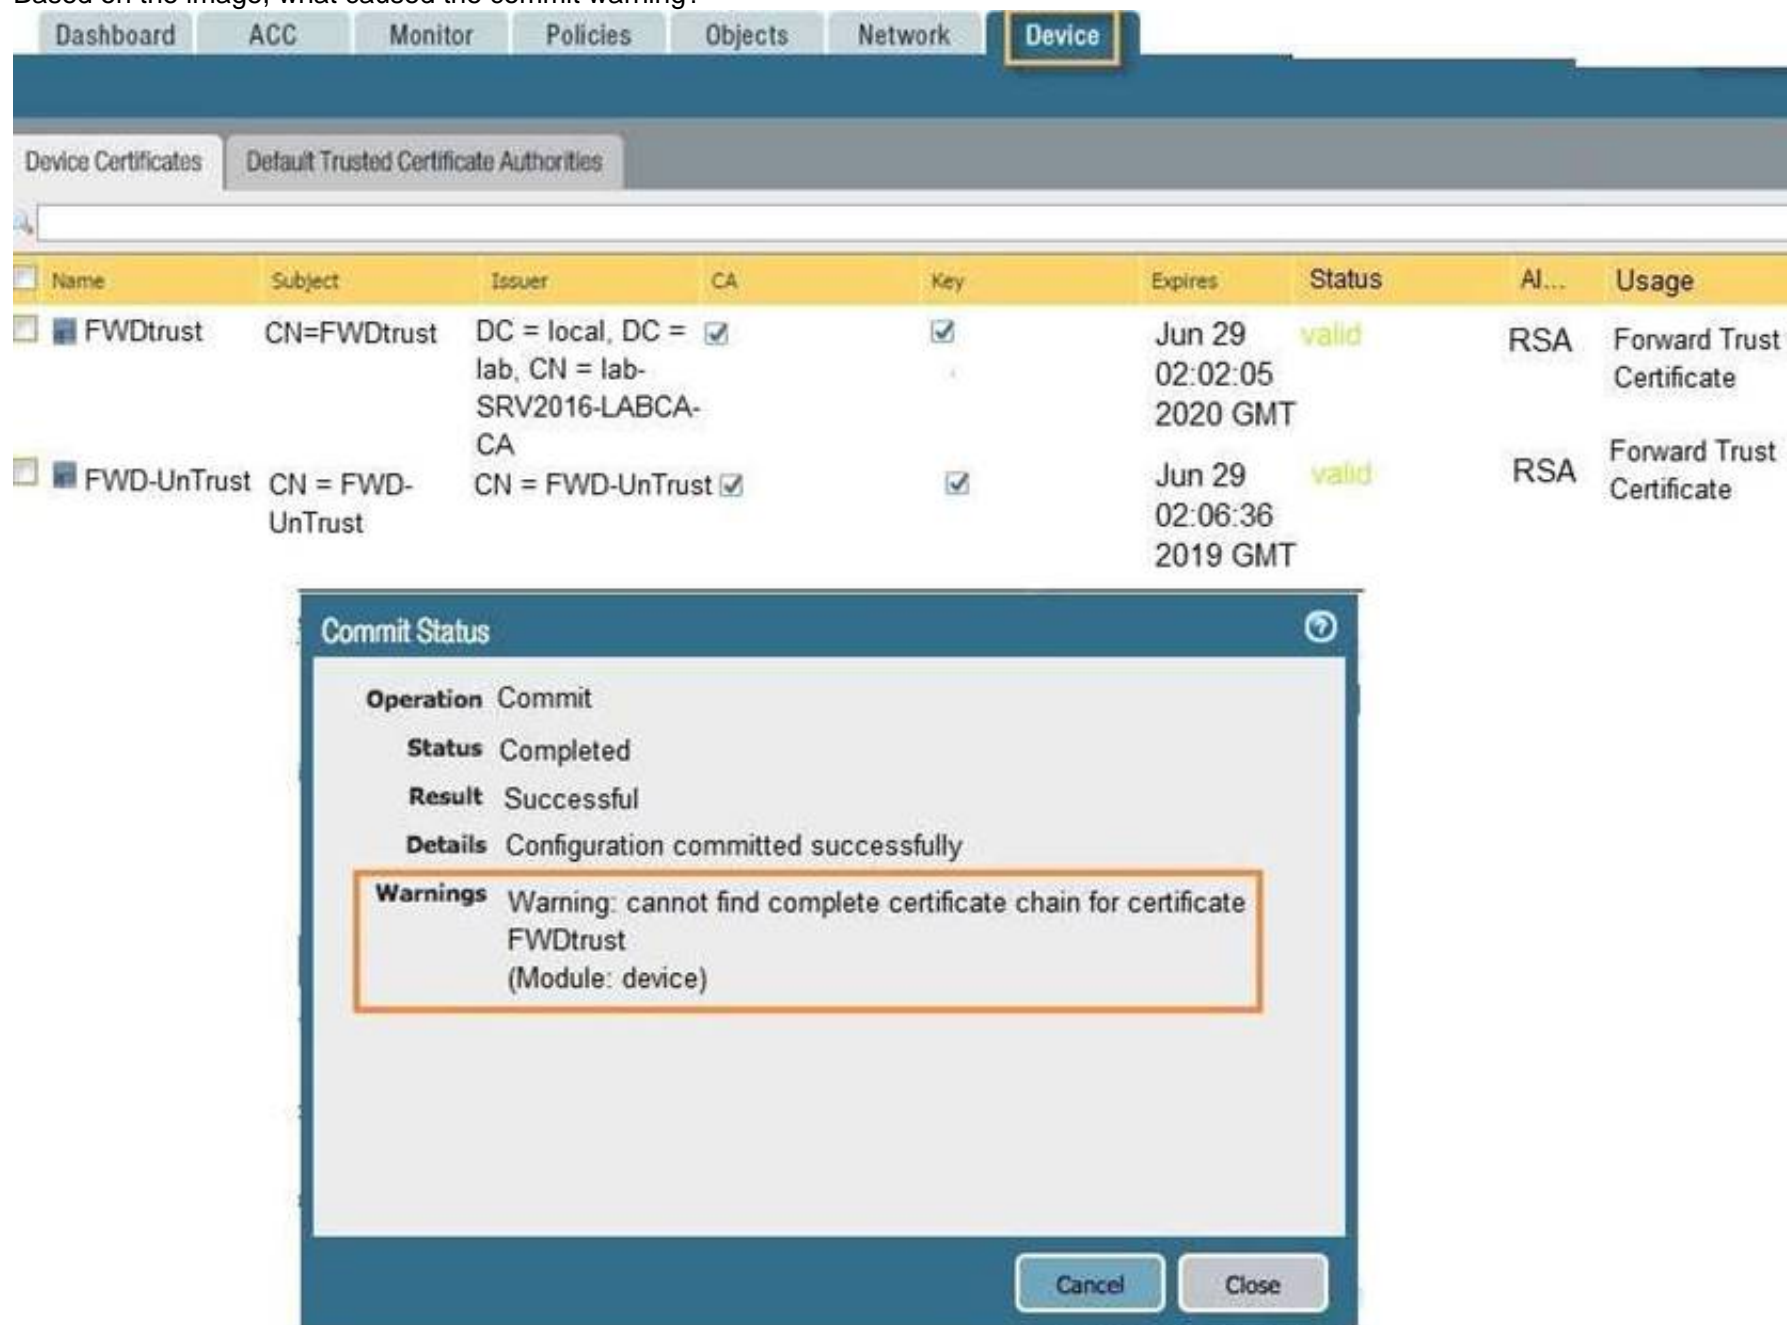

The screenshot shows the Palo Alto Networks GUI with the 'Device' tab selected. Under 'Device Certificates', there are two certificates listed:

Name	Subject	Issuer	CA	Key	Expires	Status	AI...	Usage
FWDtrust	CN=FWDtrust	DC = local, DC = lab, CN = lab-SRV2016-LABCA-CA	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Jun 29 02:02:05 2020 GMT	valid	RSA	Forward Trust Certificate
FWD-UnTrust	CN = FWD-UnTrust	CN = FWD-UnTrust	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Jun 29 02:06:36 2019 GMT	valid	RSA	Forward Trust Certificate

A 'Commit Status' dialog box is open, showing the following details:

- Operation: Commit
- Status: Completed
- Result: Successful
- Details: Configuration committed successfully
- Warnings: Warning: cannot find complete certificate chain for certificate FWDtrust (Module: device)

- A. The CA certificate for FWDtrust has not been imported into the firewall.
- B. The FWDtrust certificate has not been flagged as Trusted Root CA.
- C. SSL Forward Proxy requires a public certificate to be imported into the firewall.
- D. The FWDtrust certificate does not have a certificate chain.

Answer: D

NEW QUESTION 4

An administrator is defining protection settings on the Palo Alto Networks NGFW to guard against resource exhaustion. When platform utilization is considered, which steps must the administrator take to configure and apply packet buffer protection?

- A. Enable and configure the Packet Buffer protection thresholds.Enable Packet Buffer Protection per ingress zone.
- B. Enable and then configure Packet Buffer thresholdsEnable Interface Buffer protection.

- C. Create and Apply Zone Protection Profiles in all ingress zones.Enable Packet Buffer Protection per ingress zone.
- D. Configure and apply Zone Protection Profiles for all egress zones.Enable Packet Buffer Protection pre egress zone.
- E. Enable per-vsyz Session Threshold alerts and triggers for Packet Buffer Limits.Enable Zone Buffer Protection per zone.

Answer: A

NEW QUESTION 5

What are the two behavior differences between Highlight Unused Rules and the Rule Usage Hit counter when a firewall is rebooted? (Choose two.)

- A. Rule Usage Hit counter will not be reset
- B. Highlight Unused Rules will highlight all rules.
- C. Highlight Unused Rules will highlight zero rules.
- D. Rule Usage Hit counter will reset.

Answer: AB

NEW QUESTION 6

A customer wants to set up a VLAN interface for a Layer 2 Ethernet port.

Which two mandatory options are used to configure a VLAN interface? (Choose two.)

- A. Virtual router
- B. Security zone
- C. ARP entries
- D. Netflow Profile

Answer: AB

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/80/pan-os/web-interface-help/network/network-interfaces/pa-7000-series-layer-2-interface#idd2bcaacc-54b9-4ec9-a1dd-8064499f5b9d>

NEW QUESTION 7


An administrator pushes a new configuration from Panorama to a pair of firewalls that are configured as an active/passive HA pair. Which NGFW receives the configuration from Panorama?

- A. The Passive firewall, which then synchronizes to the active firewall
- B. The active firewall, which then synchronizes to the passive firewall
- C. Both the active and passive firewalls, which then synchronize with each other
- D. Both the active and passive firewalls independently, with no synchronization afterward

Answer: C

NEW QUESTION 8

Refer to the exhibit.

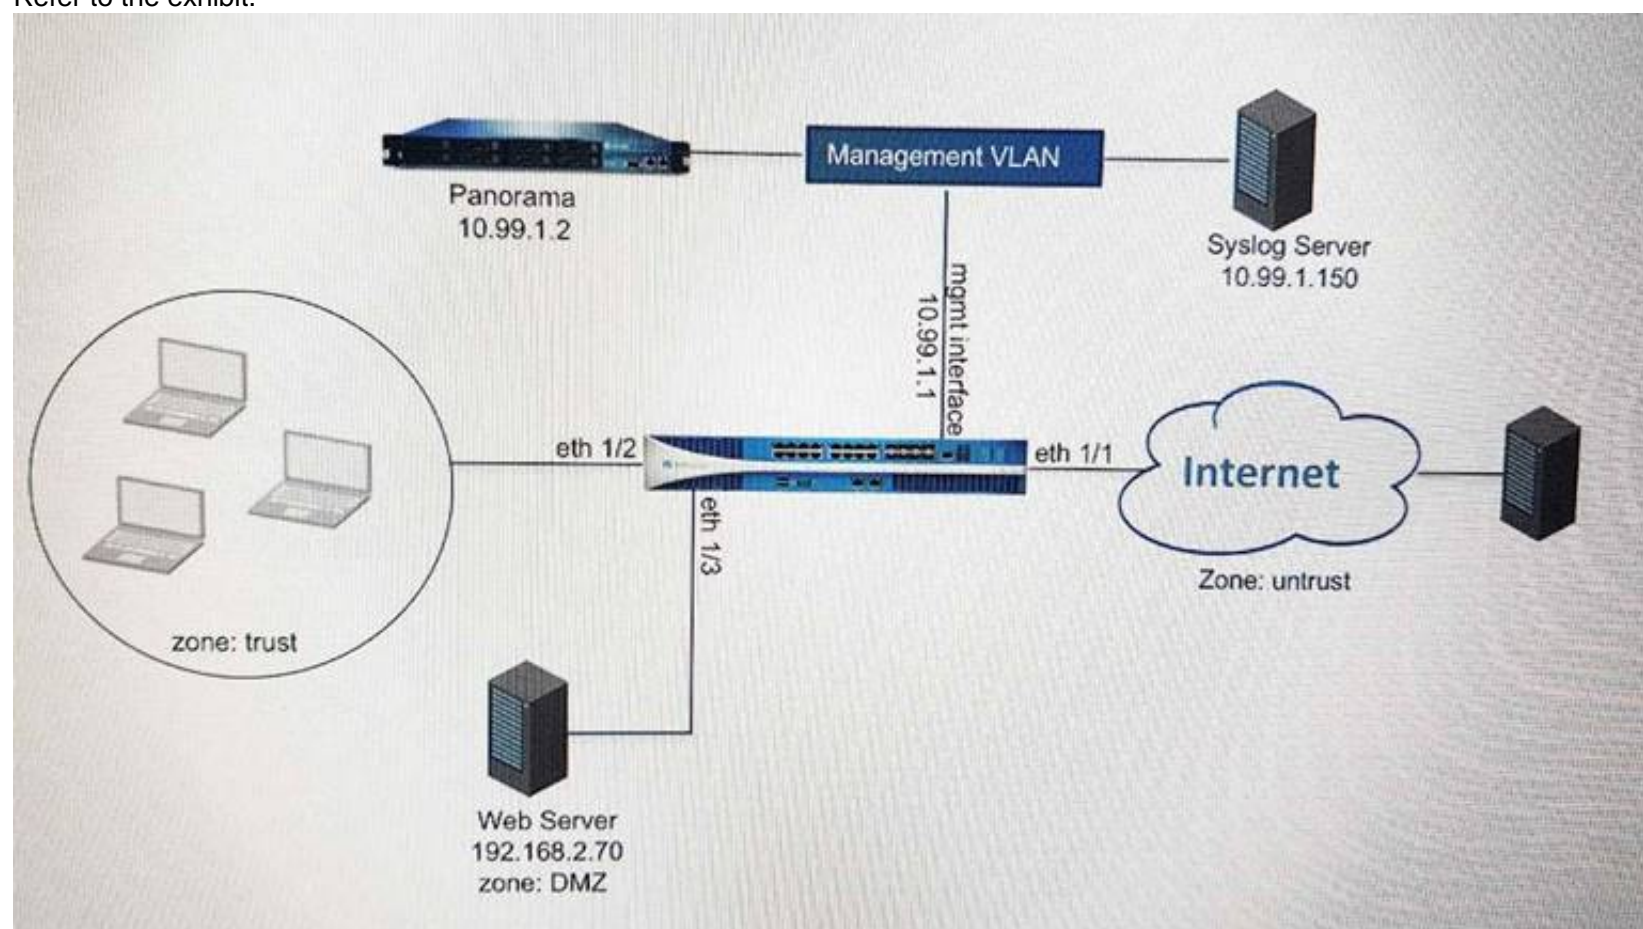

An administrator cannot see any of the Traffic logs from the Palo Alto Networks NGFW on Panorama. The configuration problem seems to be on the firewall side. Where is the best place on the Palo Alto Networks NGFW to check whether the configuration is correct?

A)

Panorama Settings

Panorama Servers

10.99.1.21

Receive Timeout for Connection to Panorama (sec) 240

Send Timeout for Connection to Panorama (sec) 240

Retry Count for SSL Send to Panorama 25

☐ **Secure Client Communication**

Certificate Type None

☐ Check Server Identity

B)

Security Policy Rule

General | Source | User | Destination | Application | Service/URL Category | Actions

Action Setting

Action: Allow

☐ Send ICMP Unreachable

Log Setting

☒ Log at Session Start

☒ Log at Session End

Log Forwarding: None

Profile Setting

Profile Type: Profiles

Antivirus: None

Vulnerability Protection: None

Anti-Spyware: None

URL Filtering: Filter1

File Blocking: None

Data Filtering: None

WildFire Analysis: None

Other Settings

Schedule: None

QoS Marking: None

☐ Disable Server Response Inspection

OK Cancel

C)

Syslog Server Profile

Name: SyslogProfile1

Servers Custom Log Format

Name	Syslog Server	Transport	Port	Format	Facility
SyslogServer1	192.168.229.17	UDP	514	BSD	LOG_USER

+ Add - Delete

D)

Panorama Settings

Receive Timeout for Connection to Device (sec) 240

Send Timeout for Connection to Device (sec) 240

Retry Count for SSL Send to Device 25

☒ Share Unused Address and Service Objects with Devices

☐ Objects defined in ancestors will take higher precedence

Secure Server Communication

☐ Custom Certificate Only

SSL/TLS Service Profile None

Certificate Profile None

Authorization List

Identifier	Type	Value
------------	------	-------

☐ Authorize Clients Based on Serial Number

☐ Check Authorization List

Connect Wait Time (min) [0 - 44640]

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: D

NEW QUESTION 9

When configuring a GlobalProtect Portal, what is the purpose of specifying an Authentication Profile?

- A. To enable Gateway authentication to the Portal
- B. To enable Portal authentication to the Gateway
- C. To enable user authentication to the Portal
- D. To enable client machine authentication to the Portal

Answer: C

Explanation:

The additional options of Browser and Satellite enable you to specify the authentication profile to use for specific scenarios. Select Browser to specify the authentication profile to use to authenticate a user accessing the portal from a web browser with the intent of downloading the GlobalProtect agent (Windows and Mac). Select Satellite to specify the authentication profile to use to authenticate the satellite.

Reference <https://www.paloaltonetworks.com/documentation/71/pan-os/web-interface-help/globalprotect/network-globalprotect-portals>

NEW QUESTION 10

If a template stack is assigned to a device and the stack includes three templates with overlapping settings, which settings are published to the device when the template stack is pushed?

- A. The settings assigned to the template that is on top of the stack.
- B. The administrator will be prompted to choose the settings for that chosen firewall.
- C. All the settings configured in all templates.
- D. Depending on the firewall location, Panorama decides which settings to send.

Answer: B

Explanation:

Reference:

https://www.paloaltonetworks.com/documentation/80/panorama/panorama_adminguide/manage-firewalls/manage-templates-and-template-stacks/configure-a-template-stack

NEW QUESTION 10

To connect the Palo Alto Networks firewall to AutoFocus, which setting must be enabled?

- A. Device>Setup>Services>AutoFocus
- B. Device> Setup>Management >AutoFocus
- C. AutoFocus is enabled by default on the Palo Alto Networks NGFW
- D. Device>Setup>WildFire>AutoFocus
- E. Device>Setup> Management> Logging and Reporting Settings

Answer: B

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/71/pan-os/pan-os/getting-started/enable-autofocus-threat-intelligence>

"<https://www.paloaltonetworks.com/documentation/71/pan-os/pan-os/getting-started/enable-autofocus-threat-intelligence>"

NEW QUESTION 11

Which User-ID method maps IP addresses to usernames for users connecting through an 802.1x- enabled wireless network device that has no native integration with PAN-OS® software?

- A. XML API
- B. Port Mapping
- C. Client Probing
- D. Server Monitoring

Answer: A

Explanation:

Captive Portal and the other standard user mapping methods might not work for certain types of user access. For example, the standard methods cannot add mappings of users connecting from a

third-party VPN solution or users connecting to a 802.1x-enabled wireless network. For such cases, you can use the PAN-OS XML API to capture login events and send them to the PAN-OS integrated User-ID agent Reference: <https://www.paloaltonetworks.com/documentation/71/pan-os/pan-os/user-id/user-id-concepts>

NEW QUESTION 12

Decrypted packets from the website <https://www.microsoft.com> will appear as which application and service within the Traffic log?

- A. web-browsing and 443
- B. SSL and 80
- C. SSL and 443
- D. web-browsing and 80

Answer: A

NEW QUESTION 17

Which PAN-OS® policy must you configure to force a user to provide additional credentials before he is allowed to access an internal application that contains highly-sensitive business data?

- A. Security policy
- B. Decryption policy
- C. Authentication policy
- D. Application Override policy

Answer: C

NEW QUESTION 18

A Security policy rule is configured with a Vulnerability Protection Profile and an action of ‘Deny’. Which action will this cause configuration on the matched traffic?

- A. The configuration is invalid
- B. The Profile Settings section will be grayed out when the Action is set to “Deny”.
- C. The configuration will allow the matched session unless a vulnerability signature is detected
- D. The “Deny” action will supersede the per-severity defined actions defined in the associated Vulnerability Protection Profile.
- E. The configuration is invalid
- F. It will cause the firewall to skip this Security policy rule
- G. A warning will be displayed during a commit.
- H. The configuration is valid
- I. It will cause the firewall to deny the matched session
- J. Any configured Security Profiles have no effect if the Security policy rule action is set to “Deny.”

Answer: B

NEW QUESTION 21

What are two benefits of nested device groups in Panorama? (Choose two.)

- A. Reuse of the existing Security policy rules and objects
- B. Requires configuring both function and location for every device
- C. All device groups inherit settings from the Shared group
- D. Overwrites local firewall configuration

Answer: BC

NEW QUESTION 23

An administrator needs to implement an NGFW between their DMZ and Core network. EIGRP Routing between the two environments is required. Which interface type would support this business requirement?

- A. Virtual Wire interfaces to permit EIGRP routing to remain between the Core and DMZ
- B. Layer 3 or Aggregate Ethernet interfaces, but configuring EIGRP on subinterfaces only
- C. Tunnel interfaces to terminate EIGRP routing on an IPsec tunnel (with the GlobalProtect License to support LSVPN and EIGRP protocols)
- D. Layer 3 interfaces, but configuring EIGRP on the attached virtual router

Answer: C

NEW QUESTION 28

A speed/duplex negotiation mismatch is between the Palo Alto Networks management port and the switch port which it connects. How would an administrator configure the interface to 1Gbps?

- A. set deviceconfig interface speed-duplex 1Gbps-full-duplex
- B. set deviceconfig system speed-duplex 1Gbps-duplex
- C. set deviceconfig system speed-duplex 1Gbps-full-duplex
- D. set deviceconfig Interface speed-duplex 1Gbps-half-duplex

Answer: B

Explanation:

Reference: <https://live.paloaltonetworks.com/t5/Configuration-Articles/How-to-Change-the-Speed-and-Duplex-of-the-Management-Port/ta-p/59034>

NEW QUESTION 33


A web server is hosted in the DMZ, and the server is configured to listen for incoming connections only on TCP port 8080. A Security policy rule allowing access from the Trust zone to the DMZ zone need to be configured to enable web browsing access to the server. Which application and service need to be configured to allow only cleartext web-browsing traffic to this server on tcp/8080.

- A. application: web-browsing; service: application-default
- B. application: web-browsing; service: service-https
- C. application: ssl; service: any
- D. application: web-browsing; service: (custom with destination TCP port 8080)

Answer: A

NEW QUESTION 36

If the firewall has the link monitoring configuration, what will cause a failover?

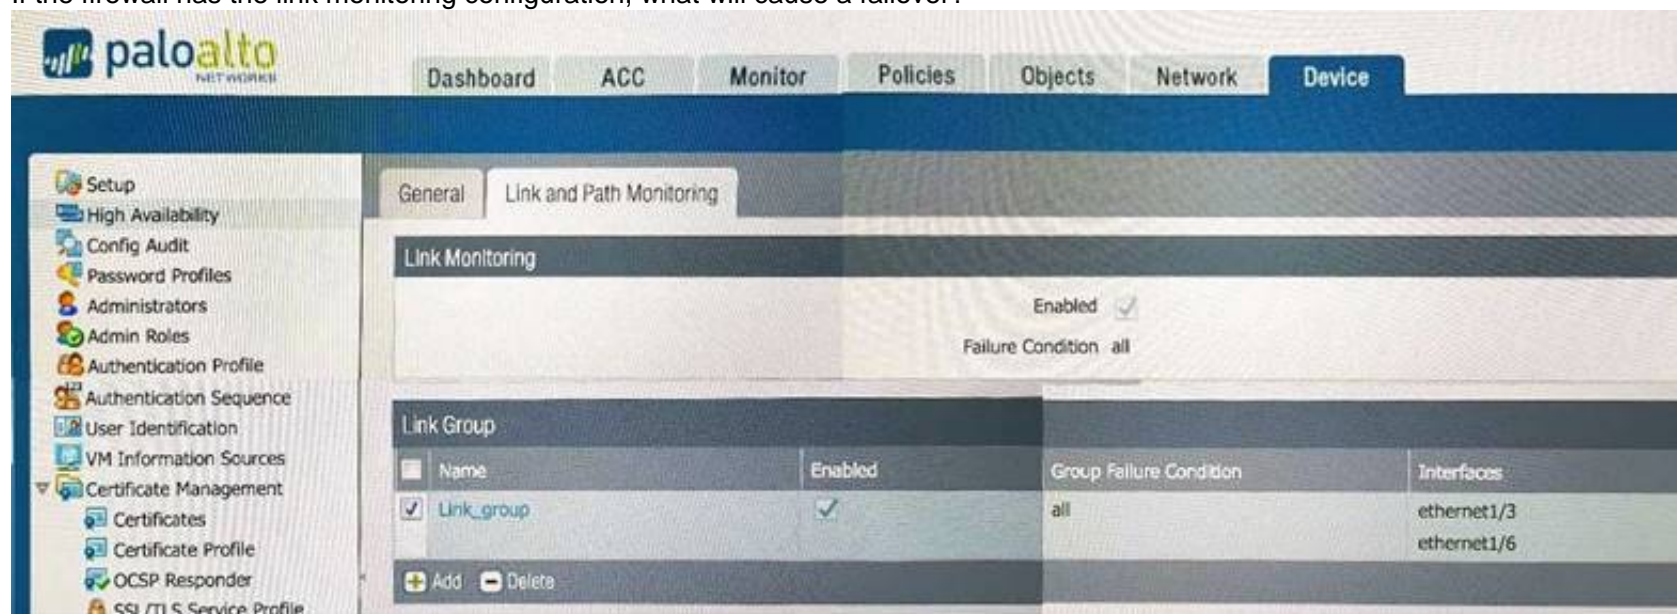

- A. ethernet1/3 and ethernet1/6 going down
- B. ethernet1/3 going down
- C. ethernet1/3 or Ethernet1/6 going down
- D. ethernet1/6 going down

Answer: A

NEW QUESTION 39

How would an administrator monitor/capture traffic on the management interface of the Palo Alto Networks NGFW?

- A. Use the debug dataplane packet-diag set capture stage firewall file command.
- B. Enable all four stages of traffic capture (TX, RX, DROP, Firewall).

- C. Use the debug dataplane packet-diag set capture stage management file command.
D. Use the tcpdump command.

Answer: D


Explanation:

Reference: <https://live.paloaltonetworks.com/t5/Learning-Articles/How-to-Run-a-Packet-Capture/ta-p/62390>


NEW QUESTION 41

An administrator needs to determine why users on the trust zone cannot reach certain websites. The only information available is shown on the following image.
Which configuration change should the administrator make?


A)

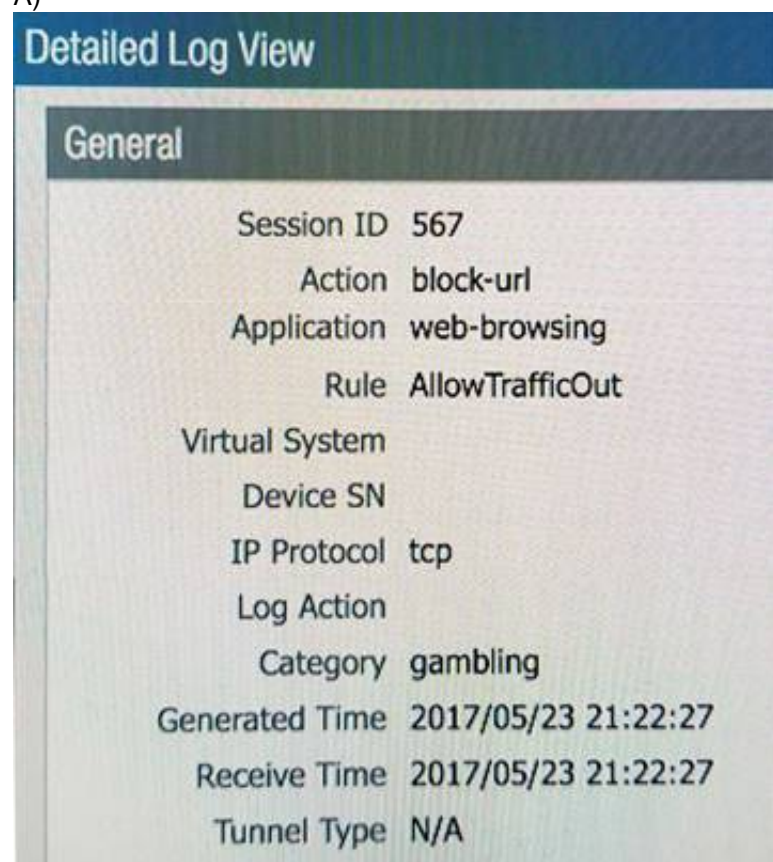


B)

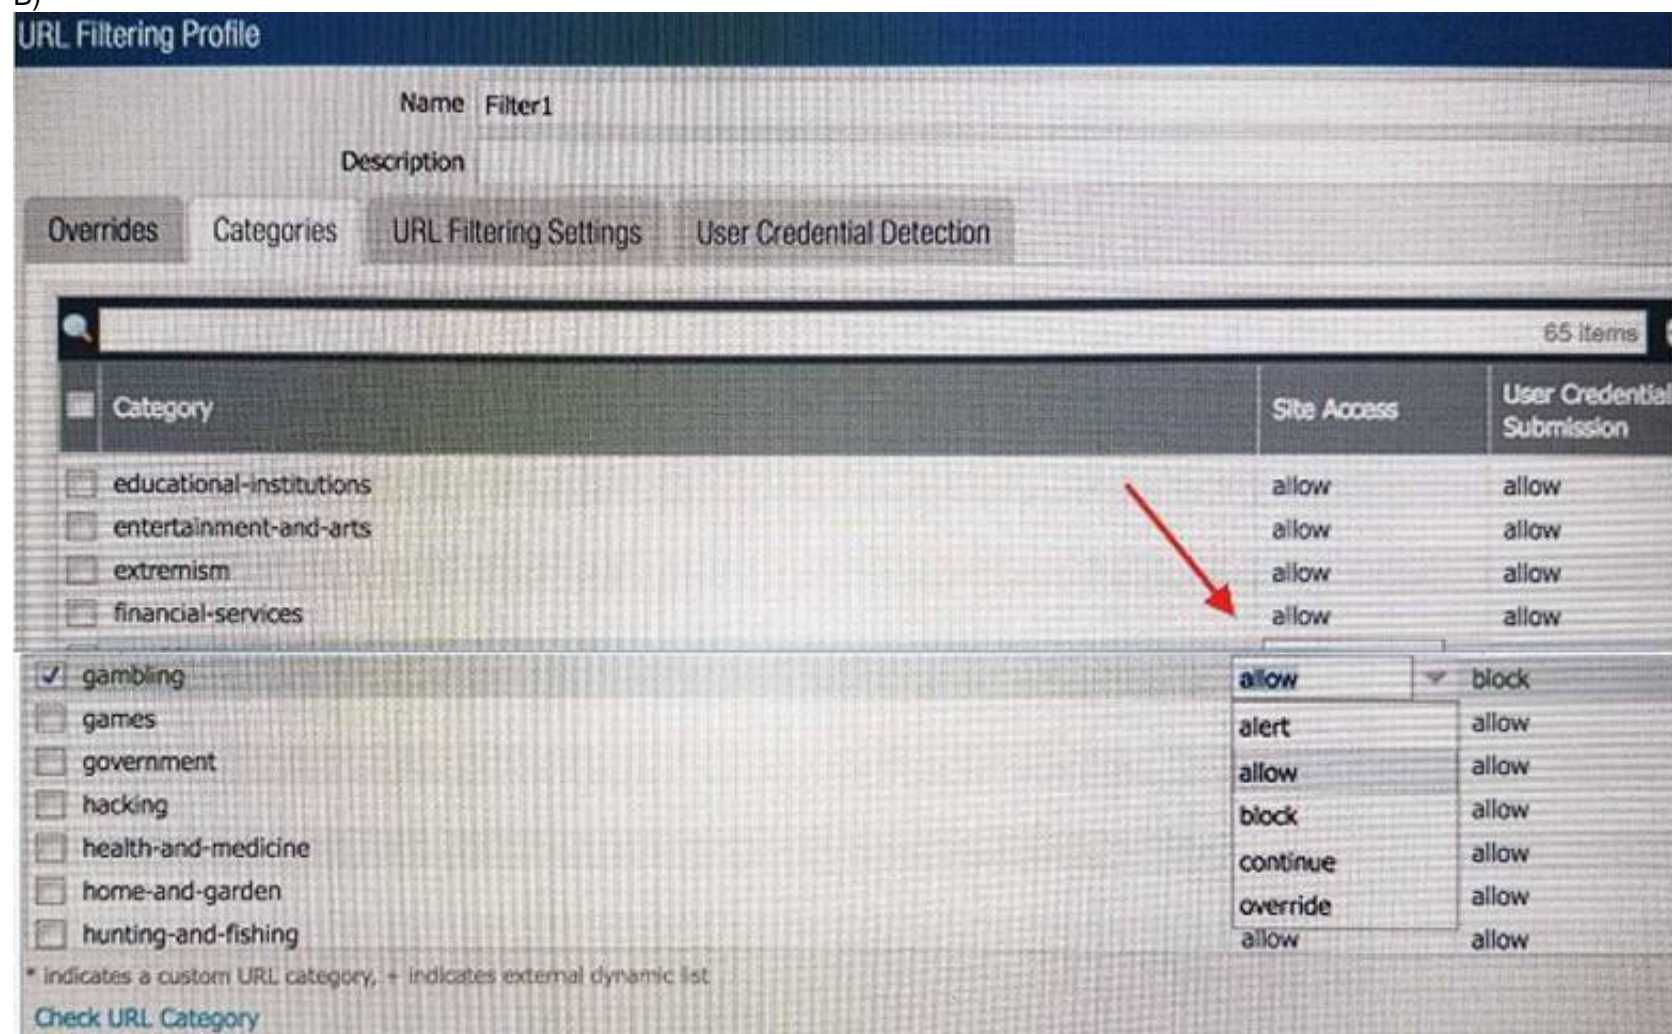

C)

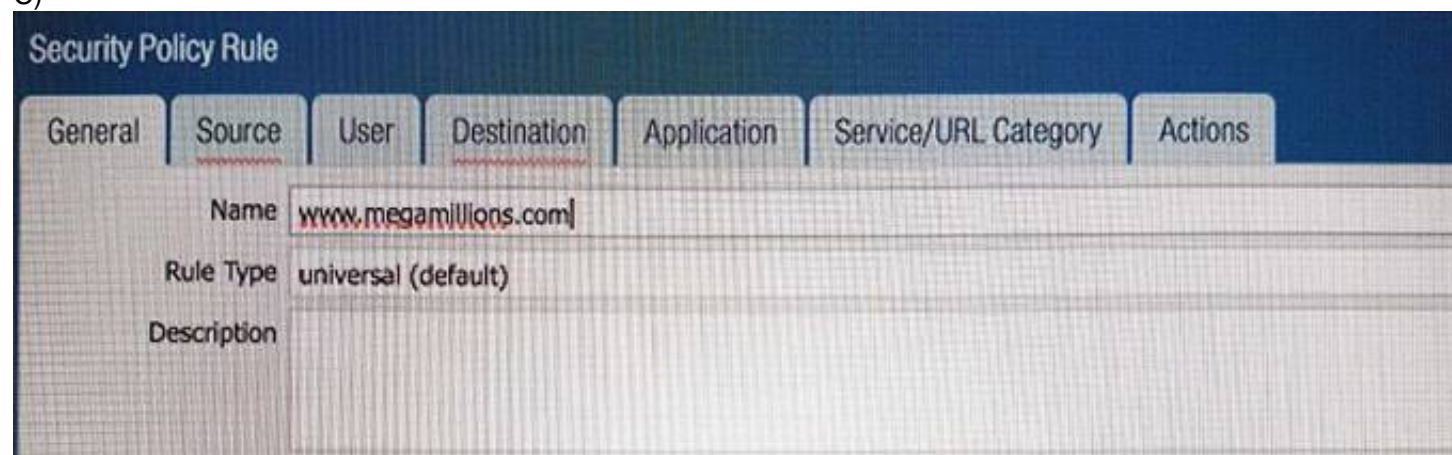

D)

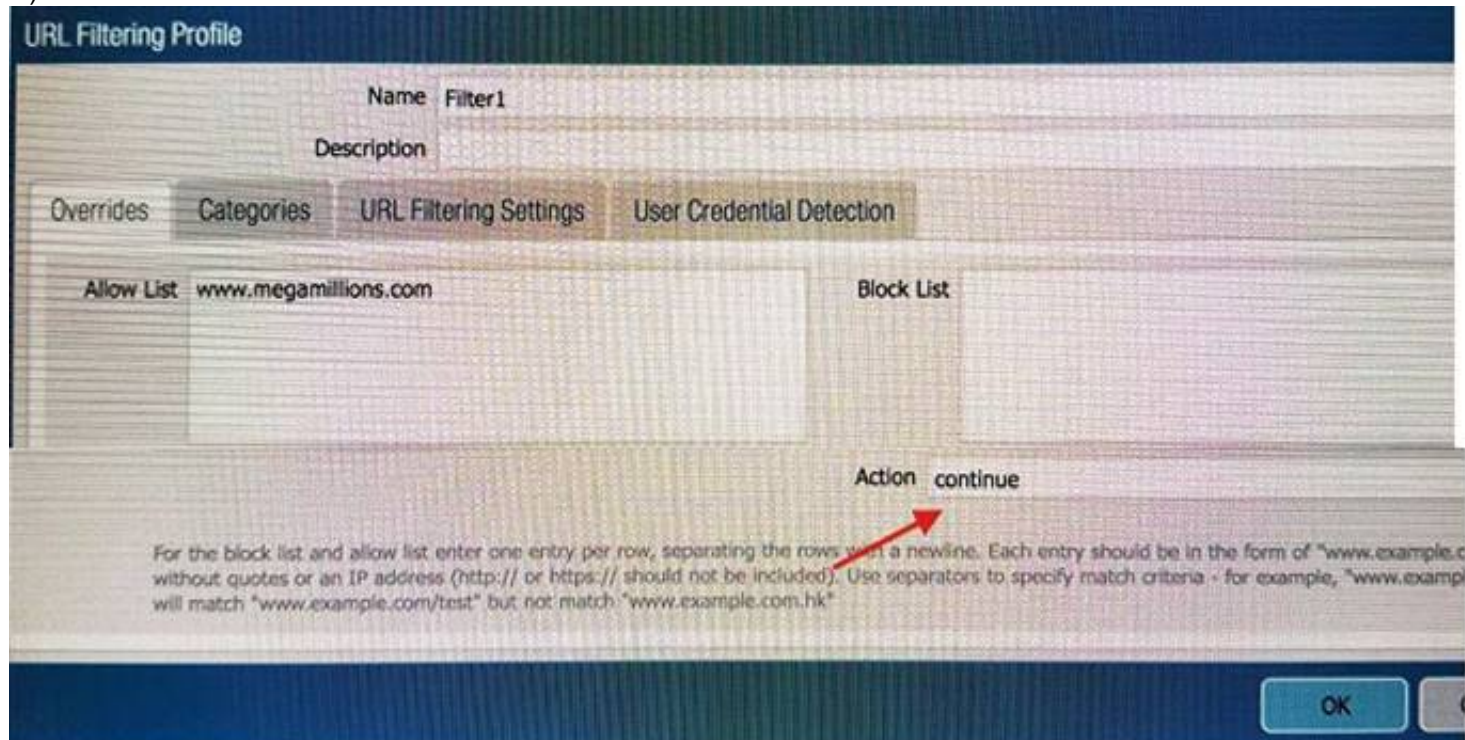

URL Filtering Profile

Name: Filter1

Description:

Overrides: Categories URL Filtering Settings User Credential Detection

Allow List: www.megamillions.com


Block List:

Action: continue

For the block list and allow list enter one entry per row, separating the rows with a newline. Each entry should be in the form of "www.example.com" without quotes or an IP address (http:// or https:// should not be included). Use separators to specify match criteria - for example, "www.example.com/test" will match "www.example.com/test" but not match "www.example.com.hk"

OK

E)

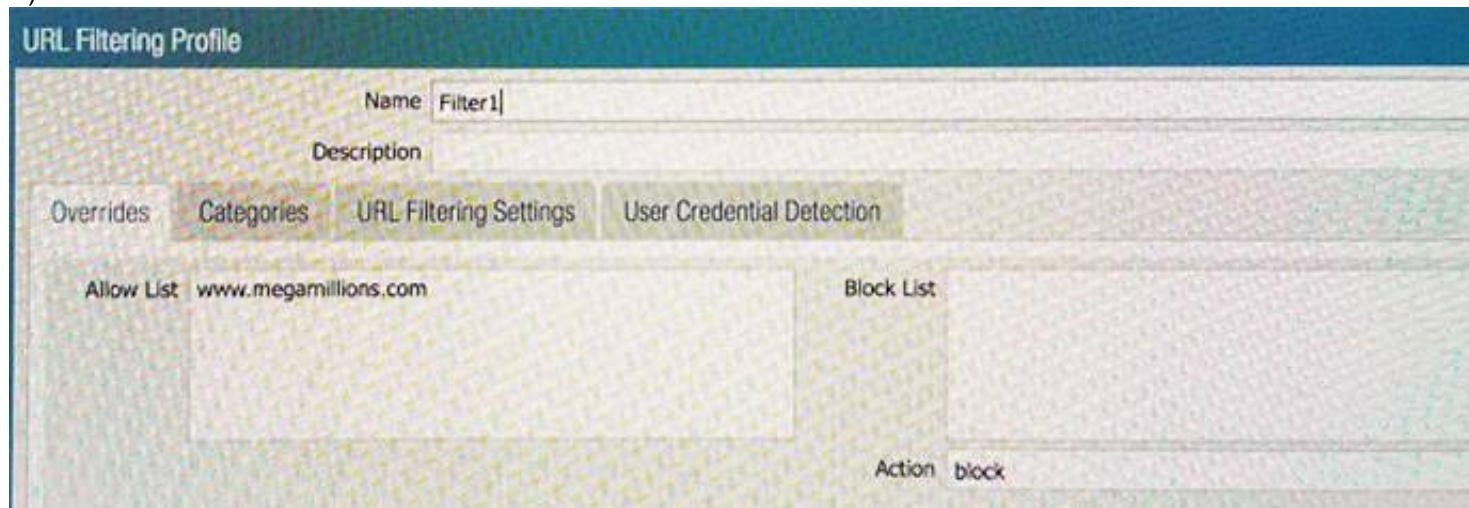

URL Filtering Profile

Name: Filter1

Description:

Overrides: Categories URL Filtering Settings User Credential Detection

Allow List: www.megamillions.com

Block List:

Action: block

- A. Option A
- B. Option B
- C. Option C
- D. Option D
- E. Option E

Answer: B

NEW QUESTION 42

VPN traffic intended for an administrator's Palo Alto Networks NGFW is being maliciously intercepted and retransmitted by the interceptor. When creating a VPN tunnel, which protection profile can be enabled to prevent this malicious behavior?

- A. Zone Protection
- B. DoS Protection
- C. Web Application
- D. Replay

Answer: A

NEW QUESTION 44

An administrator creates a custom application containing Layer 7 signatures. The latest application and threat dynamic update is downloaded to the same NGFW. The update contains an application that matches the same traffic signatures as the custom application. Which application should be used to identify traffic traversing the NGFW?

- A. Custom application
- B. System logs show an application error and neither signature is used.
- C. Downloaded application
- D. Custom and downloaded application signature files are merged and both are used

Answer: A

NEW QUESTION 48

Which three file types can be forwarded to WildFire for analysis as a part of the basic WildFire service? (Choose three.)

- A. dll
- B. exe
- C. src
- D. apk
- E. pdf

F. jar

Answer: DEF

Explanation:

Reference: https://www.paloaltonetworks.com/documentation/80/wildfire/wf_admin/wildfire-overview/wildfire-file-type-support

NEW QUESTION 51

Which event will happen if an administrator uses an Application Override Policy?

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Reference: <https://live.paloaltonetworks.com/t5/Learning-Articles/Tips-and-Tricks-How-to-Create-an-Application-Override/ta-p/65513>

NEW QUESTION 53

Which Security policy rule will allow an admin to block facebook chat but allow Facebook in general?

- A. Deny application facebook-chat before allowing application facebook
- B. Deny application facebook on top
- C. Allow application facebook on top
- D. Allow application facebook before denying application facebook-chat

Answer: A

Explanation:

Reference: <https://live.paloaltonetworks.com/t5/Configuration-Articles/Failed-to-Block-Facebook-Chat-Consistently/ta-p/115673>

NEW QUESTION 57

An administrator needs to upgrade a Palo Alto Networks NGFW to the most current version of PAN- OS® software. The firewall has internet connectivity through an Ethernet interface, but no internet connectivity from the management interface. The Security policy has the default security rules and a rule that allows all web-browsing traffic from any to any zone. What must the administrator configure so that the PAN-OS® software can be upgraded?

- A. Security policy rule
- B. CRL
- C. Service route
- D. Scheduler

Answer: A

NEW QUESTION 61

Which feature prevents the submission of corporate login information into website forms?

- A. Data filtering
- B. User-ID
- C. File blocking
- D. Credential phishing prevention

Answer: D

Explanation:

Reference: <https://www.paloaltonetworks.com/cyberpedia/how-the-next-generation-security-platform-contributes-to-gdpr-compliance>

NEW QUESTION 66

In a virtual router, which object contains all potential routes?

- A. MIB
- B. RIB
- C. SIP
- D. FIB

Answer: B

Explanation:

Reference: https://www.google.com/url?sa=t&rct=j&q=&esrc=s&source=web&cd=10&ved=0ahUKEwiOkbfYzPzXAhVnEJoKHcwVCg4QFghiMAk&url=https%3A%2F%2Flive.paloaltonetworks.com%2Ftwzvq79624%2Fattachments%2Ftwzvq79624%2Fdocumentation_tkb%2F487%2F1%2FRoute%2520Redistribution%2520and%2520Filtering%2520TechNote%2520-%2520Rev%2520B.pdf&usg=AOvVaw0H9qgaJK0oI2xjIJBNo1Km

NEW QUESTION 67

An administrator creates an SSL decryption rule decrypting traffic on all ports. The administrator also creates a Security policy rule allowing only the applications DNS, SSL, and web-browsing.

The administrator generates three encrypted BitTorrent connections and checks the Traffic logs. There are three entries. The first entry shows traffic dropped as application Unknown. The next two entries show traffic allowed as application SSL.

Which action will stop the second and subsequent encrypted BitTorrent connections from being allowed as SSL?

- A. Create a decryption rule matching the encrypted BitTorrent traffic with action “No-Decrypt,” and place the rule at the top of the Decryption policy.
- B. Create a Security policy rule that matches application “encrypted BitTorrent” and place the rule at the top of the Security policy.
- C. Disable the exclude cache option for the firewall.
- D. Create a Decryption Profile to block traffic using unsupported cyphers, and attach the profile to the decryption rule.

Answer: D

NEW QUESTION 69

Which protection feature is available only in a Zone Protection Profile?

- A. SYN Flood Protection using SYN Flood Cookies
- B. ICMP Flood Protection
- C. Port Scan Protection
- D. UDP Flood Protections

Answer: A

NEW QUESTION 70

Which CLI command enables an administrator to view details about the firewall including uptime, PAN-OS® version, and serial number?

- A. debug system details
- B. show session info
- C. show system info
- D. show system details

Answer: C

Explanation:

Reference: https://www.paloaltonetworks.com/content/dam/pan/en_US/assets/pdf/technical-documentation/pan-os-60/PAN-OS-6.0-CLI-ref.pdf

NEW QUESTION 73

Which tool provides an administrator the ability to see trends in traffic over periods of time, such as threats detected in the last 30 days?

- A. Session Browser
- B. Application Command Center
- C. TCP Dump
- D. Packet Capture

Answer: B

Explanation:

Reference: <https://live.paloaltonetworks.com/t5/Management-Articles/Tips-and-Tricks-How-to-Use-the-Application-Command-Center-ACC/ta-p/67342>

NEW QUESTION 74

Which three steps will reduce the CPU utilization on the management plane? (Choose three.)

- A. Disable SNMP on the management interface.
- B. Application override of SSL application.
- C. Disable logging at session start in Security policies.
- D. Disable predefined reports.
- E. Reduce the traffic being decrypted by the firewall.

Answer: CDE

NEW QUESTION 75

Which feature must you configure to prevent users from accidentally submitting their corporate credentials to a phishing website?

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/80/pan-os/pan-os/threat-prevention/prevent-credential-phishing>

NEW QUESTION 78

How can a candidate or running configuration be copied to a host external from Panorama?

- A. Commit a running configuration.
- B. Save a configuration snapshot.
- C. Save a candidate configuration.
- D. Export a named configuration snapshot.

Answer: D

Explanation:

Reference:

https://www.paloaltonetworks.com/documentation/71/panorama/panorama_adminguide/administer-panorama/back-up-panorama-and-firewall-configurations

NEW QUESTION 82

An administrator sees several inbound sessions identified as unknown-tcp in the Traffic logs. The administrator determines that these sessions are from external users accessing the company's proprietary accounting application. The administrator wants to reliably identify this traffic as their accounting application and to scan this traffic for threats.

Which option would achieve this result?

- A. Create a custom App-ID and enable scanning on the advanced tab.
- B. Create an Application Override policy.
- C. Create a custom App-ID and use the "ordered conditions" check box.
- D. Create an Application Override policy and custom threat signature for the application.

Answer: A

NEW QUESTION 86

Which three firewall states are valid? (Choose three.)

- A. Active
- B. Functional
- C. Pending
- D. Passive
- E. Suspended

Answer: ADE

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/71/pan-os/pan-os/high-availability/ha-firewall-states>

NEW QUESTION 87

An administrator has a requirement to export decrypted traffic from the Palo Alto Networks NGFW to a third-party, deep-level packet inspection appliance.

Which interface type and license feature are necessary to meet the requirement?

- A. Decryption Mirror interface with the Threat Analysis license
- B. Virtual Wire interface with the Decryption Port Export license
- C. Tap interface with the Decryption Port Mirror license
- D. Decryption Mirror interface with the associated Decryption Port Mirror license

Answer: D

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/71/pan-os/pan-os/decryption/decryption-mirroring>

NEW QUESTION 88

When is the content inspection performed in the packet flow process?

- A. after the application has been identified
- B. before session lookup
- C. before the packet forwarding process
- D. after the SSL Proxy re-encrypts the packet

Answer: A

Explanation:

Reference:

<https://live.paloaltonetworks.com/t5/Learning-Articles/Packet-Flow-Sequence-in-PAN-OS/ta-p/56081>

NEW QUESTION 90

An administrator has been asked to configure a Palo Alto Networks NGFW to provide protection against external hosts attempting to exploit a flaw in an operating system on an internal system. Which Security Profile type will prevent this attack?

- A. Vulnerability Protection
- B. Anti-Spyware
- C. URL Filtering
- D. Antivirus

Answer: A

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/71/pan-os/web-interface-help/objects/objects-security-profiles-vulnerability-protection>

NEW QUESTION 91

Which processing order will be enabled when a Panorama administrator selects the setting "Objects defined in ancestors will take higher precedence?"

- A. Descendant objects will take precedence over other descendant objects.
- B. Descendant objects will take precedence over ancestor objects.
- C. Ancestor objects will have precedence over descendant objects.
- D. Ancestor objects will have precedence over other ancestor objects.

Answer: C

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/71/pan-os/web-interface-help/device/device-setup-management>

NEW QUESTION 95

An administrator using an enterprise PKI needs to establish a unique chain of trust to ensure mutual authentication between Panorama and the managed firewalls and Log Collectors.

How would the administrator establish the chain of trust?

- A. Use custom certificates
- B. Enable LDAP or RADIUS integration
- C. Set up multi-factor authentication
- D. Configure strong password authentication

Answer: A

Explanation:

Reference:

https://www.paloaltonetworks.com/documentation/80/panorama/panorama_adminguide/panorama-overview/plan-your-panorama-deployment

NEW QUESTION 98

Exhibit:

```
#####
```

```
admin@Lab33-111-PA-3060(active)>show routing fib
```

id	destination	nexthop	flags	interface	mtu
47	0.0.0.0/0	10.46.40.1	ug	ethernet1/3	1500
46	10.46.40.0/23	0.0.0.0	u	ethernet1/3	1500
45	10.46.41.111/32	0.0.0.0	uh	ethernet1/3	1500
70	10.46.41.113/32	10.46.40.1	ug	ethernet1/3	1500
51	192.168.111.0/24	0.0.0.0	u	ethernet1/6	1500
50	192.168.111.2/32	0.0.0.0	uh	ethernet1/6	1500

```
#####
```

```
admin@Lab33-111-PA-3060(active)>show virtual-wire all
```

```
total virtual-wire shown:
```

```
flags: m-multicast firewalling
       p= link state pass-through
       s- vlan sub-interface
       i- ip+vlan sub-interface
       t-tenant sub-interface
```

name	interface1	interface2	flags	allowed-tags
VW-1	ethernet1/7	ethernet1/5	p	

```
#####
```

What will be the egress interface if the traffic's ingress interface is ethernet1/6 sourcing from 192.168.111.3 and to the destination 10.46.41.113 during the time shown in the image?

- A. ethernet1/7
- B. ethernet1/5
- C. ethernet1/6
- D. ethernet1/3

Answer: D

NEW QUESTION 102

Which two options prevent the firewall from capturing traffic passing through it? (Choose two.)

- A. The firewall is in multi-vsyt mode.

- B. The traffic is offloaded.
- C. The traffic does not match the packet capture filter.
- D. The firewall's DP CPU is higher than 50%.

Answer: BC

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/80/pan-os/pan-os/monitoring/take-packet-captures/disable-hardware-offload>

NEW QUESTION 103

Which two benefits come from assigning a Decryption Profile to a Decryption policy rule with a "No Decrypt" action? (Choose two.)

- A. Block sessions with expired certificates
- B. Block sessions with client authentication
- C. Block sessions with unsupported cipher suites
- D. Block sessions with untrusted issuers
- E. Block credential phishing

Answer: ABC

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/71/pan-os/pan-os/decryption/create-a-decryption-profile>

NEW QUESTION 105

Which feature can be configured on VM-Series firewalls?

- A. aggregate interfaces
- B. machine learning
- C. multiple virtual systems
- D. GlobalProtect

Answer: D

NEW QUESTION 106

In High Availability, which information is transferred via the HA data link?

- A. session information
- B. heartbeats
- C. HA state information
- D. User-ID information

Answer: A

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/71/pan-os/pan-os/high-availability/ha-links-and-backup-links>

NEW QUESTION 107

Which CLI command enables an administrator to check the CPU utilization of the dataplane?

- A. show running resource-monitor
- B. debug data-plane dp-cpu
- C. show system resources
- D. debug running resources

Answer: A

NEW QUESTION 108

Which two subscriptions are available when configuring panorama to push dynamic updates to connected devices? (Choose two.)

- A. Content-ID
- B. User-ID
- C. Applications and Threats
- D. Antivirus


Answer: CD

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/71/pan-os/web-interface-help/device/device-dynamic-updates>

NEW QUESTION 113

View the GlobalProtect configuration screen capture.

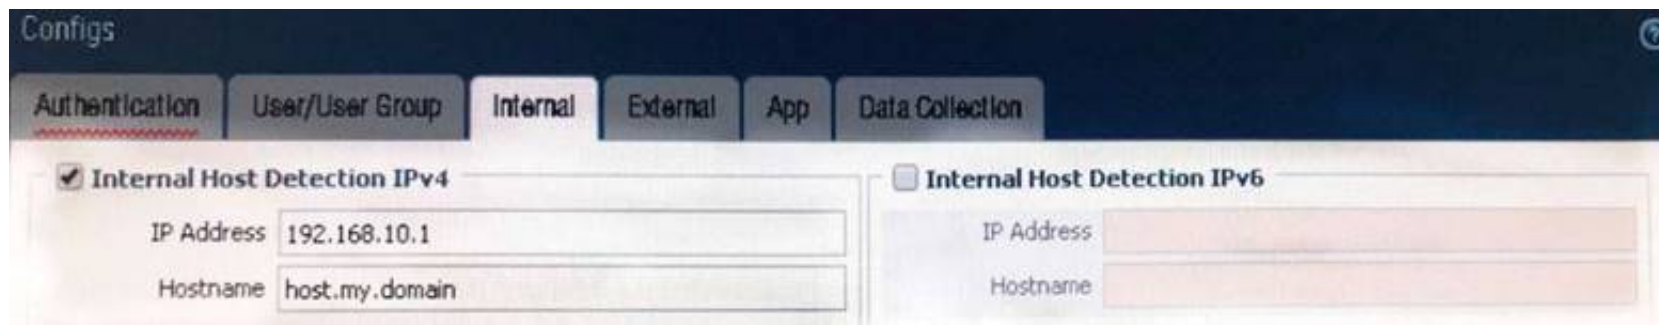

What is the purpose of this configuration?

- A. It configures the tunnel address of all internal clients to an IP address range starting at 192.168.10.1.
- B. It forces an internal client to connect to an internal gateway at IP address 192.168.10.1.
- C. It enables a client to perform a reverse DNS lookup on 192.168.10.1 to detect that it is an internal client.
- D. It forces the firewall to perform a dynamic DNS update, which adds the internal gateway's hostname and IP address to the DNS server.

Answer: C

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/80/globalprotect/globalprotect-admin-guide/globalprotect-portals/define-the-globalprotect-client-authentication-configurations/define-the-globalprotect-agent-configurations>

NEW QUESTION 117

Which three user authentication services can be modified to provide the Palo Alto Networks NGFW with both usernames and role names? (Choose three.)

- A. TACACS+
- B. Kerberos
- C. PAP
- D. LDAP
- E. SAML
- F. RADIUS

Answer: ADF

NEW QUESTION 120

Which prerequisite must be satisfied before creating an SSH proxy Decryption policy?

- A. Both SSH keys and SSL certificates must be generated.
- B. No prerequisites are required.
- C. SSH keys must be manually generated.
- D. SSL certificates must be generated.

Answer: B

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/71/pan-os/pan-os/decryption/configure-ssh-proxy>

NEW QUESTION 122

A customer wants to combine multiple Ethernet interfaces into a single virtual interface using link aggregation. Which two formats are correct for naming aggregate interfaces? (Choose two.)

- A. ae.8
- B. aggregate.1
- C. ae.1
- D. aggregate.8

Answer: AC

NEW QUESTION 123

Which three authentication factors does PAN-OS® software support for MFA (Choose three.)

- A. Push
- B. Pull
- C. Okta Adaptive
- D. Voice E.SMS

Answer: ADE

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/80/pan-os/pan-os/authentication/configure-multi-factor-authentication>

NEW QUESTION 128

For which two reasons would a firewall discard a packet as part of the packet flow sequence? (Choose two)

- A. equal-cost multipath
- B. ingress processing errors
- C. rule match with action "allow"

D. rule match with action "deny"

Answer: BD

NEW QUESTION 129

A company wants to install a PA-3060 firewall between two core switches on a VLAN trunk link. They need to assign each VLAN to its own zone and to assign untagged (native) traffic to its own zone which options differentiates multiple VLAN into separate zones?

- A. Create VLAN objects for each VLAN and assign VLAN interfaces matching each VLAN I
- B. Repeat foreverly additional VLAN and use a VLAN ID of 0 for untagged traffi
- C. Assign each interface/subinterface to a unique zone.
- D. Create V-Wire objects with two V-Wire sub interface and assign only a single VLAN ID to the "Tag Allowed field one of the V-Wire object Repeat for every additional VLAN and use a VIAN ID of 0 for untagged traffi
- E. Assign each interface/subinterfaceto a unique zone.
- F. Create V-Wire objects with two V-Wire interfaces and define a range "0- 4096" in the "Tag Allowed filed of the V-Wire object.
- G. Create Layer 3 sub interfaces that are each assigned to a single VLAN ID and a common virtual route
- H. The physical Layer 3interface would handle untagged traffi
- I. Assign each interface /subinterface to a unique zon
- J. Do not assign any interface anIP address

Answer: C

NEW QUESTION 133

Which data flow describes redistribution of user mappings?

- A. User-ID agent to firewall
- B. firewall to firewall
- C. Domain Controller to User-ID agent
- D. User-ID agent to Panorama

Answer: B

NEW QUESTION 138

Which four NGFW multi-factor authentication factors are supported by PAN-OSS? (Choose four.)

- A. User logon
- B. Short message service
- C. Push
- D. SSH keyE.One-Time Password F.Voice

Answer: BCEF

NEW QUESTION 141

Which log file can be used to identify SSL decryption failures?

- A. Configuration
- B. Threats
- C. ACC
- D. Traffic

Answer: C

NEW QUESTION 146

An administrator needs to upgrade an NGFW to the most current version of PAN-OS® software. The following is occurring:

- Firewall has Internet connectivity through e1/1.
- Default security rules and security rules allowing all SSL and web-browsing traffic to and from any zone.
- Service route is configured, sourcing update traffic from e1/1.
- A communication error appears in the System logs when updates are performed.
- Download does not complete.

What must be configured to enable the firewall to download the current version of PAN-OS software?

- A. DNS settings for the firewall to use for resolution
- B. scheduler for timed downloads of PAN-OS software
- C. static route pointing application PaloAlto-updates to the update servers
- D. Security policy rule allowing PaloAlto-updates as the application

Answer: D

NEW QUESTION 149

An administrator wants a new Palo Alto Networks NGFW to obtain automatic application updates daily, so it is configured to use a scheduler for the application database. Unfortunately, they required the management network to be isolated so that it cannot reach the internet. Which configuration will enable the firewall to download and install application updates automatically?

- A. Configure a Policy Based Forwarding policy rule for the update server IP address so that traffic sourced from themanagement interfaced destined for the update servers goes out of the interface acting as your internet connection.
- B. Configure a security policy rule to allow all traffic to and from the update servers.
- C. Download and install application updates cannot be done automatically if the MGT port cannot reach the internet.

D. Configure a service route for Palo Alto networks services that uses a dataplane interface that can route traffic to the internet, and create a security policy rule to allow the traffic from that interface to the update servers if necessary.

Answer: B

NEW QUESTION 150

Which three firewall states are valid? (Choose three)

- A. Suspended
- B. Passive
- C. Active
- D. Pending E.Functional

Answer: ABC

NEW QUESTION 154

Which is the maximum number of samples that can be submitted to WildFire per day, based on wildfire subscription?

- A. 15,000
- B. 10,000
- C. 75,00
- D. 5,000

Answer: B

NEW QUESTION 158

An administrator has configured a QoS policy rule and a QoS profile that limits the maximum allowable bandwidth for the YouTube application. However , YouTube is consuming more than the maximum bandwidth allotment configured.

Which configuration step needs to be configured to enable QoS?

- A. Enable QoS Data Filtering Profile
- B. Enable QoS monitor
- C. Enable Qos interface
- D. Enable Qos in the interface Management Profile.

Answer: C

NEW QUESTION 163

When configuring the firewall for packet capture, what are the valid stage types?

- A. Receive, management , transmit , and drop
- B. Receive , firewall, send , and non-syn
- C. Receive management , transmit, and non-syn
- D. Receive , firewall, transmit, and drop

Answer: D

NEW QUESTION 168

Which feature can provide NGFWs with User-ID mapping information?

- A. GlobalProtect
- B. Web Captcha
- C. Native 802.1q authentication
- D. Native 802.1x authentication

Answer: A

NEW QUESTION 169

Which GlobalProtect Client connect method requires the distribution and use of machine certificates?

- A. User-logon (Always on)
- B. At-boot
- C. On-demand
- D. Pre-logon

Answer: D

NEW QUESTION 174

Where can an administrator see both the management plane and data plane CPU utilization in the WebUI?

- A. System log
- B. CPU Utilization widget
- C. Resources widget
- D. System Utilization log

Answer: C

NEW QUESTION 175

Which option enables a Palo Alto Networks NGFW administrator to schedule Application and Threat updates while applying only new content-IDs to traffic?

- A. Select download-and-install.
- B. Select download-and-install, with "Disable new apps in content update" selected.
- C. Select download-only.
- D. Select disable application updates and select "Install only Threat updates"

Answer: C

NEW QUESTION 180


Which two settings can be configured only locally on the firewall and not pushed from a Panorama template or template stack? (Choose two)

- A. HA1 IP Address
- B. Network Interface Type
- C. Master Key
- D. Zone Protection Profile

Answer: AB

NEW QUESTION 185

Based on the following image,

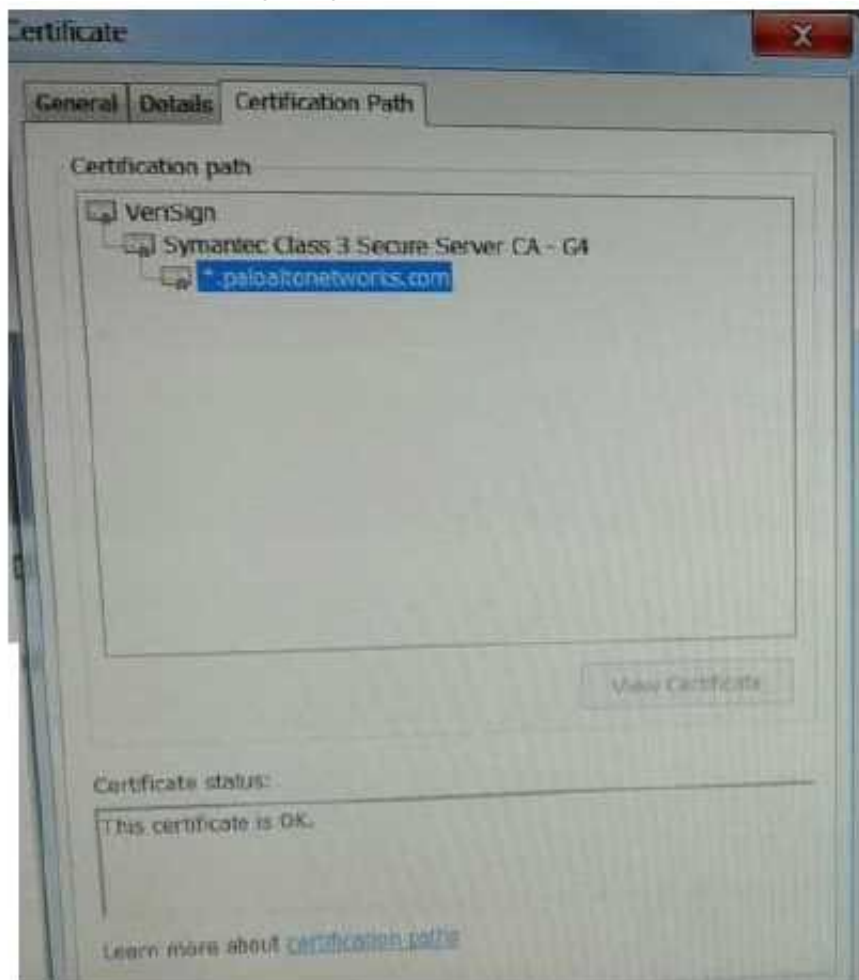

what is the correct path of root, intermediate, and end-user certificate?

- A. Palo Alto Networks > Symantec > VeriSign
- B. Symantec > VeriSign > Palo Alto Networks
- C. VeriSign > Palo Alto Networks > Symantec
- D. VeriSign > Symantec > Palo Alto Networks

Answer: D

NEW QUESTION 188

Which Zone Pair and Rule Type will allow a successful connection for a user on the internet zone to a web server hosted in the DMZ zone? The web server is reachable using a destination Nat policy in the Palo Alto Networks firewall.

- A. Zone Pair:Source Zone: Internet Destination Zone: DMZ Rule Type:"intrazone"
- B. Zone Pair:Source Zone: Internet Destination Zone: DMZ Rule Type:"intrazone" or "universal"
- C. Zone Pair:Source Zone: Internet Destination Zone: Internet Rule Type:"intrazone" or "universal"
- D. Zone Pair:Source Zone: Internet Destination Zone: Internet Rule Type:"intrazone"

Answer: B

NEW QUESTION 193

A host attached to Ethernet 1/4 cannot ping the default gateway. The widget on the dashboard shows Ethernet 1/1 and Ethernet 1/4 to be green. The IP address of Ethernet 1/1 is 192.168.1.7 and the IP address of Ethernet 1/4 is 10.1.1.7. The default gateway is attached to Ethernet 1/1. A default route is properly configured. What can be the cause of this problem?

- A. No Zone has been configured on Ethernet 1/4.
- B. Interface Ethernet 1/1 is in Virtual Wire Mode.
- C. DNS has not been properly configured on the firewall.
- D. DNS has not been properly configured on the host.

Answer: A

NEW QUESTION 194

Site-A and Site-B have a site-to-site VPN set up between them. OSPF is configured to dynamically create the routes between the sites. The OSPF configuration in Site-A is configured properly, but the route for the tunnel is not being established. The Site-B interfaces in the graphic are using a broadcast Link Type. The administrator has determined that the OSPF configuration in Site-B is using the wrong Link Type for one of its interfaces.

Virtual Router - OSPF - Area						
Area ID		0.0.0.0				
Type	Range	Interface	Virtual Link			
<input type="checkbox"/>	Interface	Enable	Passive	Link Type	Metric	Priority
<input type="checkbox"/>	tunnel.10	<input checked="" type="checkbox"/>	<input type="checkbox"/>	broadcast	10	1
<input type="checkbox"/>	ethernet1/21	<input checked="" type="checkbox"/>	<input type="checkbox"/>	broadcast	10	1

Which Link Type setting will correct the error?

- A. Set tunnel to p2p
- B. Set tunnel to p2mp
- C. Set Ethernet 1/1 to p2p
- D. Set Ethernet 1/1 to p2mp
- E. Set Ethernet 1/1 to p2p
- F. Set Ethernet 1/1 to p2mp

Answer: A

NEW QUESTION 196

A VPN connection is set up between Site-A and Site-B, but no traffic is passing in the system log of Site-A, there is an event logged as like-nego-p1-fail-psk. What action will bring the VPN up and allow traffic to start passing between the sites?

- A. Change the Site-B IKE Gateway profile version to match Site-A.
- B. Change the Site-A IKE Gateway profile exchange mode to aggressive mode.
- C. Enable NAT Traversal on the Site-A IKE Gateway profile.
- D. Change the pre-shared key of Site-B to match the pre-shared key of Site-A

Answer: D

NEW QUESTION 199

A company is upgrading its existing Palo Alto Networks firewall from version 7.0.1 to 7.0.4.

Which three methods can the firewall administrator use to install PAN-OS 8.0.4 across the enterprise?(Choose three)

- A. Download PAN-OS 8.0.4 files from the support site and install them on each firewall after manually uploading.
- B. Download PAN-OS 8.0.4 to a USB drive and the firewall will automatically update after the USB drive is inserted in the firewall.
- C. Push the PAN-OS 8.0.4 updates from the support site to install on each firewall.
- D. Push the PAN-OS 8.0.4 update from one firewall to all of the other remaining after updating one firewall.
- E. Download and install PAN-OS 8.0.4 directly on each firewall.
- F. Download and push PAN-OS 8.0.4 from Panorama to each firewall.

Answer: ACF

NEW QUESTION 202

Which three fields can be included in a pcap filter? (Choose three)

- A. Egress interface
- B. Source IP
- C. Rule number
- D. Destination IP
- E. Ingress interface

Answer: BCD

Explanation:

(<https://live.paloaltonetworks.com/t5/Featured-Articles/Getting-Started-Packet-Capture/ta-p/72069>)

NEW QUESTION 203

A network engineer has revived a report of problems reaching 98.139.183.24 through vr1 on the firewall. The routing table on this firewall is extensive and complex.

Which CLI command will help identify the issue?

- A. test routing fib virtual-router vr1
- B. show routing route type static destination 98.139.183.24
- C. test routing fib-lookup ip 98.139.183.24 virtual-router vr1
- D. show routing interface

Answer: C

NEW QUESTION 208

A network Administrator needs to view the default action for a specific spyware signature. The administrator follows the tabs and menus through Objects> Security Profiles> Anti-Spyware and select default profile.

What should be done next?

- A. Click the simple-critical rule and then click the Action drop-down list.
- B. Click the Exceptions tab and then click show all signatures.
- C. View the default actions displayed in the Action column.
- D. Click the Rules tab and then look for rules with "default" in the Action column.

Answer: B

NEW QUESTION 212


Which two mechanisms help prevent a spilt brain scenario an Active/Passive High Availability (HA) pair? (Choose two)

- A. Configure the management interface as HA3 Backup
- B. Configure Ethernet 1/1 as HA1 Backup
- C. Configure Ethernet 1/1 as HA2 Backup
- D. Configure the management interface as HA2 Backup
- E. Configure the management interface as HA1 Backup
- F. Configure ethernet1/1 as HA3 Backup

Answer: BE

NEW QUESTION 213

Click the Exhibit button

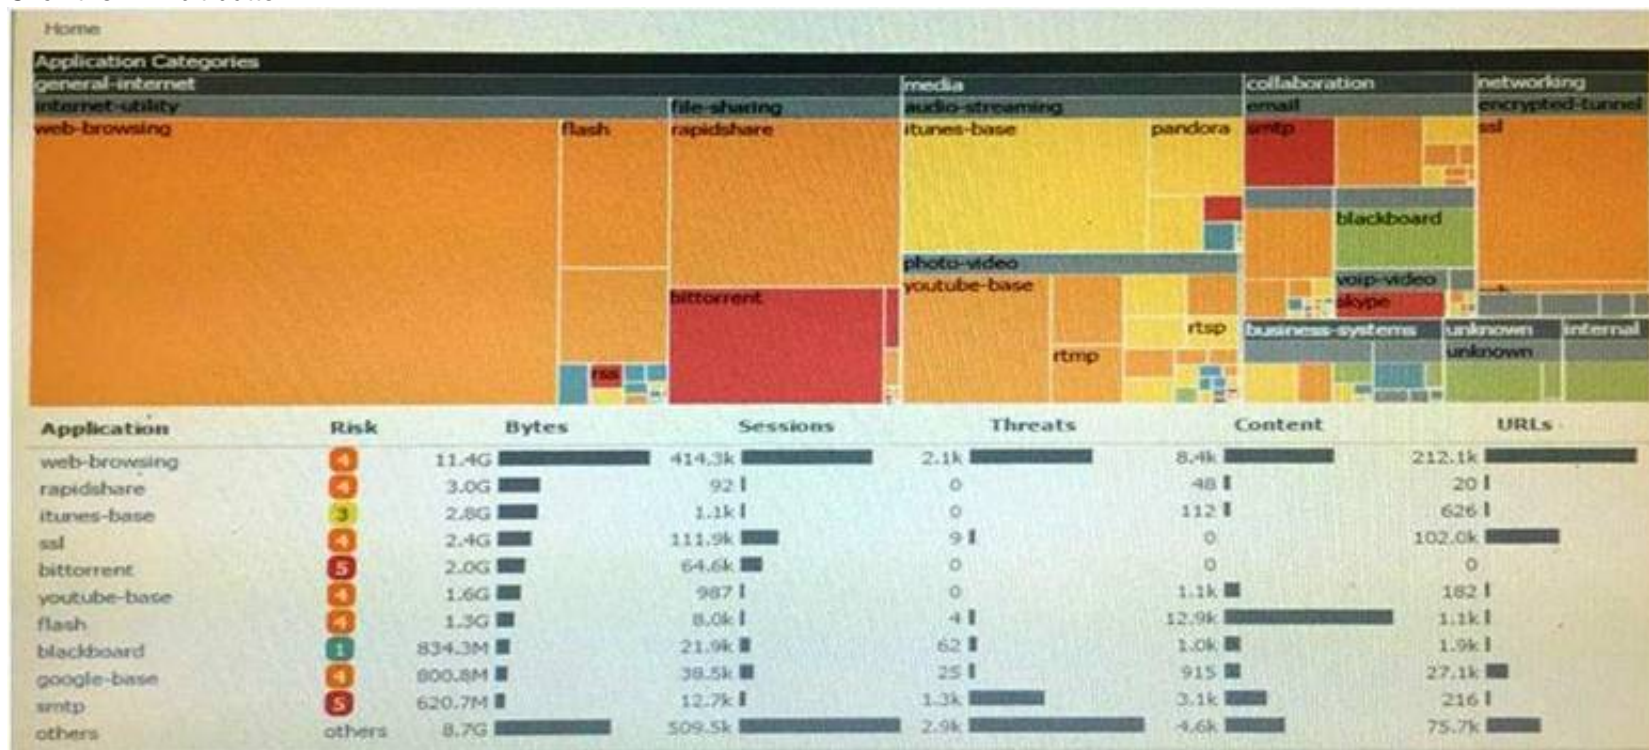

An administrator has noticed a large increase in bittorrent activity. The administrator wants to determine where the traffic is going on the company. What would be the administrator's next step?

- A. Right-Click on the bittorrent link and select Value from the context menu
- B. Create a global filter for bittorrent traffic and then view Traffic logs.
- C. Create local filter for bittorrent traffic and then view Traffic logs.
- D. Click on the bittorrent application link to view network activity

Answer: D

NEW QUESTION 218

Which command can be used to validate a Captive Portal policy?

- A. eval captive-portal policy <criteria>
- B. request cp-policy-eval <criteria>
- C. test cp-policy-match <criteria>
- D. debug cp-policy <criteria>

Answer: C

NEW QUESTION 220

What are three valid actions in a File Blocking Profile? (Choose three)

- A. Forward
- B. Block
- C. Alert
- D. Upload
- E. Reset-both
- F. Continue

Answer: ABC

Explanation:

<https://live.paloaltonetworks.com/t5/Configuration-Articles/File-Blocking-Rulebase-and-Action-Precedence/ta-p/53623>
<https://live.paloaltonetworks.com/t5/Configuration-Articles/File-Blocking-Rulebase-and-Action-Precedence/ta-p/53623>
<https://live.paloaltonetworks.com/t5/Configuration-Articles/File-Blocking-Rulebase-and-Action-Precedence/ta-p/53623>

NEW QUESTION 223

A company has a pair of Palo Alto Networks firewalls configured as an Active/Passive High Availability (HA) pair. What allows the firewall administrator to determine the last date a failover event occurred?

- A. From the CLI issue use the show System log
- B. Apply the filter subtype eq ha to the System log
- C. Apply the filter subtype eq ha to the configuration log
- D. Check the status of the High Availability widget on the Dashboard of the GUI

Answer: B

NEW QUESTION 225

The company's Panorama server (IP 10.10.10.5) is not able to manage a firewall that was recently deployed. The firewall's dedicated management port is being used to connect to the management network.

Which two commands may be used to troubleshoot this issue from the CLI of the new firewall? (Choose two)

- A. test panoramas-connect 10.10.10.5
- B. show panoramas-status
- C. show arp all | match 10.10.10.5
- D. topdump filter "host 10.10.10.5
- E. debug dataplane packet-diag set capture on

Answer: BD

NEW QUESTION 229

An Administrator is configuring an IPSec VPN to a Cisco ASA at the administrator's home and experiencing issues completing the connection. The following is the output from the command:

less mp-log ikemgr.log:

```
less mp-log ikemgr.log:
```

```
2014-08-05 03:51:41 [INFO]: IPsec-SA request for 108.81.64.59 queued since no phase1 found
2014-08-05 03:51:41 [PROTO_NOTIFY]: <====> PHASE-1 NEGOTIATION STARTED AS INITIATOR, MAIN MODE <====>
Initiated SA: 69.15.96.53[500]-108.81.64.59[500] cookie:09e85260f28f4e15:0000000000000000 <====>
2014-08-05 03:52:33 [PROTO_NOTIFY]: <====> PHASE-1 NEGOTIATION FAILED AS INITIATOR, MAIN MODE <====>
Initiated SA: 69.15.96.53[500]-108.81.64.59[500] cookie:09e85260f28f4e15:0000000000000000 <====> Due to
timeout.
2014-08-05 03:52:33 [INFO]: <====> PHASE-1 SA DELETED <====>
Deleted SA: 69.15.96.53[500]-108.81.64.59[500] cookie:09e85260f28f4e15:0000000000000000 <====>
2014-08-05 03:53:02 [INFO]: IPsec-SA request for 108.81.64.59 queued since no phase1 found
2014-08-05 03:53:02 [PROTO_NOTIFY]: <====> PHASE-1 NEGOTIATION STARTED AS INITIATOR, MAIN MODE <====>
Initiated SA: 69.15.96.53[500]-108.81.64.59[500] cookie:53351420a9a1aa47:0000000000000000 <====>
2014-08-05 03:53:54 [PROTO_NOTIFY]: <====> PHASE-1 NEGOTIATION FAILED AS INITIATOR, MAIN MODE <====>
Initiated SA: 69.15.96.53[500]-108.81.64.59[500] cookie:53351420a9a1aa47:0000000000000000 <====> Due to
timeout.
2014-08-05 03:53:54 [INFO]: <====> PHASE-1 SA DELETED <====>
```

What could be the cause of this problem?

- A. The public IP addresses do not match for both the Palo Alto Networks Firewall and the ASA.
- B. The Proxy IDs on the Palo Alto Networks Firewall do not match the settings on the ASA.
- C. The shared secrets do not match between the Palo Alto firewall and the ASA
- D. The dead peer detection settings do not match between the Palo Alto Networks Firewall and the ASA

Answer: B

NEW QUESTION 230

Which three options are available when creating a security profile? (Choose three)

- A. Anti-Malware
- B. File Blocking
- C. URL Filtering
- D. IDS/IPS

E. Threat Prevention
F. Antivirus

Answer: ABF

NEW QUESTION 235

Which two methods can be used to mitigate resource exhaustion of an application server? (Choose two)

- A. Vulnerability Object
- B. DoS Protection Profile
- C. Data Filtering Profile
- D. Zone Protection Profile

Answer: BD

NEW QUESTION 239

A Palo Alto Networks firewall is being targeted by an NTP Amplification attack and is being flooded with tens thousands of bogus UDP connections per second to a single destination IP address and port.

Which option when enabled with the correction threshold would mitigate this attack without dropping legitimate traffic to other hosts inside the network?

- A. Zone Protection Policy with UDP Flood Protection
- B. QoS Policy to throttle traffic below maximum limit
- C. Security Policy rule to deny traffic to the IP address and port that is under attack
- D. Classified DoS Protection Policy using destination IP only with a Protect action

Answer: D

NEW QUESTION 244

Which two options are required on an M-100 appliance to configure it as a Log Collector? (Choose two)

- A. From the Panorama tab of the Panorama GUI select Log Collector mode and then commit changes
- B. Enter the command request system system-mode logger then enter Y to confirm the change to Log Collector mode.
- C. From the Device tab of the Panorama GUI select Log Collector mode and then commit changes.
- D. Enter the command logger-mode enable then enter Y to confirm the change to Log Collector mode.
- E. Log in the Panorama CLI of the dedicated Log Collector

Answer: BE

Explanation:

(https://www.paloaltonetworks.com/documentation/60/panorama/panorama_adminguide/set-up-panorama/set-up-the-m-100-appliance)

NEW QUESTION 246

A firewall administrator has completed most of the steps required to provision a standalone Palo Alto Networks Next-Generation Firewall. As a final step, the administrator wants to test one of the security policies.

Which CLI command syntax will display the rule that matches the test?

- A. test security -policy- match source <ip_address> destination <IP_address> destination port <port number> protocol <protocol number>
- B. show security rule source <ip_address> destination <IP_address> destination port <port number> protocol <protocol number>
- C. test security rule source <ip_address> destination <IP_address> destination port <port number> protocol <protocol number>
- D. show security-policy-match source <ip_address> destination <IP_address> destination port <port number> protocol <protocol number> test security-policy-match source

Answer: A

Explanation:

test security-policy-match source <source IP> destination <destination IP> protocol <protocol number>

<https://live.paloaltonetworks.com/t5/Management-Articles/How-to-Test-Which-Security-Policy-Applies-to-a-Traffic-Flow/ta-p/53693>

NEW QUESTION 247

Palo Alto Networks maintains a dynamic database of malicious domains.

Which two Security Platform components use this database to prevent threats? (Choose two)

- A. Brute-force signatures
- B. BrightCloud URL Filtering
- C. PAN-DB URL Filtering
- D. DNS-based command-and-control signatures

Answer: CD

NEW QUESTION 248

A company has a web server behind a Palo Alto Networks next-generation firewall that it wants to make accessible to the public at 1.1.1.1. The company has decided to configure a destination NAT Policy rule.

Given the following zone information:

- DMZ zone: DMZ-L3
- Public zone: Untrust-L3

- Guest zone: Guest-L3
- Web server zone: Trust-L3
- Public IP address (Untrust-L3): 1.1.1.1
- Private IP address (Trust-L3): 192.168.1.50

What should be configured as the destination zone on the Original Packet tab of NAT Policy rule?

- A. Untrust-L3
- B. DMZ-L3
- C. Guest-L3
- D. Trust-L3

Answer: A

NEW QUESTION 250

Company.com has an in-house application that the Palo Alto Networks device doesn't identify correctly. A Threat Management Team member has mentioned that this in-house application is very sensitive and all traffic being identified needs to be inspected by the Content-ID engine. Which method should company.com use to immediately address this traffic on a Palo Alto Networks device?

- A. Create a custom Application without signatures, then create an Application Override policy that includes the source, Destination, Destination Port/Protocol and Custom Application of the traffic.
- B. Wait until an official Application signature is provided from Palo Alto Networks.
- C. Modify the session timer settings on the closest referenced application to meet the needs of the in-house application
- D. Create a Custom Application with signatures matching unique identifiers of the in-house application traffic

Answer: D

NEW QUESTION 254

What must be used in Security Policy Rule that contain addresses where NAT policy applies?

- A. Pre-NAT addressse and Pre-NAT zones
- B. Post-NAT addressse and Post-Nat zones
- C. Pre-NAT addressse and Post-Nat zones
- D. Post-Nat addresses and Pre-NAT zones

Answer: C

NEW QUESTION 255

Click the Exhibit button below,

Exhibit Window							
			Source			Destination	
	Name	Tags	Zone/Interface	Address	User	Address	Application
1	PBF1	none	Trust-L3	192.168.10.0/24	any	172.16.10.0/24	any
2	PBF2	none	Trust-L3	192.168.10.0/24	any	172.16.10.0/24	any
3	PBF3	none	Trust-L3	192.168.10.0/24	Will	172.16.10.0/24	any

Forwarding				
Service	Action	Egress I/F	Next Hop	Enforce Symmetric Return
any	forward	ethernet1/2.2	172.20.20.1	false
service-http	forward	ethernet1/3.2	172.20.30.1	false
service-https	forward	ethernet1/3.3	172.20.40.1	false

A firewall has three PBF rules and a default route with a next hop of 172.20.10.1 that is configured in the default VR. A user named Will has a PC with a 192.168.10.10 IP address. He makes an HTTPS connection to 172.16.10.20.

Which is the next hop IP address for the HTTPS traffic from Will's PC?

- A. 172.20.30.1
- B. 172.20.40.1
- C. 172.20.20.1
- D. 172.20.10.1

Answer: C

NEW QUESTION 259

Which three function are found on the dataplane of a PA-5050? (Choose three)

- A. Protocol Decoder
- B. Dynamic routing
- C. Management
- D. Network Processing
- E. Signature Match

Answer: BDE

NEW QUESTION 264

What can missing SSL packets when performing a packet capture on dataplane interfaces?

- A. The packets are hardware offloaded to the offloaded processor on the dataplane
- B. The missing packets are offloaded to the management plane CPU
- C. The packets are not captured because they are encrypted
- D. There is a hardware problem with offloading FPGA on the management plane

Answer: A

NEW QUESTION 265

A host attached to ethernet1/3 cannot access the internet. The default gateway is attached to ethernet1/4. After troubleshooting. It is determined that traffic cannot pass from the ethernet1/3 to ethernet1/4. What can be the cause of the problem?

- A. DHCP has been set to Auto.
- B. Interface ethernet1/3 is in Layer 2 mode and interface ethernet1/4 is in Layer 3 mode.
- C. Interface ethernet1/3 and ethernet1/4 are in Virtual Wire Mode.
- D. DNS has not been properly configured on the firewall

Answer: B

NEW QUESTION 267

The GlobalProtect Portal interface and IP address have been configured. Which other value needs to be defined to complete the network settings configuration of GlobalProtect Portal?

- A. Server Certificate
- B. Client Certificate
- C. Authentication Profile
- D. Certificate Profile

Answer: A

Explanation:

(<https://live.paloaltonetworks.com/t5/Configuration-Articles/How-to-Configure-GlobalProtect/ta-p/58351>)

NEW QUESTION 272

A client is deploying a pair of PA-5000 series firewalls using High Availability (HA) in Active/Passive mode. Which statement is true about this deployment?

- A. The two devices must share a routable floating IP address
- B. The two devices may be different models within the PA-5000 series
- C. The HA1 IP address from each peer must be on a different subnet
- D. The management port may be used for a backup control connection

Answer: D

NEW QUESTION 273

Support for which authentication method was added in PAN-OS 8.0?

- A. RADIUS
- B. LDAP
- C. Diameter
- D. TACACS+

Answer: D

Explanation:

<https://www.paloaltonetworks.com/resources/datasheets/whats-new-in-pan-os-7-1>

NEW QUESTION 278

A company.com wants to enable Application Override. Given the following screenshot:



Which two statements are true if Source and Destination traffic match the Application Override policy? (Choose two)

- A. Traffic that matches "rtp-base" will bypass the App-ID and Content-ID engines.
- B. Traffic will be forced to operate over UDP Port 16384.
- C. Traffic utilizing UDP Port 16384 will now be identified as "rtp-base".
- D. Traffic utilizing UDP Port 16384 will bypass the App-ID and Content-ID engines.

Answer: AC

NEW QUESTION 281

A Network Administrator wants to deploy a Large Scale VPN solution. The Network Administrator has chosen a GlobalProtect Satellite solution. This configuration needs to be deployed to multiple remote offices and the Network Administrator decides to use Panorama to deploy the configurations. How should this be accomplished?

- A. Create a Template with the appropriate IKE Gateway settings
- B. Create a Template with the appropriate IPsec tunnel settings
- C. Create a Device Group with the appropriate IKE Gateway settings
- D. Create a Device Group with the appropriate IPsec tunnel settings

Answer: B

NEW QUESTION 286

Which option is an IPv6 routing protocol?

- A. RIPv3
- B. OSPFv3
- C. OSPv3
- D. BGP NG

Answer: B

NEW QUESTION 291

A network design change requires an existing firewall to start accessing Palo Alto Updates from a data plane interface address instead of the management interface.

Which configuration setting needs to be modified?

- A. Service route
- B. Default route
- C. Management profile
- D. Authentication profile

Answer: A

NEW QUESTION 292

Which URL Filtering Security Profile action toggles the URL Filtering category to the URL Filtering log?

- A. Log
- B. Alert
- C. Allow
- D. Default

Answer: B

NEW QUESTION 295

A network security engineer has a requirement to allow an external server to access an internal web server. The internal web server must also initiate connections with the external server.

What can be done to simplify the NAT policy?

- A. Configure ECMP to handle matching NAT traffic
- B. Configure a NAT Policy rule with Dynamic IP and Port
- C. Create a new Source NAT Policy rule that matches the existing traffic and enable the Bi-directional option
- D. Create a new Destination NAT Policy rule that matches the existing traffic and enable the Bi-directional option

Answer: C

Explanation:

<https://www.paloaltonetworks.com/documentation/70/pan-os/pan-os/networking/nat-configuration-examples>

NEW QUESTION 300

Which Panorama feature allows for logs generated by Panorama to be forwarded to an external Security Information and Event Management(SIEM) system?

- A. Panorama Log Settings
- B. Panorama Log Templates
- C. Panorama Device Group Log Forwarding
- D. Collector Log Forwarding for Collector Groups

Answer: A

Explanation:


https://www.paloaltonetworks.com/documentation/61/panorama/panorama_adminHYPERLINK

"[https://www.paloaltonetworks.com/documentation/61/panorama/panorama_adminguide/manag e-log-collection/enable-log-forwarding-from-panorama-to-external-destinations](https://www.paloaltonetworks.com/documentation/61/panorama/panorama_adminguide/manag-e-log-collection/enable-log-forwarding-from-panorama-to-external-destinations)"nguidHYPERLINK "[https://www.paloaltonetworks.com/documentation/61/panorama/panorama_adminguide/manag e-log-collection/enable-log-forwarding-from-panorama-to-external-destinations](https://www.paloaltonetworks.com/documentation/61/panorama/panorama_adminguide/manag-e-log-collection/enable-log-forwarding-from-panorama-to-external-destinations)"e/manage-log- collection/enable-log-forwarding-from-panorama-to-external-destinaHYPERLINK

"[https://www.paloaltonetworks.com/documentation/61/panorama/panorama_adminguide/manag e-log-collection/enable-log-forwarding-from-panorama-to-external-destinations](https://www.paloaltonetworks.com/documentation/61/panorama/panorama_adminguide/manag-e-log-collection/enable-log-forwarding-from-panorama-to-external-destinations)"tions

NEW QUESTION 304

What will be the source address in the ICMP packet?

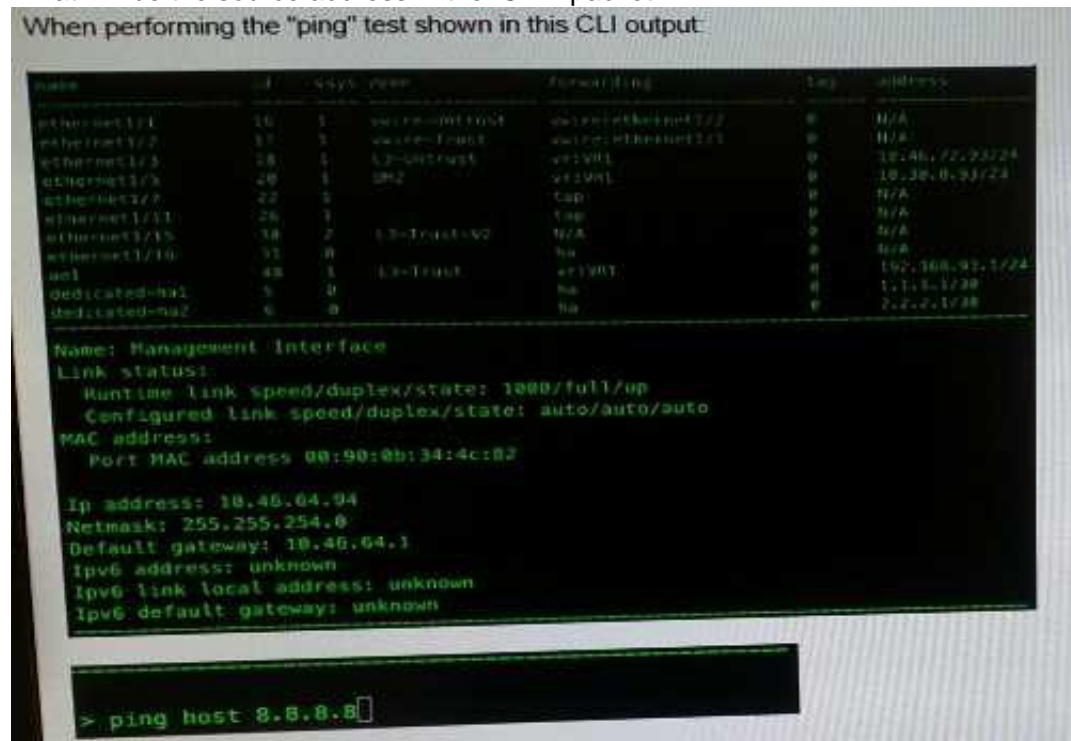

"The command show system resources gives a snapshot of Management Plane (MP) resource utilization including memory and CPU. This is similar to the 'top' command in Linux." <https://live.paloaltonetworks.com/t5/Learning-Articles/How-to-Interpret-show-system-resources/ta-p/59364>"
"https://live.paloaltonetworks.com/t5/Learning-Articles/How-to-Interpret-show-system-resources/ta-p/59364"ks.com/t5/Learning-Articles/How-to-Interpret-show-system-resources/ta-p/59364

NEW QUESTION 314

Which two logs on the firewall will contain authentication-related information useful for troubleshooting purpose (Choose two)

- A. ms.log
- B. traffic.log
- C. system.log
- D. dp-monitor.log
- E. authd.log

Answer: CE

NEW QUESTION 315

How can a Palo Alto Networks firewall be configured to send syslog messages in a format compatible with non-standard syslog servers?

- A. Enable support for non-standard syslog messages under device management
- B. Check the custom-format check box in the syslog server profile
- C. Select a non-standard syslog server profile
- D. Create a custom log format under the syslog server profile

Answer: D

NEW QUESTION 319

Refer to Exhibit:

Exhibit Window					
	Name	Tags	Zone/Interface	Source Address	User
1	PBF1	none	Trust-L3	192.168.10.0/24	any
2	PBF2	none	Trust-L3	192.168.10.0/24	any
3	PBF3	none	Trust-L3	192.168.10.0/24	Will

Exhibit Window					
	Application	Service	Action	Egress I/F	Next Hop
4	any	any	forward	ethernet1/2.2	172.20.20.1
4	any	service-http	forward	ethernet1/3.2	172.20.30.1
4	any	service-https	forward	ethernet1/3.3	172.20.40.1

A firewall has three PDF rules and a default route with a next hop of 172.29.19.1 that is configured in the default VR. A user named XX-bes a PC with a 192.168.101.10 IP address. He makes an HTTPS connection to 172.16.10.29. What is the next hop IP address for the HTTPS traffic from Wills PC.

- A. 172.20.30.1
- B. 172.20.20.1
- C. 172.20.10.1
- D. 172.20.40.1

Answer: B

NEW QUESTION 323

Which two actions are required to make Microsoft Active Directory users appear in a firewall traffic log? (Choose two.)

- A. Run the User-ID Agent using an Active Directory account that has "event log viewer" permissions
- B. Enable User-ID on the zone object for the destination zone
- C. Run the User-ID Agent using an Active Directory account that has "domain administrator" permissions
- D. Enable User-ID on the zone object for the source zone
- E. Configure a RADIUS server profile to point to a domain controller

Answer: AD

NEW QUESTION 326

Which two virtualized environments support Active/Active High Availability (HA) in PAN-OS 8.0? (Choose two.)

- A. KVM
- B. VMware ESX
- C. VMware NSX
- D. AWS

Answer: AB

NEW QUESTION 327

Site-A and Site-B need to use IKEv2 to establish a VPN connection. Site A connects directly to the internet using a public IP address. Site-B uses a private IP address behind an ISP router to connect to the internet.

How should NAT Traversal be implemented for the VPN connection to be established between Site-A and Site-B?

- A. Enable on Site-A only
- B. Enable on Site-B only
- C. Enable on Site-B only with passive mode
- D. Enable on Site-A and Site-B

Answer: D

NEW QUESTION 329

YouTube videos are consuming too much bandwidth on the network, causing delays in mission- critical traffic. The administrator wants to throttle YouTube traffic. The following interfaces and zones are in use on the firewall:

* ethernet1/1, Zone: Untrust (Internet-facing)

* ethernet1/2, Zone: Trust (client-facing)

A QoS profile has been created, and QoS has been enabled on both interfaces. A QoS rule exists to put the YouTube application into QoS class 6. Interface Ethernet1/1 has a QoS profile called Outbound, and interface Ethernet1/2 has a QoS profile called Inbound.

Which setting for class 6 with throttle YouTube traffic?

- A. Outbound profile with Guaranteed Ingress
- B. Outbound profile with Maximum Ingress
- C. Inbound profile with Guaranteed Egress
- D. Inbound profile with Maximum Egress

Answer: D

NEW QUESTION 333

.....

Relate Links

100% Pass Your PCNSE Exam with ExamBible Prep Materials

<https://www.exambible.com/PCNSE-exam/>

Contact us

We are proud of our high-quality customer service, which serves you around the clock 24/7.

Viste - <https://www.exambible.com/>