

CompTIA

Exam Questions N10-008

CompTIA Network+Exam



NEW QUESTION 1

A network engineer configured new firewalls with the correct configuration to be deployed to each remote branch. Unneeded services were disabled, and all firewall rules were applied successfully. Which of the following should the network engineer perform NEXT to ensure all the firewalls are hardened successfully?

- A. Ensure an implicit permit rule is enabled
- B. Configure the log settings on the firewalls to the central syslog server
- C. Update the firewalls with current firmware and software
- D. Use the same complex passwords on all firewalls

Answer: C

NEW QUESTION 2

A network technician was troubleshooting an issue for a user who was being directed to cloned websites that were stealing credentials. The URLs were correct for the websites but an incorrect IP address was revealed when the technician used ping on the user's PC. After checking the DNS settings, the technician found the DNS server address was incorrect. Which of the following describes the issue?

- A. Rogue DHCP server
- B. Misconfigured HSRP
- C. DNS poisoning
- D. Exhausted IP scope

Answer: D

NEW QUESTION 3

Which of the following is used to track and document various types of known vulnerabilities?

- A. CVE
- B. Penetration testing
- C. Zero-day
- D. SIEM
- E. Least privilege

Answer: A

NEW QUESTION 4

A network technician is observing the behavior of an unmanaged switch when a new device is added to the network and transmits data. Which of the following BEST describes how the switch processes this information?

- A. The data is flooded out of every port including the one on which it came in.
- B. The data is flooded out of every port but only in the VLAN where it is located.
- C. The data is flooded out of every port, except the one on which it came in.
- D. The data is flooded out of every port, excluding the VLAN where it is located.

Answer: C

NEW QUESTION 5

Which of the following devices would be used to manage a corporate WLAN?

- A. A wireless NAS
- B. A wireless bridge
- C. A wireless router
- D. A wireless controller

Answer: D

NEW QUESTION 6

A network administrator redesigned the positioning of the APs to create adjacent areas of wireless coverage. After project validation, some users still report poor connectivity when their devices maintain an association to a distanced AP. Which of the following should the network administrator check FIRST?

- A. Validate the roaming settings on the APs and WLAN clients
- B. Verify that the AP antenna type is correct for the new layout
- C. Check to see if MU-MIMO was properly activated on the APs
- D. Deactivate the 2.4GHz band on the APs

Answer: A

NEW QUESTION 7

A network technician is installing new software on a Windows-based server in a different geographical location. Which of the following would be BEST for the technician to use to perform this task?

- A. RDP
- B. SSH
- C. FTP
- D. DNS

Answer: A

NEW QUESTION 8

SIMULATION


You have been tasked with setting up a wireless network in an office. The network will consist of 3 Access Points and a single switch. The network must meet the following parameters:

The SSIDs need to be configured as CorpNet with a key of S3cr3t! The wireless signals should not interfere with each other

The subnet the Access Points and switch are on should only support 30 devices maximum The Access Points should be configured to only support TKIP clients at a maximum speed INSTRUCTIONS

Click on the wireless devices and review their information and adjust the settings of the access points to meet the given requirements.

If at any time you would like to bring back the initial state of the simulation, please click the Reset All button.

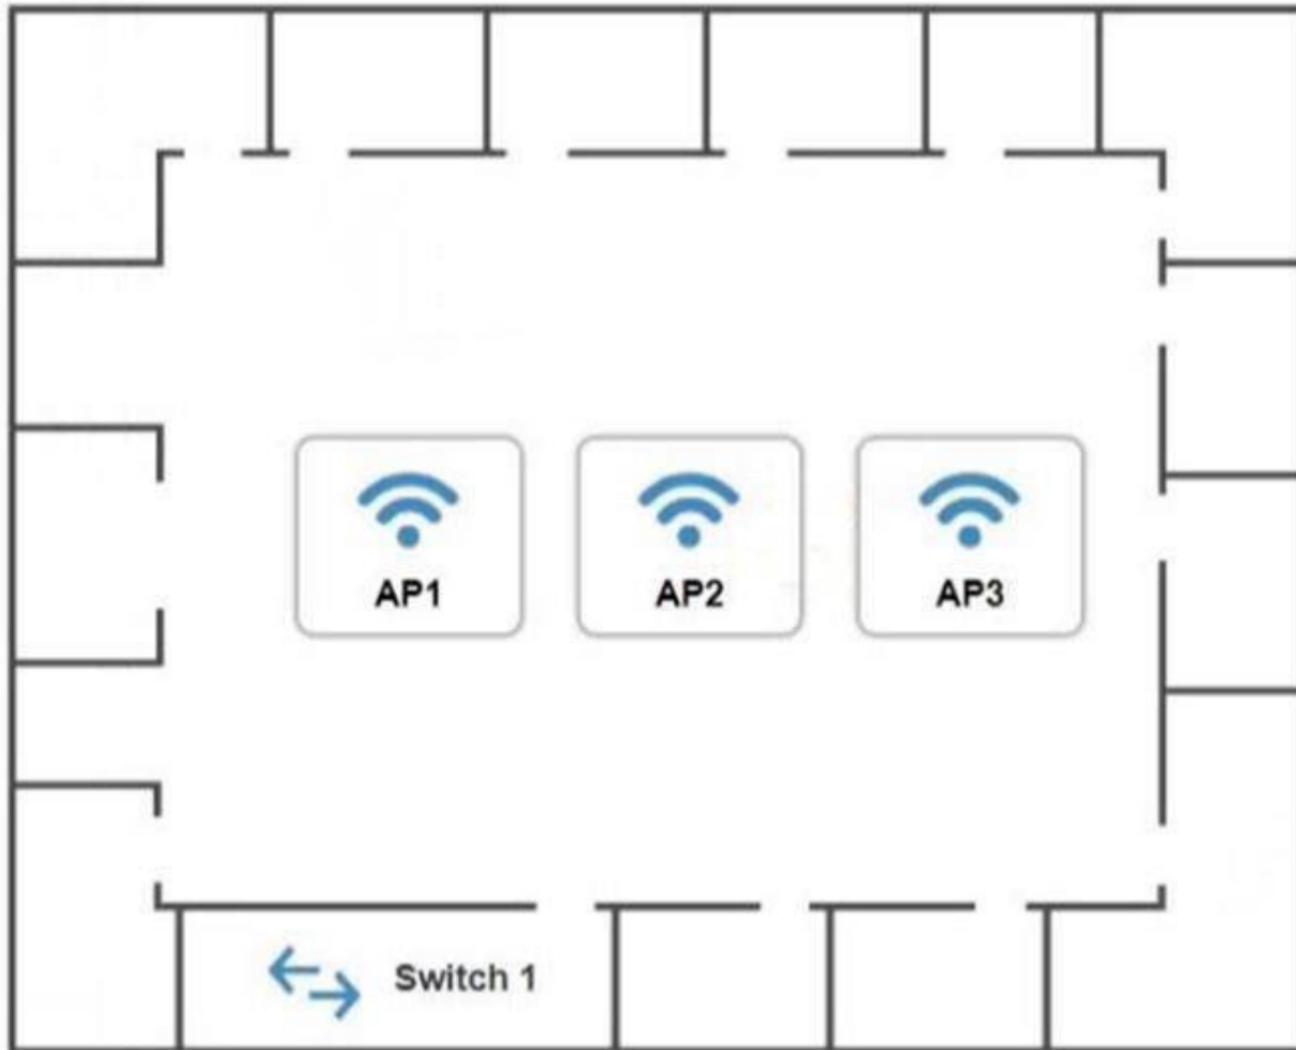

192.168.1.2
 Speed: Auto
 Duplex: Auto

AP1 Configuration

https://ap1.setup.do

Basic Configuration

Access Point Name: AP1

IP Address: /

Gateway: 192.168.1.1

SSID:

SSID Broadcast: Yes No

Wireless

Mode:
 B
 G

Channel:

Wired

Speed: Auto 100 1000

Duplex: Auto Half Full

Security Configuration

Security Settings: None WEP WPA WPA2 WPA2 - Enterprise

Key or Passphrase:

Reset to Default Save Close

AP2 Configuration

https://ap2.setup.do

Basic Configuration

Access Point Name: AP2

IP Address: [] / []

Gateway: 192.168.1.1

SSID: []

SSID Broadcast: Yes No

Wireless

Mode: [B / G]

Channel: [1 / 2 / 3 / 4 / 5 / 6 / 7 / 8 / 9 / 10 / 11]

Wired

Speed: Auto 100 1000

Duplex: Auto Half Full

Security Configuration

Security Settings: None WEP WPA WPA2 WPA2 - Enterprise

Key or Passphrase: []

Reset to Default Save Close

AP3 Configuration
✕

⏪ ⏩ ↻

Basic Configuration

Access Point Name

IP Address /

Gateway

SSID

SSID Broadcast Yes No

Wireless

Mode

Channel

Wired

Speed Auto 100 1000

Duplex Auto Half Full

Security Configuration

Security Settings None WEP WPA WPA2 WPA2 - Enterprise

Key or Passphrase

Reset to Default
Save
Close

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

On the first exhibit, the layout should be as follows
 Access Point Name AP1
 IP Address 192.168.1.3
 Gateway 192.168.1.2
 SSID corpnet
 SSID Broadcast yes
 Mode G
 Channel 1
 Speed Auto
 Duplex Auto
 WPA
 Passphrase S3cr3t!
 Exhibit 2 as follows
 Access Point Name AP2
 IP Address 192.168.1.4
 Gateway 192.168.1.2
 SSID corpnet
 SSID Broadcast yes
 Mode G
 Channel 6
 Speed Auto

Duplex Auto WPA
Passphrase S3cr3t! Exhibit 3 as follows Access Point Name AP3 IP Address 192.168.1.5
Gateway 192.168.1.2 SSID corpnet
SSID Broadcast yes Mode G
Channel 11 Speed Auto Duplex Auto WPA
Passphrase S3cr3t!

NEW QUESTION 9

An engineer is configuring redundant network links between switches. Which of the following should the engineer enable to prevent network stability issues?

- A. 802.1Q
- B. STP
- C. Flow control
- D. CSMA/CD

Answer: B

NEW QUESTION 10

A network technician is investigating an issue with a desktop that is not connecting to the network. The desktop was connecting successfully the previous day, and no changes were made to the environment. The technician locates the switchport where the device is connected and observes the LED status light on the switchport is not lit even though the desktop is turned on Other devices that are plugged into the switch are connecting to the network successfully Which of the following is MOST likely the cause of the desktop not connecting?

- A. Transceiver mismatch
- B. VLAN mismatch
- C. Port security
- D. Damaged cable
- E. Duplex mismatch

Answer: C

NEW QUESTION 10

A technician is installing a new fiber connection to a network device in a datacenter. The connection from the device to the switch also traverses a patch panel connection. The chain of connections is in the following order:

Device
LC/LC patch cable Patch panel
Cross-connect fiber cable Patch panel
LC/LC patch cable Switch

The connection is not working. The technician has changed both patch cables with known working patch cables. The device had been tested and was working properly before being installed. Which of the following is the MOST likely cause of the issue?

- A. TX/RX is reversed
- B. An incorrect cable was used
- C. The device failed during installation
- D. Attenuation is occurring

Answer: A

NEW QUESTION 13

A network device is configured to send critical events to a syslog server; however, the following alerts are not being received:
Severity 5 LINK-UPDOWN: Interface 1/1, changed state to down Severity 5LINK-UPDOWN: Interface 1/3, changed state to down
Which of the following describes the reason why the events are not being received?

- A. The network device is not configured to log that level to the syslog server
- B. The network device was down and could not send the event
- C. The syslog server is not compatible with the network device
- D. The syslog server did not have the correct MIB loaded to receive the message

Answer: A

NEW QUESTION 17

An organization with one core and five distribution switches is transitioning from a star to a full-mesh topology Which of the following is the number of additional network connections needed?

- A. 5
- B. 7
- C. 10
- D. 15

Answer: A

NEW QUESTION 19

A technician is assisting a user who cannot connect to a network resource. The technician first checks for a link light. According to troubleshooting methodology, this is an example of:

- A. using a bottom-to-top approach.
- B. establishing a plan of action.

- C. documenting a finding.
- D. questioning the obvious.

Answer: D

NEW QUESTION 20

An IDS was installed behind the edge firewall after a network was breached. The network was then breached again even though the IDS logged the attack. Which of the following should be used in place of these devices to prevent future attacks?

- A. A network tap
- B. A proxy server
- C. A UTM appliance
- D. A content filter

Answer: C

NEW QUESTION 25

A lab environment hosts Internet-facing web servers and other experimental machines, which technicians use for various tasks. A technician installs software on one of the web servers to allow communication to the company's file server, but it is unable to connect to it. Other machines in the building are able to retrieve files from the file server. Which of the following is the MOST likely reason the web server cannot retrieve the files, and what should be done to resolve the problem?

- A. The lab environment's IDS is blocking the network traffic. The technician can whitelist the new application in the IDS.
- B. The lab environment is located in the DMZ, and traffic to the LAN zone is denied by default.
- C. The technician can move the computer to another zone or request an exception from the administrator.
- D. The lab environment has lost connectivity to the company router, and the switch needs to be rebooted. The technician can get the key to the wiring closet and manually restart the switch.
- E. The lab environment is currently set up with hubs instead of switches, and the requests are getting bounced back. The technician can submit a request for upgraded equipment to management.

Answer: B

NEW QUESTION 29

The following configuration is applied to a DHCP server connected to a VPN concentrator:

```
IP address:      10.0.0.1
Subnet mask:     255.255.255.0
Gateway:        10.0.0.254
```

There are 300 non-concurrent sales representatives who log in for one hour a day to upload reports, and 252 of these representatives are able to connect to the VPN without any issues. The remaining sales representatives cannot connect to the VPN over the course of the day. Which of the following can be done to resolve the issue without utilizing additional resources?

- A. Decrease the lease duration
- B. Reboot the DHCP server
- C. Install a new VPN concentrator
- D. Configure a new router

Answer: A

NEW QUESTION 30

An administrator is writing a script to periodically log the IPv6 and MAC addresses of all the devices on a network segment. Which of the following switch features will MOST likely be used to assist with this task?

- A. Spanning Tree Protocol
- B. Neighbor Discovery Protocol
- C. Link Aggregation Control Protocol
- D. Address Resolution Protocol

Answer: B

NEW QUESTION 33

A company wants to implement a large number of WAPs throughout its building and allow users to be able to move around the building without dropping their connections. Which of the following pieces of equipment would be able to handle this requirement?

- A. A VPN concentrator
- B. A load balancer
- C. A wireless controller
- D. A RADIUS server

Answer: A

NEW QUESTION 35

Which of the following systems would MOST likely be found in a screened subnet?

- A. RADIUS
- B. FTP
- C. SQL

D. LDAP

Answer: B

NEW QUESTION 39

Which of the following would be BEST to use to detect a MAC spoofing attack?

- A. Internet Control Message Protocol
- B. Reverse Address Resolution Protocol
- C. Dynamic Host Configuration Protocol
- D. Internet Message Access Protocol

Answer: B

NEW QUESTION 41

A technician is troubleshooting a wireless connectivity issue in a small office located in a high-rise building. Several APs are mounted in this office. The users report that the network connections frequently disconnect and reconnect throughout the day. Which of the following is the MOST likely cause of this issue?

- A. The AP association time is set too low
- B. EIRP needs to be boosted
- C. Channel overlap is occurring
- D. The RSSI is misreported

Answer: B

NEW QUESTION 42

Which of the following transceiver types can support up to 40Gbps?

- A. SFP+
- B. QSFP+
- C. QSFP
- D. SFP

Answer: B

NEW QUESTION 46

There are two managed legacy switches running that cannot be replaced or upgraded. These switches do not support cryptographic functions, but they are password protected. Which of the following should a network administrator configure to BEST prevent unauthorized access?

- A. Enable a management access list
- B. Disable access to unnecessary services.
- C. Configure a stronger password for access
- D. Disable access to remote management
- E. Use an out-of-band access method.

Answer: A

NEW QUESTION 48

A technician receives feedback that some users are experiencing high amounts of jitter while using the wireless network. While troubleshooting the network, the technician uses the ping command with the IP address of the default gateway and verifies large variations in latency. The technician thinks the issue may be interference from other networks and non-802.11 devices. Which of the following tools should the technician use to troubleshoot the issue?

- A. NetFlow analyzer
- B. Bandwidth analyzer
- C. Protocol analyzer
- D. Spectrum analyzer

Answer: D

NEW QUESTION 51

A city has hired a new employee who needs to be able to work when traveling at home and at the municipal sourcing of a neighboring city that snares services. The employee is issued a laptop, and a technician needs to train the employee on the appropriate solutions for secure access to the network from all the possible locations. On which of the following solutions would the technician MOST likely train the employee?

- A. Site-to-site VPNs between the two city locations and client-to-site software on the employee's laptop for all other remote access
- B. Client-to-site VPNs between the travel locations and site-to-site software on the employee's laptop for all other remote access
- C. Client-to-site VPNs between the two city locations and site-to-site software on the employee's laptop for all other remote access
- D. Site-to-site VPNs between the home and city locations and site-to-site software on the employee's laptop for all other remote access

Answer: A

NEW QUESTION 52

Which of the following DNS records works as an alias to another record?

- A. AAAA

- B. CNAME
- C. MX
- D. SOA

Answer: B

NEW QUESTION 54

A network administrator is installing a wireless network at a client's office. Which of the following IEEE 802.11 standards would be BEST to use for multiple simultaneous client access?

- A. CDMA
- B. CSMA/CD
- C. CSMA/CA
- D. GSM

Answer: A

NEW QUESTION 59

Which of the following would need to be configured to ensure a device with a specific MAC address is always assigned the same IP address from DHCP?

- A. Scope options
- B. Reservation
- C. Dynamic assignment
- D. Exclusion
- E. Static assignment

Answer: B

NEW QUESTION 63

A technician is installing multiple UPS units in a major retail store. The technician is required to keep track of all changes to new and old equipment. Which of the following will allow the technician to record these changes?

- A. Asset tags
- B. A smart locker
- C. An access control vestibule
- D. A camera

Answer: A

NEW QUESTION 64

Which of the following routing protocols is used to exchange route information between public autonomous systems?

- A. OSPF
- B. BGP
- C. EIGRP
- D. RIP

Answer: B

NEW QUESTION 65

A network administrator is setting up several IoT devices on a new VLAN and wants to accomplish the following

- * 1. Reduce manual configuration on each system
- * 2. Assign a specific IP address to each system
- * 3. Allow devices to move to different switchports on the same VLAN

Which of the following should the network administrator do to accomplish these requirements?

- A. Set up a reservation for each device
- B. Configure a static IP on each device
- C. Implement private VLANs for each device
- D. Use DHCP exclusions to address each device

Answer: C

NEW QUESTION 69

Which of the following is used to prioritize Internet usage per application and per user on the network?

- A. Bandwidth management
- B. Load balance routing
- C. Border Gateway Protocol
- D. Administrative distance

Answer: A

NEW QUESTION 72

A Chief Information Officer (CIO) wants to improve the availability of a company's SQL database. Which of the following technologies should be utilized to achieve

maximum availability?

- A. Clustering
- B. Port aggregation
- C. NIC teaming
- D. Snapshots

Answer: C

NEW QUESTION 74

A branch of a company recently switched to a new ISP. The network engineer was given a new IP range to assign. The ISP assigned 196.26.4.0/26, and the branch gateway router now has the following configurations on the interface that peers to the ISP:

```
IP address:      196.26.4.30
Subnet mask:     255.255.255.224
Gateway:        196.24.4.1
```

The network engineer observes that all users have lost Internet connectivity. Which of the following describes the issue?

- A. The incorrect subnet mask was configured
- B. The incorrect gateway was configured
- C. The incorrect IP address was configured
- D. The incorrect interface was configured

Answer: A

NEW QUESTION 75

A network engineer is investigating reports of poor network performance. Upon reviewing a report, the engineer finds that jitter at the office is greater than 10ms on the only WAN connection available. Which of the following would be MOST affected by this statistic?

- A. A VoIP sales call with a customer
- B. An in-office video call with a coworker
- C. Routing table from the ISP
- D. Firewall CPU processing time

Answer: A

NEW QUESTION 79

You are tasked with verifying the following requirements are met in order to ensure network security. Requirements:

Datacenter

Ensure network is subnetted to allow all devices to communicate properly while minimizing address space usage

Provide a dedicated server to resolve IP addresses and hostnames correctly and handle port 53 traffic Building A

Ensure network is subnetted to allow all devices to communicate properly while minimizing address space usage

Provide devices to support 5 additional different office users Add an additional mobile user

Replace the Telnet server with a more secure solution Screened subnet


Ensure network is subnetted to allow all devices to communicate properly while minimizing address space usage

Provide a server to handle external 80/443 traffic Provide a server to handle port 20/21 traffic INSTRUCTIONS

Drag and drop objects onto the appropriate locations. Objects can be used multiple times and not all placeholders need to be filled.

Available objects are located in both the Servers and Devices tabs of the Drag & Drop menu.

If at any time you would like to bring back the initial state of the simulation, please click the Reset All button.

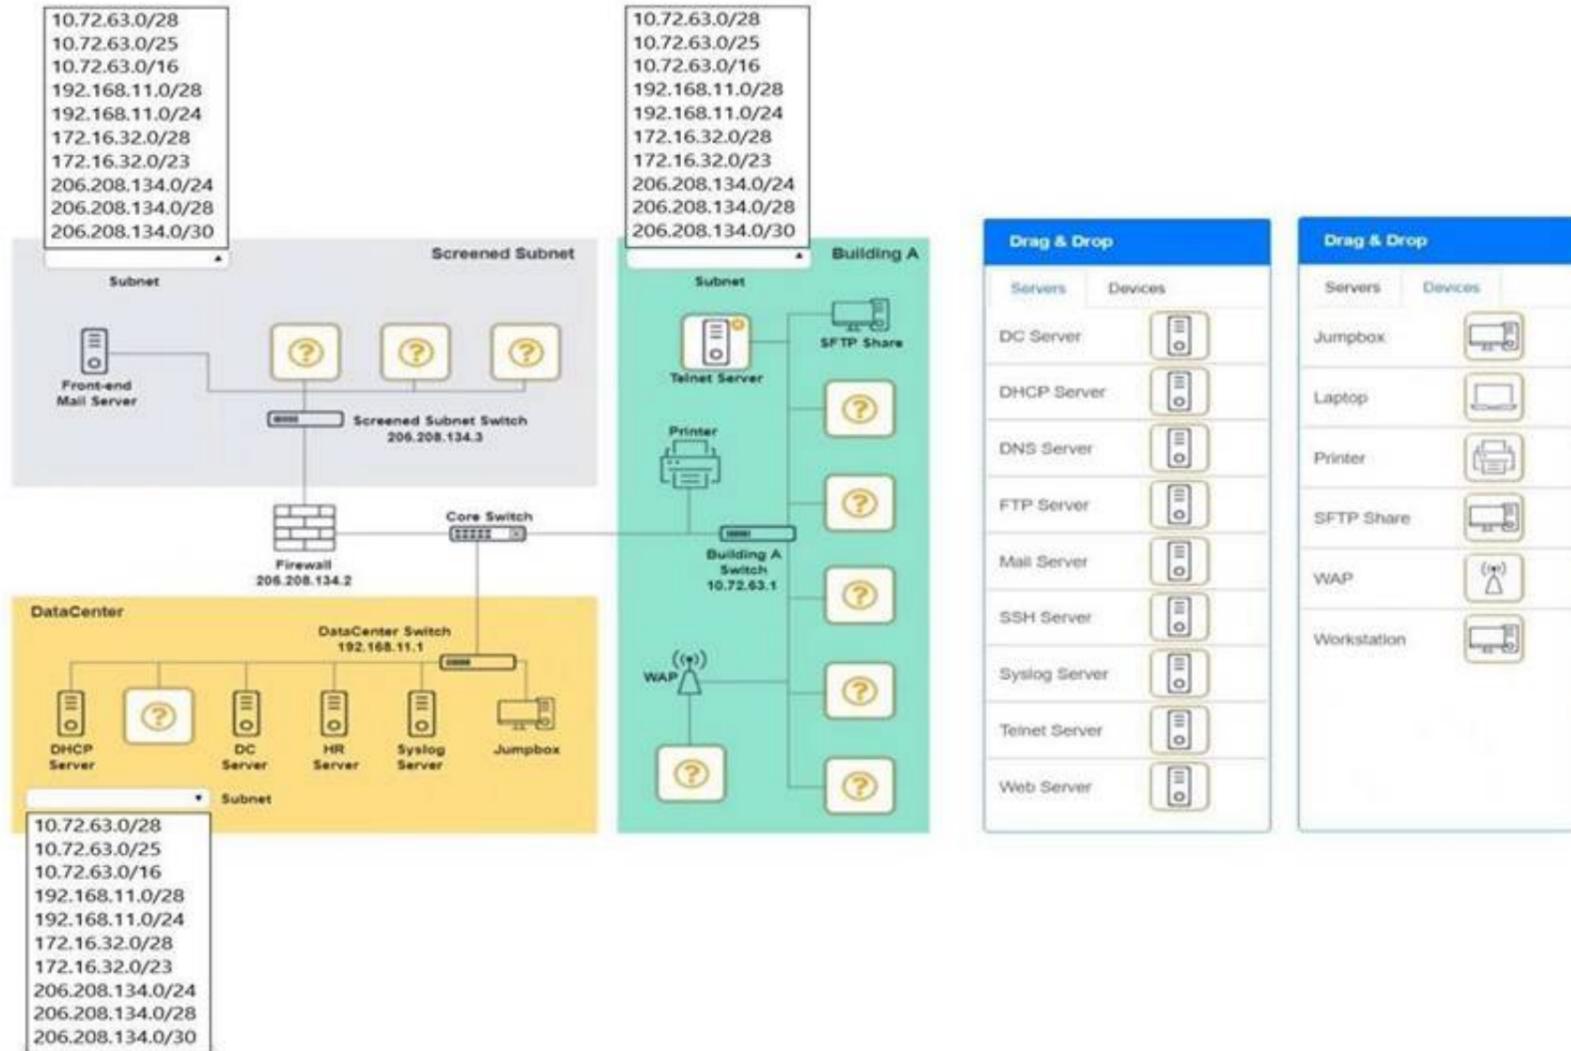

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Top left subnet – 206.208.134.0/28
 Top right subnet – 10.72.63.0/28 Bottom subnet – 192.168.11.0/28
 Screened Subnet devices – Web server, FTP server
 Building A devices – SSH server top left, workstations on all 5 on the right, laptop on bottom left DataCenter devices – DNS server.

NEW QUESTION 84

A network administrator wants to improve the security of the management console on the company's switches and ensure configuration changes made can be correlated to the administrator who conformed them Which of the following should the network administrator implement?

- A. Port security
- B. Local authentication
- C. TACACS+
- D. Access control list

Answer: C

NEW QUESTION 86

A technician is installing a high-density wireless network and wants to use an available frequency that supports the maximum number of channels to reduce interference. Which of the following standard 802.11 frequency ranges should the technician look for while reviewing WAP specifications?

- A. 2.4GHz
- B. 5GHz
- C. 6GHz
- D. 900MHz

Answer: B

NEW QUESTION 88

A company built a new building at its headquarters location. The new building is connected to the company's LAN via fiber-optic cable. Multiple users in the new building are unable to access the company's intranet site via their web browser, but they are able to access internet sites. Which of the following describes how the network administrator can resolve this issue?

- A. Correct the DNS server entries in the DHCP scope
- B. Correct the external firewall gateway address
- C. Correct the NTP server settings on the clients
- D. Correct a TFTP Issue on the company's server

Answer: A

NEW QUESTION 89

A user recently made changes to a PC that caused it to be unable to access websites by both FQDN and IP Local resources, such as the file server remain accessible. Which of the following settings did the user MOST likely misconfigure?

- A. Static IP
- B. Default gateway
- C. DNS entries
- D. Local host file

Answer: B

NEW QUESTION 91

Given the following information:

Protocol	Local address	Foreign address	State
TCP	127.0.0.1:57779	Desktop-Open:57780	Established
TCP	127.0.0.1:57780	Desktop-Open:57779	Established

Which of the following command-line tools would generate this output?

- A. netstat
- B. arp
- C. dig
- D. tracert

Answer: A

NEW QUESTION 94

Which of the following service models would MOST likely be used to replace on-premises servers with a cloud solution?

- A. PaaS
- B. IaaS
- C. SaaS
- D. Disaster recovery as a Service (DRaaS)

Answer: B

NEW QUESTION 99

Which of the following is the LARGEST MTU for a standard Ethernet frame?

- A. 1452
- B. 1492
- C. 1500
- D. 2304

Answer: C

NEW QUESTION 101

A technician is configuring a network switch to be used in a publicly accessible location. Which of the following should the technician configure on the switch to prevent unintended connections?

- A. DHCP snooping
- B. Geofencing
- C. Port security
- D. Secure SNMP

Answer: C

NEW QUESTION 102

A network administrator has been directed to present the network alerts from the past week to the company's executive staff. Which of the following will provide the BEST collection and presentation of this data?

- A. A port scan printout
- B. A consolidated report of various network devices
- C. A report from the SIEM tool
- D. A report from a vulnerability scan done yesterday

Answer: C

NEW QUESTION 103

A network technician is manually configuring the network settings for a new device and is told the network block is 192.168.0.0/20. Which of the following subnets should the technician use?

- A. 255.255.128.0
- B. 255.255.192.0
- C. 255.255.240.0

D. 255.255.248.0

Answer: C

NEW QUESTION 108

A fiber link connecting two campus networks is broken. Which of the following tools should an engineer use to detect the exact break point of the fiber link?

- A. OTDR
- B. Tone generator
- C. Fusion splicer
- D. Cable tester
- E. PoE injector

Answer: A

NEW QUESTION 109

Which of the following TCP ports is used by the Windows OS for file sharing?

- A. 53
- B. 389
- C. 445
- D. 1433

Answer: C

NEW QUESTION 114

Given the following output:

```
192.168.22.1    00-13-5d-00-e6-23
192.168.22.15  00-15-88-00-58-00
192.168.22.10  00-13-5d-00-e6-23
192.168.22.100 00-13-5d-00-e6-23
```

Which of the following attacks is this MOST likely an example of?

- A. ARP poisoning
- B. VLAN hopping
- C. Rogue access point
- D. Amplified DoS

Answer: A

NEW QUESTION 117

Which of the following can be used to centrally manage credentials for various types of administrative privileges on configured network devices?

- A. SSO
- B. TACACS+
- C. Zero Trust
- D. Separation of duties
- E. Multifactor authentication

Answer: B

NEW QUESTION 119

A technician is troubleshooting a previously encountered issue. Which of the following should the technician reference to find what solution was implemented to resolve the issue?

- A. Standard operating procedures
- B. Configuration baseline documents
- C. Work instructions
- D. Change management documentation

Answer: A

NEW QUESTION 123

A workstation is configured with the following network details:

IP address	Subnet mask	Default gateway
10.1.2.23	10.1.2.0/27	10.1.2.1

Software on the workstation needs to send a query to the local subnet broadcast address. To which of the following addresses should the software be configured to send the query?

- A. 10.1.2.0
- B. 10.1.2.1
- C. 10.1.2.23
- D. 10.1.2.255

E. 10.1.2.31

Answer: E

NEW QUESTION 128

A user reports being unable to access network resources after making some changes in the office. Which of the following should a network technician do FIRST?

- A. Check the system's IP address
- B. Do a ping test against the servers
- C. Reseat the cables into the back of the PC
- D. Ask what changes were made

Answer: D

NEW QUESTION 131

A network engineer is designing a new secure wireless network. The engineer has been given the following requirements:

- * 1 Must not use plaintext passwords
- * 2 Must be certificate based
- * 3. Must be vendor neutral

Which of the following methods should the engineer select?

- A. TWP-RC4
- B. CCMP-AES
- C. EAP-TLS
- D. WPA2

Answer: C

NEW QUESTION 136

A network field technician is installing and configuring a secure wireless network. The technician performs a site survey. Which of the following documents would MOST likely be created as a result of the site survey?

- A. Physical diagram
- B. Heat map
- C. Asset list
- D. Device map

Answer: B

NEW QUESTION 139

A wireless network was installed in a warehouse for employees to scan crates with a wireless handheld scanner. The wireless network was placed in the corner of the building near the ceiling for maximum coverage. However, users in the offices adjacent to the warehouse have noticed a large amount of signal overlap from the new network. Additionally, warehouse employees report difficulty connecting to the wireless network from the other side of the building; however, they have no issues when they are near the antenna. Which of the following is MOST likely the cause?

- A. The wireless signal is being refracted by the warehouse's windows
- B. The antenna's power level was set too high and is overlapping
- C. An omnidirectional antenna was used instead of a unidirectional antenna
- D. The wireless access points are using channels from the 5GHz spectrum

Answer: A

NEW QUESTION 142

The network administrator is informed that a user's email password is frequently hacked by brute-force programs. Which of the following policies should the network administrator implement to BEST mitigate this issue? (Choose two.)

- A. Captive portal
- B. Two-factor authentication
- C. Complex passwords
- D. Geofencing
- E. Role-based access
- F. Explicit deny

Answer: BC

NEW QUESTION 146

A systems administrator needs to improve WiFi performance in a densely populated office tower and use the latest standard. There is a mix of devices that use 2.4 GHz and 5 GHz. Which of the following should the systems administrator select to meet this requirement?

- A. 802.11ac
- B. 802.11ax
- C. 802.11g
- D. 802.11n

Answer: B

NEW QUESTION 147

Which of the following security devices would be BEST to use to provide mechanical access control to the MDF/IDF?

- A. A smart card
- B. A key fob
- C. An employee badge
- D. A door lock

Answer: B

NEW QUESTION 152

Which of the following policies is MOST commonly used for guest captive portals?

- A. AUP
- B. DLP
- C. BYOD
- D. NDA

Answer: A

NEW QUESTION 155

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

N10-008 Practice Exam Features:

- * N10-008 Questions and Answers Updated Frequently
- * N10-008 Practice Questions Verified by Expert Senior Certified Staff
- * N10-008 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * N10-008 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The N10-008 Practice Test Here](#)