

300-620 Dumps

Implementing Cisco Application Centric Infrastructure (DCACI)

<https://www.certleader.com/300-620-dumps.html>



NEW QUESTION 1

A situation causes a fault to be raised on the APIC. The ACI administrator does not want that fault to be raised because it is not directly relevant to the environment. Which action should the administrator take to prevent the fault from appearing?

- A. Under System -> Faults, right-click on the fault and select Acknowledge Fault so that acknowledged faults will immediately disappear.
- B. Create a stats threshold policy with both rising and falling thresholds defined so that the critical severity threshold matches the squelched threshold.
- C. Under System -> Faults, right-click on the fault and select Ignore Fault to create a fault severity assignment policy that hides the fault.
- D. Create a new global health score policy that ignores specific faults as identified by their unique fault code.

Answer: C

NEW QUESTION 2

A RADIUS user resolves its role via the Cisco AV Pair. What object does the Cisco AV Pair resolve to?

- A. tenant
- B. security domain
- C. primary Cisco APIC
- D. managed object class


Answer: D

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/Security_config/b_Cisco_APIC_Security_Configuration_Guide/b_Cisco_API_C_Security_Guide_chapter_01011.html

NEW QUESTION 3

Refer to the exhibit.

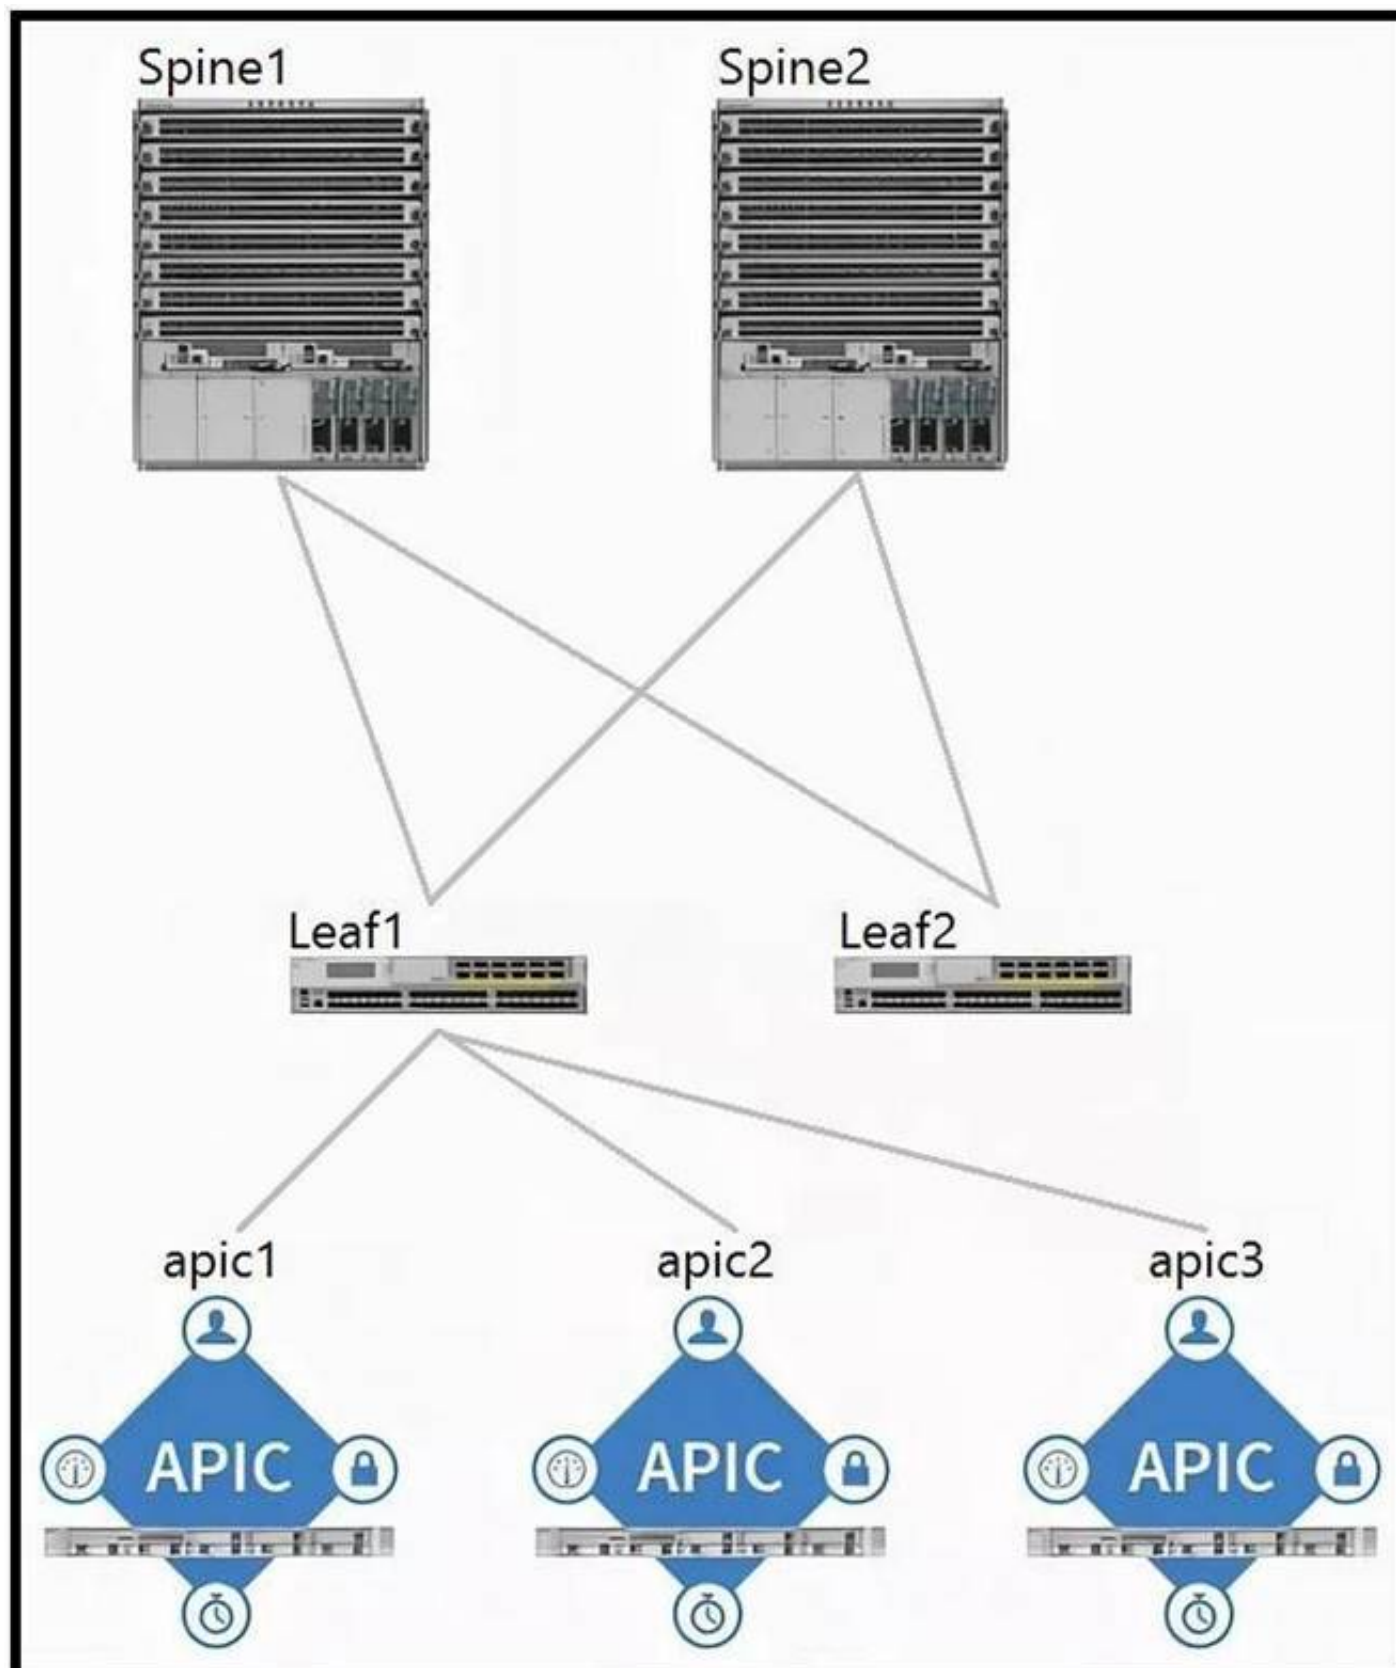

Which two components should be configured as route reflectors in the ACI fabric? (Choose two.)

- A. Spine1

- B. apic1
- C. Spine2
- D. Leaf1
- E. Leaf2
- F. apic2

Answer: AC

NEW QUESTION 4

Which endpoint learning operation is completed on the egress leaf switch when traffic is received from an L3Out?

- A. The source MAC and IP address of the traffic is learned as a local endpoint.
- B. The source MAC address of the traffic is learned as a remote endpoint.
- C. No source MAC or IP address of the traffic is learned as a remote endpoint.
- D. The source IP address of the traffic is learned as a remote endpoint.

Answer: B

Explanation:

Reference: <https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c11-739989.html>

NEW QUESTION 5

What must be enabled in the bridge domain to have the endpoint table learn the IP addresses of endpoints?

- A. L2 unknown unicast: flood
- B. GARP based detection
- C. unicast routing
- D. subnet scope

Answer: C

Explanation:

Reference: <https://hsvglobalschool.in/dhkycw/cisco-aci-bridge-domain.html>

NEW QUESTION 6

Which two actions extend a Layer 2 domain beyond the ACI fabric? (Choose two.)

- A. extending the routed domain out of the ACI fabric
- B. creating a single homed Layer 3 Out
- C. creating an external physical network
- D. extending the bridge domain out of the ACI fabric
- E. extending the EPG out of the ACI fabric

Answer: AE

NEW QUESTION 7

On which two interface types should a user configure storm control to protect against broadcast traffic? (Choose two.)

- A. APIC facing interfaces
- B. port channel on a single leaf switch
- C. all interfaces on the leaf switches in the fabric
- D. endpoint-facing trunk interface
- E. fabric uplink interfaces on the leaf switches

Answer: BD

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/L2_config/b_Cisco_APIC_Layer_2_Configuration_Guide/b_Cisco_APIC_Layer_2_Configuration_Guide_chapter_01010.html

NEW QUESTION 8

Which two dynamic routing protocols are supported when using Cisco ACI to connect to an external Layer 3 network? (Choose two.)

- A. iBGP
- B. VXLAN
- C. IS-IS
- D. RIPv2
- E. eBGP

Answer: AE

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/ACI_Best_Practices/b_ACI_Best_Practices/b_ACI_Best_Practices_chapter_010010.html

NEW QUESTION 9

Refer to the exhibit.

Create vCenter Domain

Virtual Switch Name: Lab-VirtualSwitch

Virtual Switch: VMware vSphere Distributed Switch | Cisco AVS | Cisco AVE

Associated Attachable Entity Profile: Lab-ApplicationAttachableAccessEn

Delimiter:

Enable Tag Collection: ☐

Access Mode: Read Only Mode | Read Write Mode

Endpoint Retention Time (seconds): 0

VLAN Pool: select an option

Security Domains:

Name	Description
------	-------------

An engineer is integrating a VMware vCenter with Cisco ACI VMM domain configuration. ACI creates port-group names with the format of “Tenant | Application | EPG”. Which configuration option is used to generate port groups with names formatted as “Tenant=Application=EPG”?

- A. enable tag collection
- B. security domains
- C. delimiter
- D. virtual switch name

Answer: D

NEW QUESTION 10

When configuring Cisco ACI VMM domain integration with VMware vCenter, which object is created in vCenter?

- A. datacenter
- B. VMware vSphere Standard vSwitch
- C. VMware vSphere Distributed Switch
- D. cluster

Answer: C

NEW QUESTION 10

An engineer has set the VMM resolution immediacy to pre-provision in a Cisco ACI environment. No Cisco Discovery Protocol neighborship has been formed between the hypervisors and the ACI fabric leaf nodes. How does this affect the download policies to the leaf switches?

- A. No policies are downloaded because LLDP is the only supported discovery protocol.
- B. Policies are downloaded when the hypervisor host is connected to the VMM VDS.
- C. Policies are downloaded to the ACI leaf switch regardless of Cisco Discovery Protocol neighborship.
- D. No policies are downloaded because there is no discovery protocol neighborship.

Answer: C

NEW QUESTION 13

Which tenant is used when configuring in-band management IP addresses for Cisco APICs, leaf nodes, and spine nodes?

- A. default
- B. infra
- C. common
- D. mgmt

Answer: D

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/kb/b_KB_Configuring_Static_Management_Access.html#concept_CFF63FEBE947424291B0F10E6F23DA7D

NEW QUESTION 15

Refer to the exhibit.

Edit Stats Threshold

transmit B2B credit cumulative

Normal Value:

Threshold Direction: Both Rising Falling

Rising Thresholds to Config: ☒ ☐

- ☒ Critical
- ☐ Major
- ☐ Minor
- ☒ Warning

Rising

Set

Reset

Critical

Major

Minor

Warning

A client reports that the ACI domain connectivity to the fiber channel storage is experiencing a B2B credit oversubscription. The environment has a SYSLOG server for state collection messages. Which value should be chosen to clear the critical fault?

- A. 300
- B. 410
- C. 350
- D. 510

Answer: B

NEW QUESTION 17

Which statement about ACI syslog is true?

- A. Notifications for different scopes of syslog objects can be sent only to one destination.
- B. Syslog messages are sent to the destination through the spine.
- C. All syslog messages are sent to the destination through APIC.
- D. Switches send syslog messages directly to the destinations.

Answer: A

Explanation:

Reference: <https://www.ciscolive.com/c/dam/r/ciscolive/us/docs/2016/pdf/BRKACI-2303.pdf>

NEW QUESTION 21

Which protocol does ACI use to securely sane the configuration in a remote location?

- A. SCP
- B. HTTPS
- C. TFTP
- D. FTP

Answer: A

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/kb/b_KB_Using_Import_Export_to_Recover_Config_States.html

NEW QUESTION 24

Which two protocols support accessing backup files on a remote location from the APIC? (Choose two.)

- A. TFTP
- B. FTP
- C. SFTP

- D. SMB
- E. HTTPS

Answer: BC

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/troubleshooting/b_APIC_Troubleshooting/b_APIC_Troubleshooting_appendix_010011.html

NEW QUESTION 26

In the context of ACI Multi-Site, when is the information of an endpoint (MAC/IP) that belongs to site 1 advertised to site 2 using the EVPN control plane?

- A. Endpoint information is not exchanged across sites unless COOP protocol is used.
- B. Endpoint information is not exchanged across sites unless a policy is configured to allow communication across sites.
- C. Endpoint information is exchanged across sites as soon as the endpoint is discovered in one site.
- D. Endpoint information is exchanged across sites when the endpoints are discovered in both sites.

Answer: A

Explanation:

Reference: <https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c11-739609.html#CiscoACIMultiSiteoverlaydataplane>

NEW QUESTION 27

What are two requirements for the IPN network when implementing a Multi-Pod ACI fabric? (Choose two.)

- A. EIGRP routing
- B. PIM ASM multicast routing
- C. BGP routing
- D. VLAN ID 4
- E. OSPF routing

Answer: AE

NEW QUESTION 32

A Solutions Architect is asked to design two data centers based on Cisco ACI technology that can extend L2/L3, VXLAN, and network policy across locations. ACI Multi-Pod has been selected. Which two requirements must be considered in this design? (Choose two.)

- A. ACI underlay protocols, i.
- B. COOP, IS-IS and MP-BGP, spans across pod
- C. Create QoS policies to make sure those protocols have higher priority.
- D. A single APIC Cluster is required in a Multi-Pod design
- E. It is important to place the APIC Controllers in different locations in order to maximize redundancy and reliability.
- F. ACI Multi-Pod requires an IP Network supporting PIM-Bidir.
- G. ACI Multi-Pod does not support Firewall Clusters across Pod
- H. Firewall Clusters should always be local.
- I. Multi-Pod requires multiple APIC Controller Clusters, one per pod
- J. Make sure those clusters can communicate to each other through a highly available connection.

Answer: AE

NEW QUESTION 34

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your 300-620 Exam with Our Prep Materials Via below:

<https://www.certleader.com/300-620-dumps.html>