



Juniper

Exam Questions JN0-351

Enterprise Routing and Switching - Specialist (JNCIS-ENT)

About ExamBible

Your Partner of IT Exam

Found in 1998

ExamBible is a company specialized on providing high quality IT exam practice study materials, especially Cisco CCNA, CCDA, CCNP, CCIE, Checkpoint CCSE, CompTIA A+, Network+ certification practice exams and so on. We guarantee that the candidates will not only pass any IT exam at the first attempt but also get profound understanding about the certificates they have got. There are so many alike companies in this industry, however, ExamBible has its unique advantages that other companies could not achieve.

Our Advances

* 99.9% Uptime

All examinations will be up to date.

* 24/7 Quality Support

We will provide service round the clock.

* 100% Pass Rate

Our guarantee that you will pass the exam.

* Unique Gurantee

If you do not pass the exam at the first time, we will not only arrange FULL REFUND for you, but also provide you another exam of your claim, ABSOLUTELY FREE!

NEW QUESTION 1

You are attempting to configure the initial two aggregated Ethernet interfaces on a router but there are no aggregated Ethernet interfaces available. In this scenario, which configuration will enable these interfaces on this router?

A)

```
user@router# show chassis
aggregated-devices {
    ethernet {
        lacp {
            system-priority 10;
        }
    }
}
```

B)

```
user@router# show chassis
aggregated-devices {
    ethernet {
        device-count 10;
    }
}
```

C)

```
user@router# show chassis
maximum-ecmp 16;
aggregated-devices {
    ethernet {
        device-count 1;
    }
}
```

D)

```

user@router# show chassis
aggregated-devices {
  ethernet {
    device-count 1;
  }
}

```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: C

Explanation:

The correct answer to your question is C. Option C. Here is why:

? Option C shows the configuration of the chassis statement, which defines the properties of the router chassis, such as the number of aggregated Ethernet interfaces, the number of FPCs, and the number of PICs1.


? To enable aggregated Ethernet interfaces on a router, you need to specify the aggregated-devices statement under the chassis statement and set the ethernet parameter to the desired number of interfaces2. For example, to enable two aggregated Ethernet interfaces, you can use the following configuration: chassis { aggregated-devices { ethernet { device-count 2; } } }

? Option C shows this configuration with the device-count set to 2, which will enable two aggregated Ethernet interfaces on the router. The other options do not show this configuration and will not enable any aggregated Ethernet interfaces on the router.

? Therefore, option C is the correct answer to your question.

NEW QUESTION 2

Exhibit

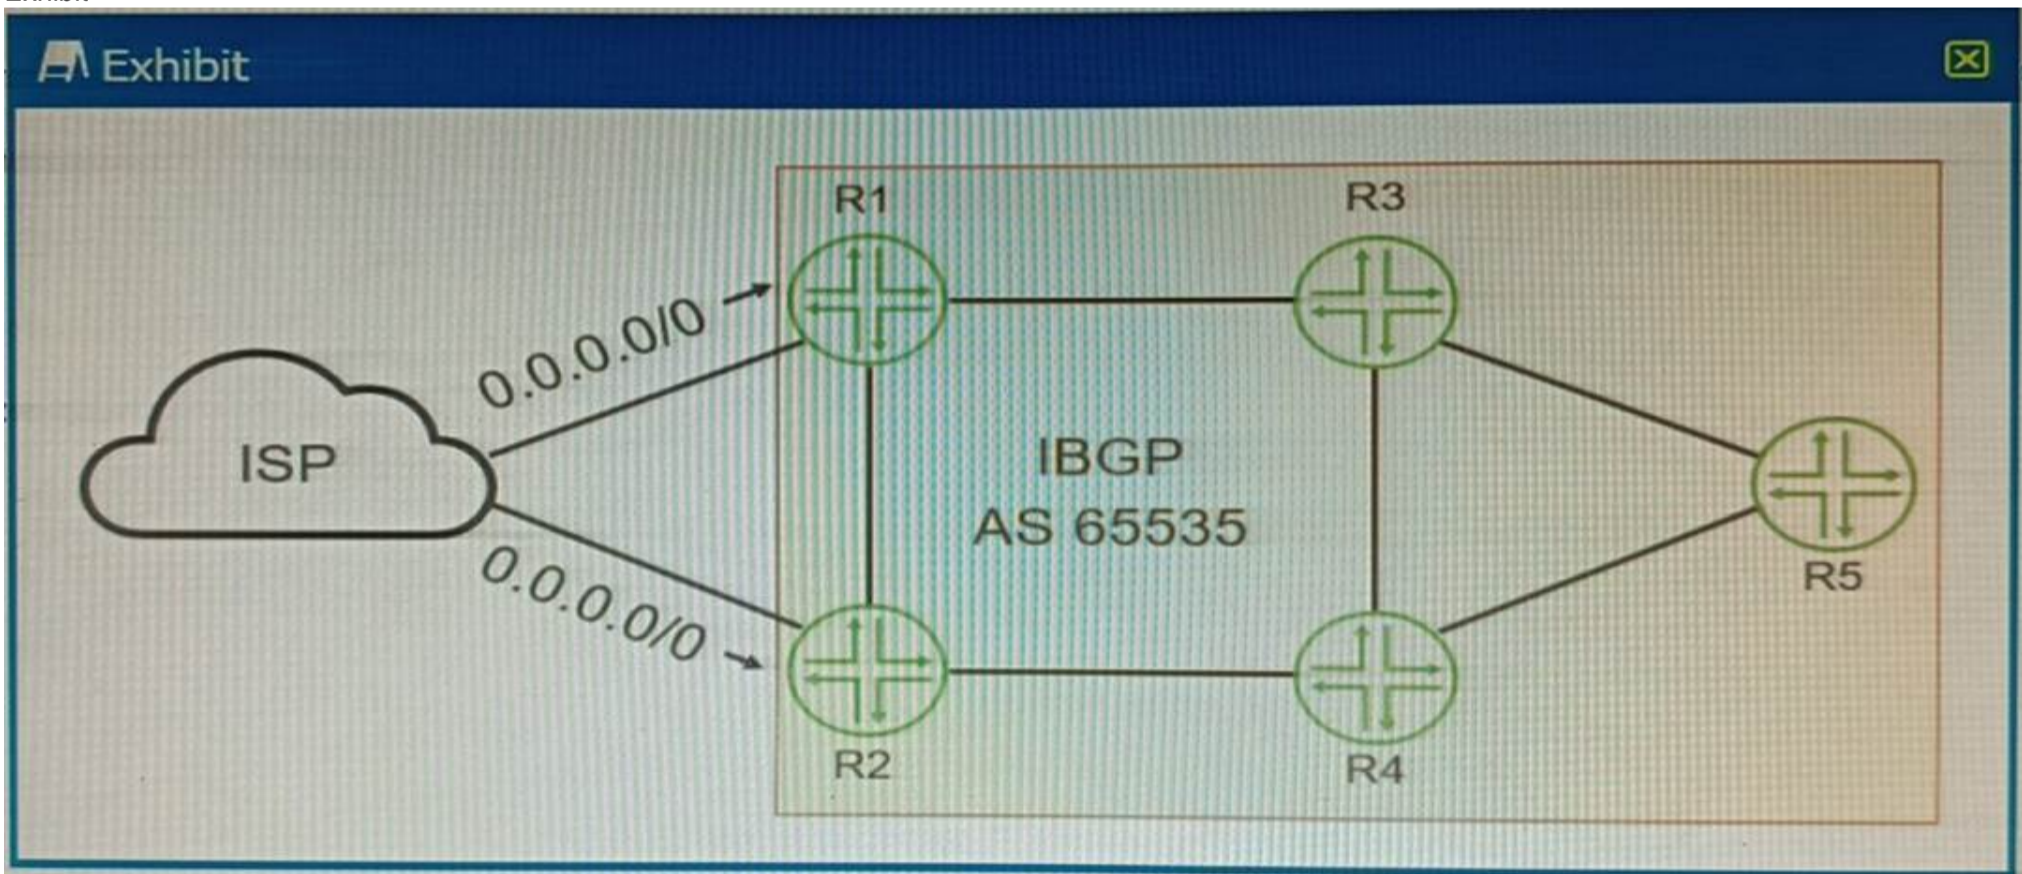

Your ISP is announcing a default route to both R1 and R2. You want your network routers to forward all Internet traffic through the R1 device. Which BGP attribute would you use?

- A. MED
- B. next-hop
- C. local preference
- D. origin

Answer: C


Explanation:

The BGP attribute that you would use to forward all Internet traffic through the R1 device is the local preference1.

The local preference is an attribute that is used within an autonomous system (AS) and exchanged between iBGP routers. It is used to select an exit point from the AS. The path with the highest local preference is preferred. By setting a higher local preference for the routes received from R1, you can make R1 the preferred exit point for all Internet traffic.

NEW QUESTION 3

Exhibit.

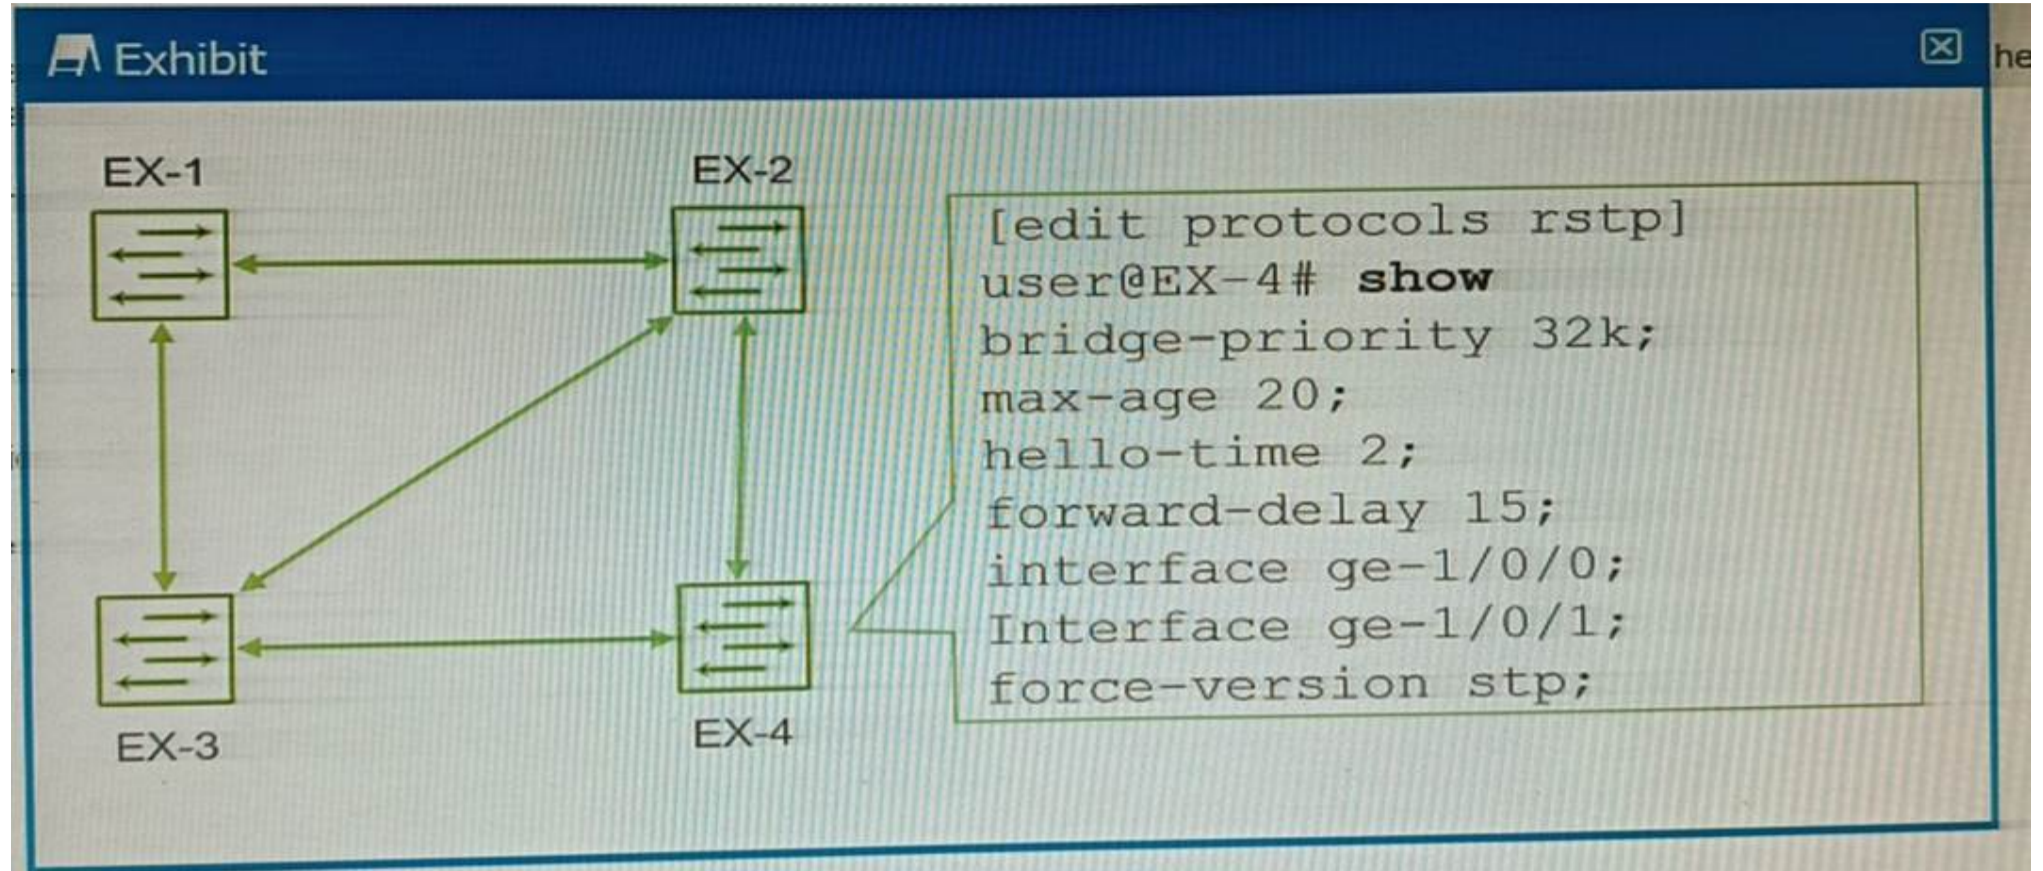

You have configured the four EX Series switches with RSTP, as shown in the exhibit. You discover that whenever a link between switches goes up or down, the switches take longer than expected for RSTP to converge, using the default settings. In this scenario, which action would solve the delay in RSTP convergence?

- A. The hello-time must be increased.
- B. The force-version must be removed.
- C. The bridge priority for EX-4 must be set at 4000.
- D. The max-age must be increased to 20

Answer: B

Explanation:

? The exhibit shows the configuration of RSTP on EX-4, which has the command `force-version stp`. This command forces the switch to use the legacy STP protocol instead of RSTP. This means that EX-4 will not be able to take advantage of the faster convergence and enhanced features of RSTP, such as edge ports, link type, and proposal/agreement sequence.

? The other switches in the network are likely to be running RSTP, as it is the default protocol for EX Series switches. Therefore, there will be a compatibility issue between EX-4 and the other switches, which will result in longer convergence times and suboptimal performance. The switch will also generate a warning message that says `Warning: STP version mismatch with neighbor` when it receives a BPDU from a RSTP neighbor.

? To solve this problem, the `force-version` command must be removed from EX-4, so that it can run RSTP natively and interoperate with the other switches in the network. This will enable faster convergence and better stability for the network topology. To remove the command, you can use the `delete protocols rstp force-version` command in configuration mode.

NEW QUESTION 4

You are receiving multiple BGP routes from an upstream neighbor and only want to advertise a single summarized prefix to your internal OSPF neighbors. This route should only be advertised when you are receiving these BGP routes from this neighbor. In this scenario, which type of route should you create?

- A. aggregate route
- B. static route using the resolve feature
- C. generate route
- D. static route using qualified next hops

Answer: A

Explanation:

In this scenario, you should create an aggregate route. Aggregate routes are used for advertising summarized network prefixes. They help minimize the number of routing tables in an IP network by consolidating selected multiple routes into a single route advertisement. This approach is in contrast to non-aggregation routing, in which every routing table contains a unique entry for each route.

Therefore, option A is correct. Options B, C, and D are not correct because:


? Static route using the resolve feature: This type of route uses the resolve feature to install a static route in the routing table only if a specific condition is met. However, it does not provide the capability to summarize multiple routes into a single prefix.

? Generate route: This type of route generates a route that is always present in the routing table and can be used to summarize routes. However, it does not have the capability to only advertise the route when specific BGP routes are being received from a neighbor.

? Static route using qualified next hops: This type of route allows for the specification of multiple next-hop addresses for a static route. However, it does not provide the capability to summarize multiple routes into a single prefix.

NEW QUESTION 5

Exhibit

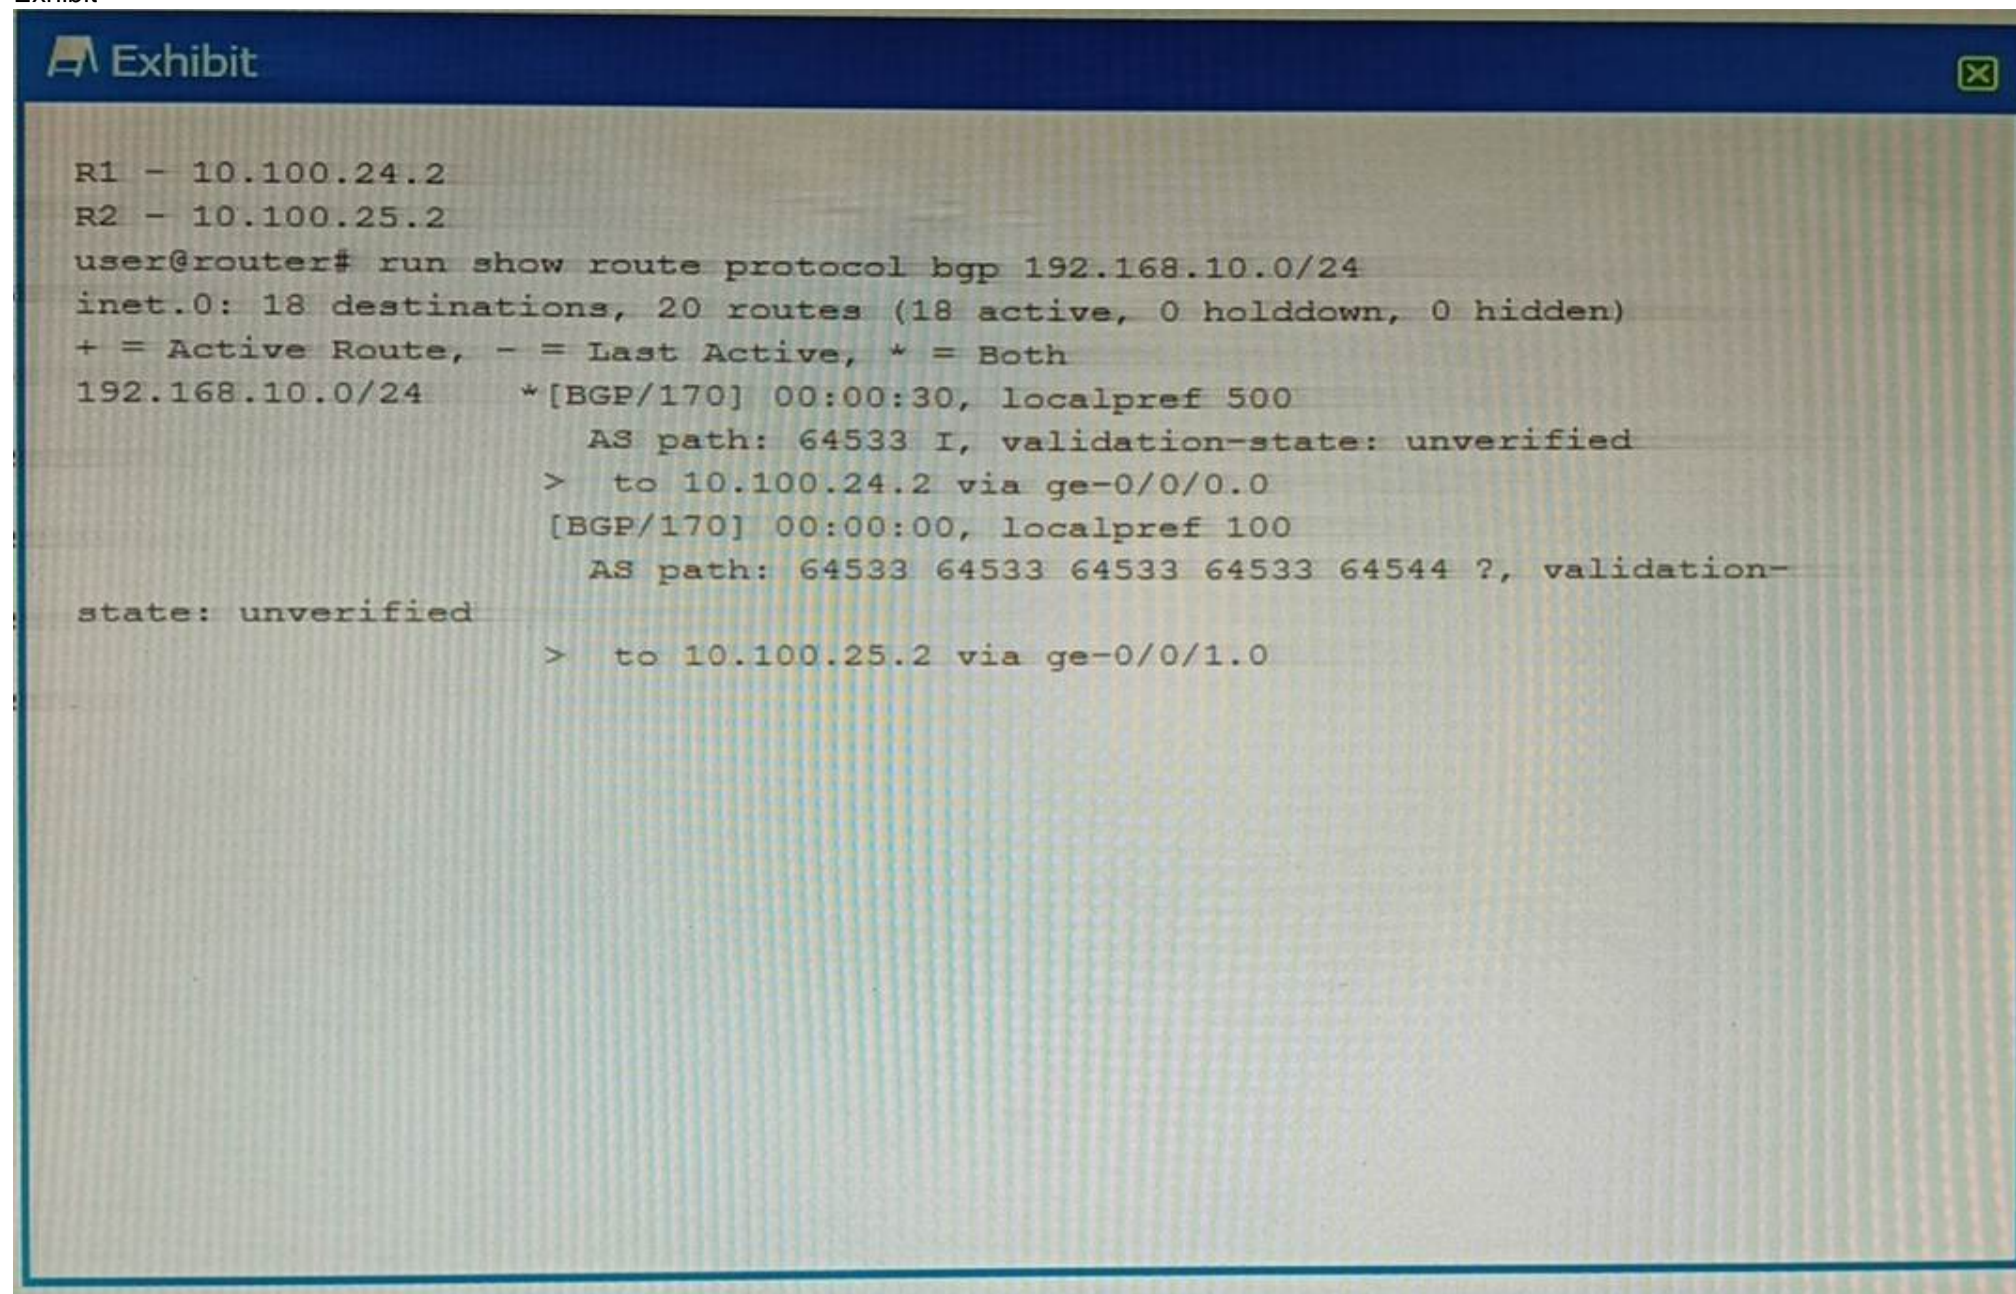

```

R1 - 10.100.24.2
R2 - 10.100.25.2
user@router# run show route protocol bgp 192.168.10.0/24
inet.0: 18 destinations, 20 routes (18 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
192.168.10.0/24    * [BGP/170] 00:00:30, localpref 500
                  AS path: 64533 I, validation-state: unverified
                  > to 10.100.24.2 via ge-0/0/0.0
                  [BGP/170] 00:00:00, localpref 100
                  AS path: 64533 64533 64533 64533 64544 ?, validation-
state: unverified
                  > to 10.100.25.2 via ge-0/0/1.0
    
```

You are troubleshooting an issue where traffic to 192.168.10.0/24 is being sent to R1 instead of your desired path through R2. Referring to the exhibit, what is the reason for the problem?

- A. R2's route is not the best path due to loop prevention.
- B. R2's route is not the best path due to a lower origin code.
- C. R1's route is the best path due to a higher local preference
- D. R1's route is the best path due to the shorter AS path.

Answer: C

Explanation:

? The exhibit shows the output of the command show ip bgp, which displays information about the BGP routes in the routing table1. The output shows two routes for the destination 192.168.10.0/24, one from R1 and one from R2.

? The route from R1 has a local preference of 200, while the route from R2 has a local preference of 100. Local preference is a BGP attribute that indicates the degree of preference for a route within an autonomous system (AS)2. A higher local preference means a more preferred route2.

? BGP uses a best path selection algorithm to choose the best route for each destination among multiple paths. The algorithm compares different attributes of the routes in a specific order of precedence3. The first attribute that is compared is weight, which is a Cisco-specific attribute that is local to the router3. If the weight is equal or not set, the next attribute that is compared is local preference3.

? In this case, both routes have the same weight of 0, which means that they are learned from external BGP (eBGP) peers3. Therefore, the next attribute that is compared is local preference. Since R1's route has a higher local preference than R2's route, it is chosen as the best path and installed in the routing table3. The other attributes, such as origin code and AS path, are not considered in this case.

NEW QUESTION 6

In RSTP, which three port roles are associated with the discarding state? (Choose three.)

- A. root
- B. backup
- C. alternate
- D. disabled
- E. designated

Answer: BCD

Explanation:

In Rapid Spanning Tree Protocol (RSTP), there are several port roles that determine the behavior of the port in the spanning tree123. The roles include root, designated, alternate, backup, and disabled123.

The discarding state is associated with the backup, alternate, and disabled roles123. In a stable topology with consistent port roles throughout the network, RSTP ensures that every root port and designated port immediately transition to the forwarding state while all alternate and backup ports are always in the discarding state2. Disabled ports are also in the discarding state3.

Therefore, options B, C, and D are correct.

NEW QUESTION 7

You are an operator for a network running IS-IS. Two routers are failing to form an adjacency. What are two reasons for this problem? (Choose two.)

- A. There are mismatched router IDs on the L2 routers.
- B. There is no configured ISO address on any IS-IS interface.
- C. There is a mismatched area ID between the L2 routers.
- D. The family iso configuration is missing from the adjacency interface.

Answer: BD

Explanation:

The two reasons for the failure to form an adjacency in a network running IS-IS could be:

* B. There is no configured ISO address on any IS-IS interface. IS-IS requires each router interface to have an ISO address configured. Without this address, the routers cannot form an adjacency.

* D. The family iso configuration is missing from the adjacency interface. The family iso configuration is essential for IS-IS to function correctly. If this configuration is missing from the adjacency interface, it could prevent the formation of an adjacency.

These explanations are based on the Enterprise Routing and Switching Specialist (JNCIS-ENT) documents and learning resources available at Juniper Networks.

NEW QUESTION 8

You implemented the MAC address limit feature with the shutdown action on all interfaces on your switch. In this scenario, which statement is correct when a violation occurs?

- A. By default, you must manually clear the violation for the interface to send and receive traffic again.
- B. By default, the violation will automatically be cleared after 300 seconds and the interface will resume sending and receiving traffic for all learned devices.
- C. By default, devices that are learned before the violation occurs are still allowed to send and receive traffic through the specific interface.
- D. By default, the interface will continue to send and receive traffic for all connected devices after a violation has occurred.

Answer: A

Explanation:

When the MAC address limit feature with the shutdown action is implemented on a switch, if a violation occurs, the interface is disabled and a system log entry is generated. If the switch has been configured with the port-error-disable statement, the disabled interface recovers automatically upon expiration of the specified disable timeout. However, if the switch has not been configured for auto-recovery from port error disabled conditions, you must manually clear the violation by running the clear ethernet-switching port-error command for the interface to send and receive traffic again. This explanation is based on the Enterprise Routing and Switching Specialist (JNCIS-ENT) documents and learning resources available at Juniper Networks.

NEW QUESTION 9

An update to your organization's network security requirements document requires management traffic to be isolated in a non-default routing-instance. You want to implement this requirement on your Junos-based devices. Which two commands enable this behavior? (Choose two.)

- A. set routing-instances mgmt interface ge-0/0/0.0
- B. set routing-instances mgmt_junos interface em1
- C. set system management-instance
- D. set routing-instances mgmt_junos

Answer: CD

Explanation:

To isolate management traffic in a non-default routing-instance on Junos-based devices, you can use the set system management-instance and set routing-instances mgmt_junos commands.

? set system management-instance: This command associates the management interface (usually named fxp0 or em0 for Junos OS, or re0:mgmt-* or re1:mgmt-* for Junos OS Evolved) with the non-default virtual routing and forwarding (VRF) instance. After you configure the non-default management VRF instance, management traffic no longer has to share a routing table with other control traffic or protocol traffic.

? set routing-instances mgmt_junos: This command creates a new routing instance named mgmt_junos. The name of the dedicated management VRF instance is reserved and hardcoded as mgmt_junos; you cannot configure any other routing instance by the name mgmt_junos.

Therefore, options C and D are correct. Options A and B are not correct because they attempt to assign an interface to the mgmt_junos routing instance, which is not necessary for isolating management traffic.

NEW QUESTION 10

You are concerned about spoofed MAC addresses on your LAN. Which two Layer 2 security features should you enable to minimize this concern? (Choose two.)

- A. dynamic ARP inspection
- B. IP source guard
- C. DHCP snooping
- D. static ARP

Answer: AC

Explanation:

? A is correct because dynamic ARP inspection (DAI) is a Layer 2 security feature that prevents ARP spoofing attacks. ARP spoofing is a technique that allows an attacker to send fake ARP messages to associate a spoofed MAC address with a legitimate IP address. This can result in traffic redirection, man-in-the-middle attacks, or denial-of-service attacks. DAI validates ARP packets by checking the source MAC address and IP address against a trusted database, which is usually built by DHCP snooping. DAI discards any ARP packets that do not match the database or have invalid formats.

? C is correct because DHCP snooping is a Layer 2 security feature that prevents DHCP spoofing attacks. DHCP spoofing is a technique that allows an attacker to act as a rogue DHCP server and offer fake IP addresses and other network parameters to unsuspecting clients. This can result in traffic redirection, man-in-the-

middle attacks, or denial-of-service attacks. DHCP snooping filters DHCP messages by classifying switch ports as trusted or untrusted. Trusted ports are allowed to send and receive any DHCP messages, while untrusted ports are allowed to send only DHCP requests and receive only valid DHCP replies from trusted ports². DHCP snooping also builds a database of MAC addresses, IP addresses, lease times, and binding types for each client².

NEW QUESTION 10

What is a purpose of using a spanning tree protocol?

- A. to look up MAC addresses
- B. to eliminate broadcast storms
- C. to route IP packets
- D. to tunnel Ethernet frames

Answer: B

Explanation:

? A broadcast storm is a network condition where a large number of broadcast packets are sent and received by multiple devices, causing congestion and performance degradation¹. A broadcast storm can occur when there are loops in the network topology, meaning that there are multiple paths between two devices².

? A spanning tree protocol is a network protocol that prevents loops from being formed when switches or bridges are interconnected via multiple paths. It does this by creating a logical tree structure that spans all the devices in the network, and disabling or blocking the links that are not part of the tree, leaving a single active path between any two devices³.

? By eliminating loops, a spanning tree protocol also eliminates broadcast storms, as broadcast packets will not be forwarded endlessly along the looped paths. Instead, broadcast packets will be sent only along the tree structure, reaching each device once and avoiding congestion³.

NEW QUESTION 15

Which statement is correct about the storm control feature?

- A. The storm control feature is enabled in the factory-default configuration on EX Series switches.
- B. The storm control feature requires a special license on EX Series switches.
- C. The storm control feature is not supported on aggregate Ethernet interfaces.
- D. The storm control configuration only applies to traffic being sent between the forwarding and control plane.

Answer: A

Explanation:

? Option A is correct. The storm control feature is enabled in the factory-default configuration on EX Series switches¹². On EX2200, EX3200, EX3300, EX4200, and EX6200 switches, the factory default configuration enables storm control for broadcast and unknown unicast traffic on all switch interfaces². On EX4300 switches, the factory default configuration enables storm control on all Layer 2 switch interfaces¹.

? Option B is incorrect. The storm control feature does not require a special license on EX Series switches³⁴.

? Option C is incorrect. There's no information available that suggests the storm control feature is not supported on aggregate Ethernet interfaces.

? Option D is incorrect. The storm control configuration applies to traffic at the ingress of an interface⁵, not just between the forwarding and control plane.

NEW QUESTION 18

Which two statements correctly describe RSTP port roles? (Choose two.)

- A. The designated port forwards data to the downstream network segment or device.
- B. The backup port is used as a backup for the root port.
- C. The alternate port is a standby port for an edge port.
- D. The root port is responsible for forwarding data to the root bridge.

Answer: AD

Explanation:

In Rapid Spanning Tree Protocol (RSTP), there are several port roles that determine the behavior of the port in the spanning tree¹.

Option A suggests that the designated port forwards data to the downstream network segment or device. This is correct because the designated port is the port on a network segment that has the best path to the root bridge¹. It's responsible for forwarding frames towards the root bridge and sending configuration messages into its segment¹.

Option D suggests that the root port is responsible for forwarding data to the root bridge. This is also correct because the root port is always the link directly connected to the root bridge, or the shortest path to the root bridge¹. It's used to forward traffic towards the root bridge¹.

Therefore, options A and D are correct.

NEW QUESTION 21

Exhibit

```

{master:0}
user@switch> show vlans brief
Routing instance      VLAN name      Tag      Interfaces
default-switch      default      1      ge-0/0/0.0*
                    ge-0/0/1.0*
                    ge-0/0/2.0*
                    ge-0/0/3.0*
                    ge-0/0/4.0*
                    ge-0/0/5.0*
    
```

What does the * indicate in the output shown in the exhibit?

- A. The switch ports have a router attached.
- B. The interface is down.
- C. The interface is active.
- D. All interfaces have elected a root bridge.

Answer: C

Explanation:


? The exhibit shows the output of the command show vlans brief, which displays brief information about VLANs and their associated interfaces1.

? The output has four columns: Routing instance, VLAN name, Interfaces, and Tagging.

? The * symbol indicates that the interface is active, meaning that it is up and forwarding traffic1. This can be verified by the command show interfaces terse, which displays the status of the interfaces2.

NEW QUESTION 23

Exhibit.

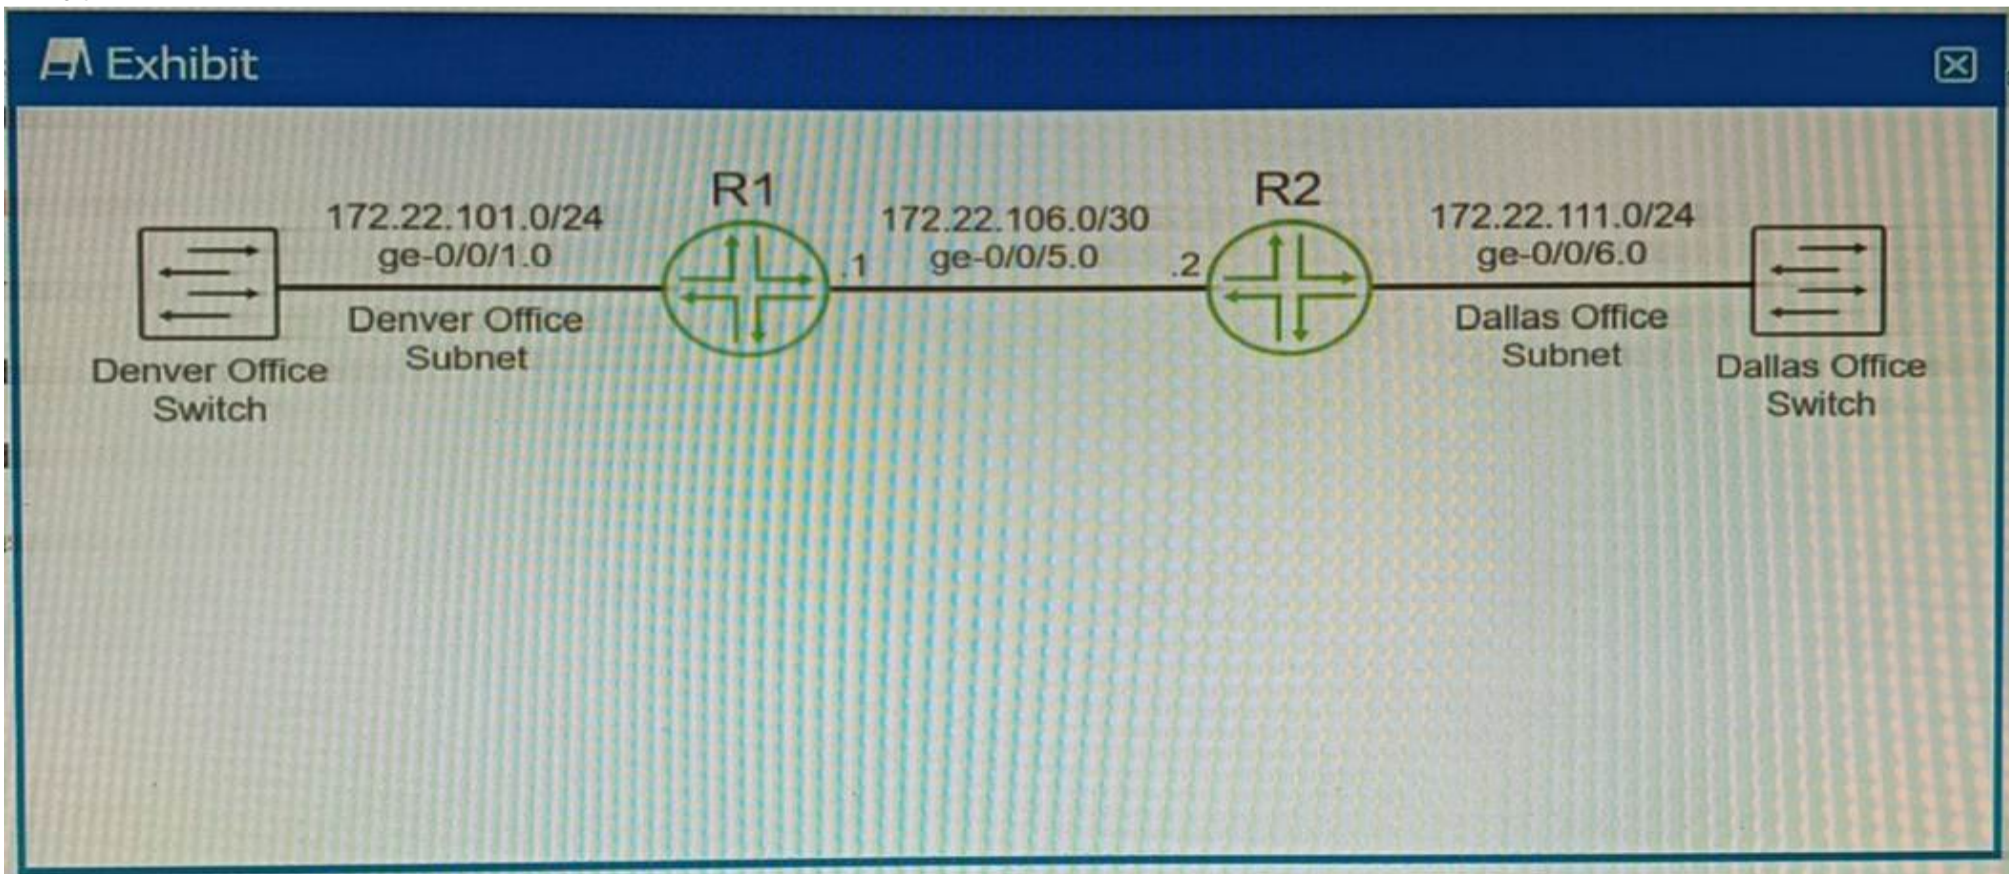

You are using OSPF to advertise the subnets that are used by the Denver and Dallas offices. The routers that are directly connected to the Dallas and Denver subnets are not advertising the connected subnets. Referring to the exhibit, which two statements are correct? (Choose two.)

- A. Create static routes on the switches using the local vMX router's loopback interface for the next hop.
- B. Configure and apply a routing policy that redistributes the Dallas and Denver subnets using Type 5 LSAs.
- C. Configure and apply a routing policy that redistributes the connected Dallas and Denver subnets.
- D. Enable the passive option on the OSPF interfaces that are connected to the Dallas and Denver subnets.

Answer: CD

Explanation:

The routers that are directly connected to the Dallas and Denver subnets are not advertising the connected subnets. This can be resolved by redistributing the connected subnets into OSPF1. Option C suggests to configure and apply a routing policy that redistributes the connected Dallas and Denver subnets. This is correct because redistribution allows routes from one routing protocol to be communicated to another, and in this case, it allows the connected subnets to be advertised through OSPF1. Option D suggests enabling the passive option on the OSPF interfaces that are connected to the Dallas and Denver subnets. This is also correct because in OSPF, a passive interface is an interface that belongs to the OSPF router, but does not send OSPF Hello packets1. It's typically used on an interface that you don't want to use for OSPF adjacencies, but you still want to advertise its IP address1. Therefore, enabling passive interface can help in advertising the Dallas and Denver subnets.

NEW QUESTION 27

What are two reasons for creating multiple areas in OSPF? (Choose two.)

- A. to reduce the convergence time
- B. to increase the number of adjacencies in the backbone
- C. to increase the size of the LSDB
- D. to reduce LSA flooding across the network

Answer: AD

Explanation:

Option A is correct. Creating multiple areas in OSPF can help to reduce the convergence time. This is because changes in one area do not affect other areas, so fewer routers need to run the SPF algorithm in response to a change. Option D is correct. Creating multiple areas in OSPF can help to reduce Link State Advertisement (LSA) flooding across the network. This is because LSAs are not flooded out of their area of origin.

NEW QUESTION 31

Which two statements are true about the default VLAN on Juniper switches? (Choose two.)

- A. The default VLAN is set to a VLAN ID of 1 by default
- B. The default VLAN ID is not assigned to any interface.
- C. The default VLAN ID is not visible.
- D. The default VLAN ID can be changed.

Answer: AD

Explanation:

On Juniper switches, the default VLAN is set to a VLAN ID of 1 by default12. This means that all interfaces on the switch are members of VLAN 1 until they are specifically assigned to another VLAN12. Therefore, option A is correct. The default VLAN ID can be changed12. This allows network administrators to configure the switch to use a different VLAN as the default, if necessary12. Therefore, option D is correct.

NEW QUESTION 32

Which statement is correct about graceful Routing Engine switchover (GRES)?

- A. The PFE restarts and the kernel and interface information is lost.
- B. GRES has a helper mode and a restarting mode.
- C. When combined with NSR, routing is preserved and the new master RE does not restart rpd.
- D. With no other high availability features enabled, routing is preserved and the new master RE does not restart rpd.

Answer: C

Explanation:


The Graceful Routing Engine Switchover (GRES) feature in Junos OS enables a router with redundant Routing Engines to continue forwarding packets, even if one Routing Engine fails1. GRES preserves interface and kernel information, ensuring that traffic is not interrupted1. However, GRES does not preserve the control plane1.

To preserve routing during a switchover, GRES must be combined with either Graceful Restart protocol extensions or Nonstop Active Routing (NSR)1. When GRES is combined with NSR, nearly 75 percent of line rate worth of traffic per Packet Forwarding Engine remains uninterrupted during GRES1. Any updates to the primary Routing Engine are replicated to the backup Routing Engine as soon as they occur1.

Therefore, when GRES is combined with NSR, routing is preserved and the new master RE does not restart rpd1.

NEW QUESTION 35

Exhibit

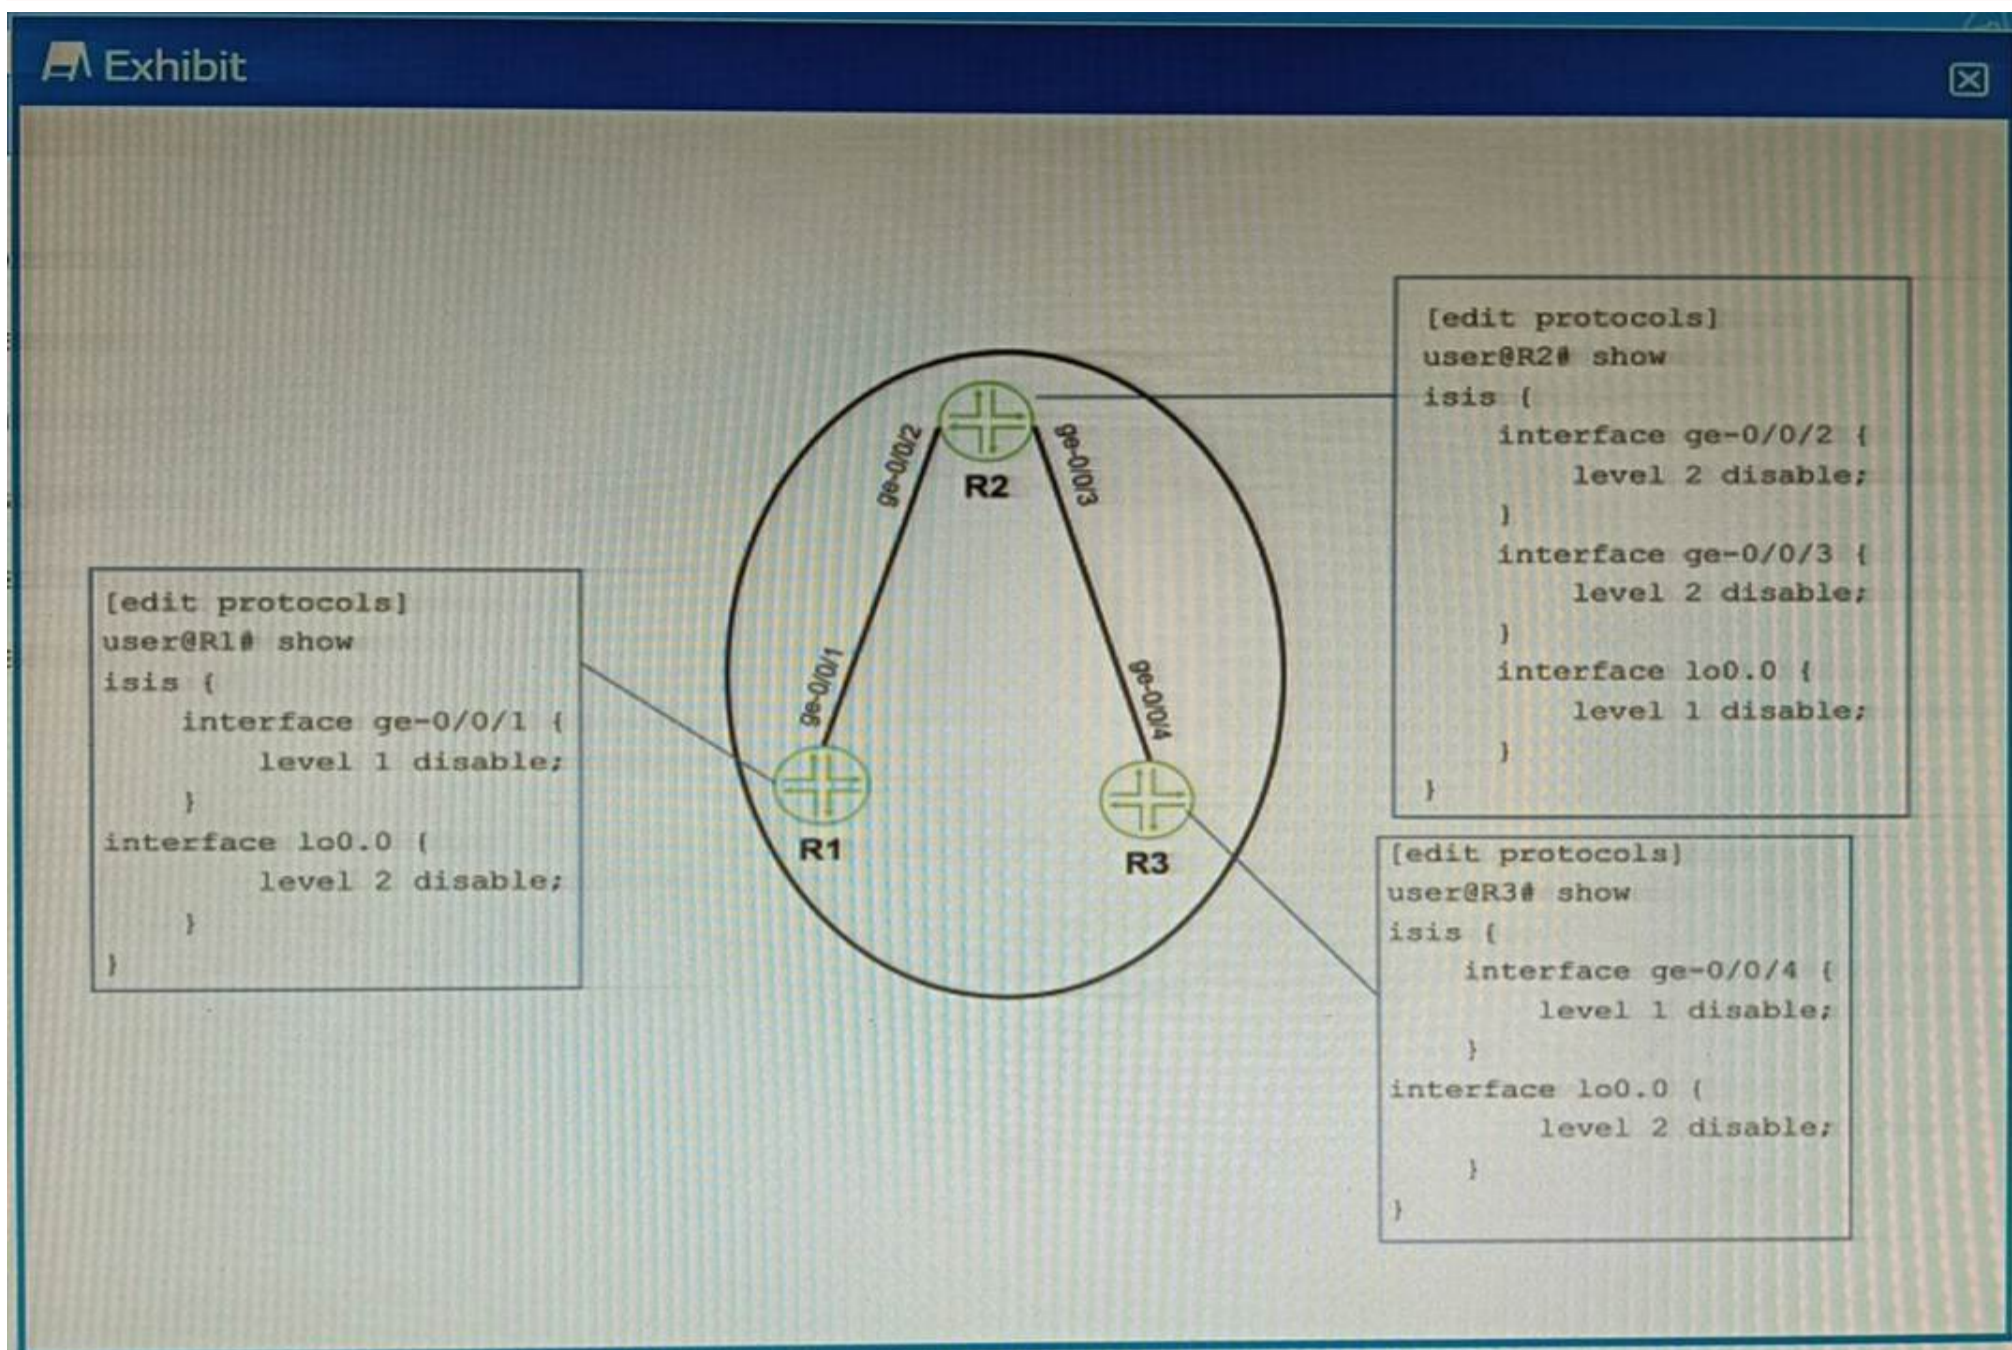

Referring to the exhibit, which two configuration changes must you apply for packets to reach from R1 to R3 using IS-IS? (Choose two.)

- A. On R1, enable Level 1 on the ge-0/0/1 interface.
- B. On R3 disable Level 2 on the ge-0/0/4 interface.
- C. On R1, disable Level 2 on the ge-0/0/1 interface.
- D. On R3 enable Level 1 on the ge-0/0/4 interface

Answer: AD

Explanation:

A. On R1, enable Level 1 on the ge-0/0/1 interface. In IS-IS, both levels (Level 1 and Level 2) are enabled by default when you enable IS-IS on an interface. Level 1 systems route within an area. If the destination is outside an area, Level 1 systems route toward a Level 2 system. Therefore, enabling Level 1 on the ge-0/0/1 interface on R1 would allow packets to reach from R1 to R3.

* D. On R3 enable Level 1 on the ge-0/0/4 interface. Similarly, enabling Level 1 on the ge-0/0/4 interface on R3 would allow packets to reach from R1 to R3. These explanations are based on the IS-IS configuration documents and learning resources available at Juniper Networks and Cisco.

NEW QUESTION 36

.....

Relate Links

100% Pass Your JN0-351 Exam with ExamBible Prep Materials

<https://www.exambible.com/JN0-351-exam/>

Contact us

We are proud of our high-quality customer service, which serves you around the clock 24/7.

Viste - <https://www.exambible.com/>