

Oracle

Exam Questions 1Z0-071

Oracle Database 12c SQL



NEW QUESTION 1

In which normal form is a table, if it has no multi-valued attributes and no partial dependencies?

- A. second normal form
- B. first normal form
- C. third normal form
- D. fourth normal form

Answer: A

Explanation:

References:

<https://blog.udemy.com/database-normal-forms/>

NEW QUESTION 2

You issue this command which succeeds: SQL> DROP TABLE products;
 Which three statements are true?

- A. All existing views and synonyms that refer to the table are invalidated but retained.
- B. Any uncommitted transaction in the session is committed.
- C. Table data and the table structure are deleted.
- D. All the table's indexes if any exist, are invalidated but retained.
- E. Table data is deleted but the table structure is retained.

Answer: BCD

NEW QUESTION 3

You are designing the structure of a table in which two columns have the specifications:

COMPONENT_ID – must be able to contain a maximum of 12 alphanumeric characters and uniquely identify the row

EXECUTION_DATETIME – contains Century, Year, Month, Day, Hour, Minute, Second to the maximum precision and is used for calculations and comparisons between components.


Which two options define the data types that satisfy these requirements most efficiently?

- A. The EXECUTION_DATETIME must be of INTERVAL DAY TO SECOND data type.
- B. The EXECUTION_DATETIME must be of TIMESTAMP data type.
- C. The EXECUTION_DATETIME must be of DATE data type.
- D. The COMPONENT_ID must be of ROWID data type.
- E. The COMPONENT_ID must be of VARCHAR2 data type.
- F. The COMPONENT_ID column must be of CHAR data type.

Answer: CF

NEW QUESTION 4

View the Exhibit and examine the structure of the EMPLOYEES and JOB_HISTORY tables. (Choose all that apply.)

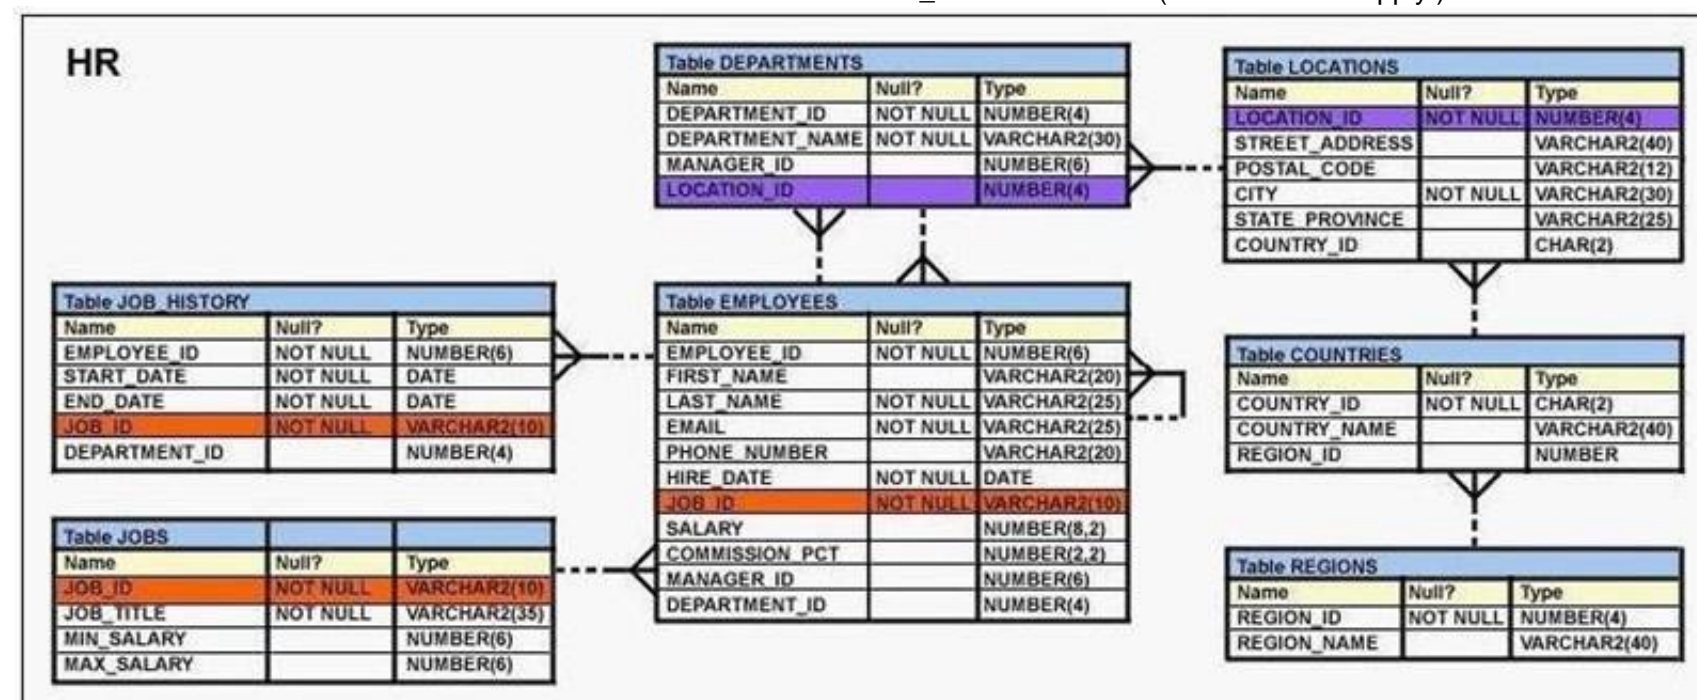

Examine this query which must select the employee IDs of all the employees who have held the job SA_MAN at any time during their employment.

SELECT EMPLOYEE_ID FROM EMPLOYEES WHERE JOB_ID = 'SA_MAN'

----- SELECT EMPLOYEE_ID FROM JOB_HISTORY WHERE JOB_ID = 'SA_MAN';

Choose two correct SET operators which would cause the query to return the desired result.

- A. UNION
- B. MINUS
- C. INTERSECT
- D. UNION ALL

Answer: AD

NEW QUESTION 5

Which two statements are true regarding the COUNT function?

- A. A SELECT statement using the COUNT function with a DISTINCT keyword cannot have a WHERE clause.
- B. COUNT (DISTINCT inv_amt) returns the number of rows excluding rows containing duplicates and NULL values in the INV_AMT column.
- C. COUNT (cust_id) returns the number of rows including rows with duplicate customer IDs and NULL value in the CUST_ID column.
- D. COUNT (*) returns the number of rows including duplicate rows and rows containing NULL value in any of the columns.
- E. The COUNT function can be used only for CHAR, VARCHAR2, and NUMBER data types.

Answer: BD

NEW QUESTION 6

View the Exhibit and examine the details of the PRODUCT_INFORMATION table.

PRODUCT_NAME	CATEGORY_ID	SUPPLIER_ID
Inkjet C/B/HQ	12	102094
Inkjet C/4	12	102090
LaserPro 600/6/BW	12	102087
LaserPro 1200/8/BW	12	102099
Inkjet B/6	12	102096
Industrial 700/HD	12	102086
Industrial 600/DQ	12	102088
Compact 400/LQ	12	102087
Compact 400/DQ	12	102088
HD 12GB /R	13	102090
HD 10GB /I	13	102071
HD 12GB @7200 /SE	13	102057
HD 18.2GB @10000 /E	13	102078
HD 18.2GB@10000 /I	13	102050
HD 18GB /SE	13	102083
HD 6GB /I	13	102072
HD 8.2GB @5400	13	102093

You have the requirement to display PRODUCT_NAME and LIST_PRICE from the table where the CATEGORY_ID column has values 12 or 13, and the SUPPLIER_ID column has the value 102088. You executed the following SQL statement:

```
SELECT product_name, list_price FROM product_information
```

WHERE (category_id = 12 AND category_id = 13) AND supplier_id = 102088; Which statement is true regarding the execution of the query?

- A. It would not execute because the entire WHERE clause is not enclosed within parentheses.
- B. It would execute but would return no rows.
- C. It would not execute because the same column has been used twice with the AND logical operator.
- D. It would execute and return the desired.

Answer: B

NEW QUESTION 7

Evaluate the following ALTER TABLE statement:

```
ALTER TABLE orders
```

```
SET UNUSED (order_date); Which statement is true?
```

- A. After executing the ALTER TABLE command, you can add a new column called ORDER_DATE to the ORDERS table.
- B. The ORDER_DATE column should be empty for the ALTER TABLE command to execute successfully.
- C. ROLLBACK can be used to get back the ORDER_DATE column in the ORDERS table.
- D. The DESCRIBE command would still display the ORDER_DATE column.

Answer: A

NEW QUESTION 8

Which task can be performed by using a single Data Manipulation Language (DML) statement?

- A. Removing all data only from a single column on which a primary key constraint is defined.
- B. Removing all data from a single column on which a unique constraint is defined.
- C. Adding a column with a default value while inserting a row into a table.
- D. Adding a column constraint while inserting a row into a table.

Answer: A

NEW QUESTION 9

Which two statements are true regarding constraints?

- A. A foreign key column cannot contain null values.
- B. A column with the UNIQUE constraint can contain null values.
- C. A constraint is enforced only for INSERT operation on the table.
- D. A constraint can be disabled even if the constraint column contains data.
- E. All constraints can be defined at the column level and at the table level.

Answer: BD

NEW QUESTION 10

View the Exhibit and examine the structure of the CUSTOMERS and CUST_HISTORY tables.

CUSTOMERS		
Name	Null?	Type
-----	-----	-----
CUST_ID	NOT NULL	NUMBER (4)
CUST_NAME		VARCHAR2 (20)
CUST_ADDRESS		VARCHAR2 (30)
CUST_CITY		VARCHAR2 (20)

CUST_HISTORY		
Name	Null?	Type
-----	-----	-----
CUST_ID	NOT NULL	NUMBER (4)
CUST_NAME		VARCHAR2 (20)
CUST_CITY		VARCHAR2 (20)
CHANGE_DATE		DATE

The CUSTOMERS table contains the current location of all currently active customers.

The CUST_HISTORY table stores historical details relating to any changes in the location of all current as well as previous customers who are no longer active with the company.

You need to find those customers who have never changed their address. Which SET operator would you use to get the required output?

- A. INTERSECT
- B. UNION ALL
- C. MINUS
- D. UNION

Answer: C

NEW QUESTION 10

The BOOKS_TRANSACTIONS table exists in your schema in this database.

You execute this SQL statement when connected to your schema in your database instance. SQL> SELECT * FROM books_transactions ORDER BY 3; What is the result?

- A. The execution fails unless the numeral 3 in the ORDER BY clause is replaced by a column name.
- B. All table rows are displayed sorted in ascending order of the values in the third column.
- C. The first three rows in the table are displayed in the order that they are stored.
- D. Only the three rows with the lowest values in the key column are displayed in the order that they are stored.

Answer: B

NEW QUESTION 11

You must create a SALES table with these column specifications and data types: (Choose the best answer.) SALESID: Number

STOREID: Number ITEMID: Number

QTY: Number, should be set to 1 when no value is specified

SLSDATE: Date, should be set to current date when no value is specified

PAYMENT: Characters up to 30 characters, should be set to CASH when no value is specified Which statement would create the table?

- A. CREATE TABLE Sales(SALESID NUMBER (4),STOREID NUMBER (4),ITEMID NUMBER (4),QTY NUMBER DEFAULT = 1,SLSDATE DATE DEFAULT SYSDATE,PAYMENT VARCHAR2(30) DEFAULT = "CASH");
- B. CREATE TABLE Sales(SALESID NUMBER (4),STOREID NUMBER (4),ITEMID NUMBER (4),QTY NUMBER DEFAULT = 1,SLSDATE DATE DEFAULT 'SYSDATE',PAYMENT VARCHAR2(30) DEFAULT CASH);
- C. CREATE TABLE Sales(SALESID NUMBER (4),STOREID NUMBER (4),ITEMID NUMBER (4),qty NUMBER DEFAULT = 1,SLSDATE DATE DEFAULT SYSDATE,PAYMENT VARCHAR2(30) DEFAULT = "CASH");
- D. Create Table sales(salesid NUMBER (4),Storeid NUMBER (4),Itemid NUMBER (4),QTY NUMBER DEFAULT 1,Slstartdate DATE DEFAULT SYSDATE,payment VARCHAR2(30) DEFAULT 'CASH');

Answer: D

NEW QUESTION 14

Which statement is true regarding the UNION operator?

- A. By default, the output is not sorted.
- B. Null values are not ignored during duplicate checking.
- C. Names of all columns must be identical across all select statements.
- D. The number of columns selected in all select statements need not be the same.

Answer: B

NEW QUESTION 19

View the exhibit and examine the structure of the PROMOTIONS table.

Table PROMOTIONS		
Name	Null?	Type
PROMO_ID	NOT NULL	NUMBER(8)
PROMO_NAME	NOT NULL	VARCHAR2(30)
PROMO_SUBCATEGORY	NOT NULL	VARCHAR2(30)
PROMO_SUBCATEGORY_ID	NOT NULL	NUMBER
PROMO_CATEGORY	NOT NULL	VARCHAR2(30)
PROMO_CATEGORY_ID	NOT NULL	NUMBER
PROMO_COST	NOT NULL	NUMBER(10,2)
PROMO_BEGIN_DATE	NOT NULL	DATE
PROMO_END_DATE	NOT NULL	DATE

You have to generate a report that displays the promo name and start date for all promos that started after the last promo in the 'INTERNET' category. Which query would give you the required output?

- A. SELECT promo_name, promo_begin_date FROM promotions WHERE promo_begin_date > ALL (SELECT MAX (promo_begin_date) FROM promotions) AND promo_category = 'INTERNET';
- B. SELECT promo_name, promo_begin_date FROM promotions WHERE promo_begin_date IN (SELECT promo_begin_date FROM promotions WHERE promo_category = 'INTERNET');
- C. SELECT promo_name, promo_begin_date FROM promotions WHERE promo_begin_date > ALL (SELECT promo_begin_date FROM promotions WHERE promo_category = 'INTERNET');
- D. SELECT promo_name, promo_begin_date FROM promotions WHERE promo_begin_date > ANY (SELECT promo_begin_date FROM promotions WHERE promo_category = 'INTERNET');

Answer: C

NEW QUESTION 20

View the exhibit for the structure of the STUDENT and FACULTY tables. STUDENT

Name Null? Type

----- STUDENT_ID NOT NULL NUMBER(2) STUDENT_NAME VARCHAR2(20) FACULTY_ID VARCHAR2(2) LOCATION_ID NUMBER(2) FACULTY

Name Null? Type

----- FACULTY_ID NOT NULL NUMBER(2) FACULTY_NAME VARCHAR2(20) LOCATION_ID NUMBER(2)

You need to display the faculty name followed by the number of students handled by the faculty at the base location.

Examine the following two SQL statements: Statement 1

SQL> SELECT faculty_name, COUNT(student_id) FROM student JOIN faculty

USING (faculty_id, location_id) GROUP BY faculty_name; Statement 2

SQL> SELECT faculty_name, COUNT(student_id)

FROM student NATURAL JOIN faculty GROUP BY faculty_name;

Which statement is true regarding the outcome?

- A. Only statement 2 executes successfully and gives the required result.
- B. Only statement 1 executes successfully and gives the required result.
- C. Both statements 1 and 2 execute successfully and give different results.
- D. Both statements 1 and 2 execute successfully and give the same required result.

Answer: B

NEW QUESTION 23

You issued the following command: SQL> DROP TABLE employees; Which three statements are true?

- A. All uncommitted transactions are committed.
- B. All indexes and constraints defined on the table being dropped are also dropped.
- C. Sequences used in the employees table become invalid.
- D. The space used by the employees table is reclaimed immediately.
- E. The employees table can be recovered using the rollback command.
- F. The employees table is moved to the recycle bin

Answer: ABF

NEW QUESTION 28

Examine the create table statements for the stores and sales tables.

SQL> CREATE TABLE stores(store_id NUMBER(4) CONSTRAINT store_id_pk PRIMARY KEY, store_name VARCHAR2(12), store_address VARCHAR2(20), start_date DATE);
 SQL> CREATE TABLE sales(sales_id NUMBER(4) CONSTRAINT sales_id_pk PRIMARY KEY, item_id NUMBER(4), quantity NUMBER(10), sales_date DATE, store_id NUMBER(4), CONSTRAINT store_id_fk FOREIGN KEY(store_id) REFERENCES stores(store_id));
 You executed the following statement: SQL> DELETE from stores
 WHERE store_id=900;
 The statement fails due to the integrity constraint error:
 ORA-02292: integrity constraint (HR.STORE_ID_FK) violated
 Which three options ensure that the statement will execute successfully?

- A. Disable the primary key in the STORES table.
- B. Use CASCADE keyword with DELETE statement.
- C. DELETE the rows with STORE_ID = 900 from the SALES table and then delete rows from STORES table.
- D. Disable the FOREIGN KEY in SALES table and then delete the rows.
- E. Create the foreign key in the SALES table on SALES_ID column with on DELETE CASCADE option.

Answer: CDE

NEW QUESTION 30


Which three arithmetic operations can be performed on a column by using a SQL function that is built into Oracle database? (Choose three.)

- A. Finding the lowest value
- B. Finding the quotient
- C. Raising to a power
- D. Subtraction
- E. Addition

Answer: ACE

NEW QUESTION 32

View the Exhibit and examine the structure in the DEPARTMENTS tables. (Choose two.)

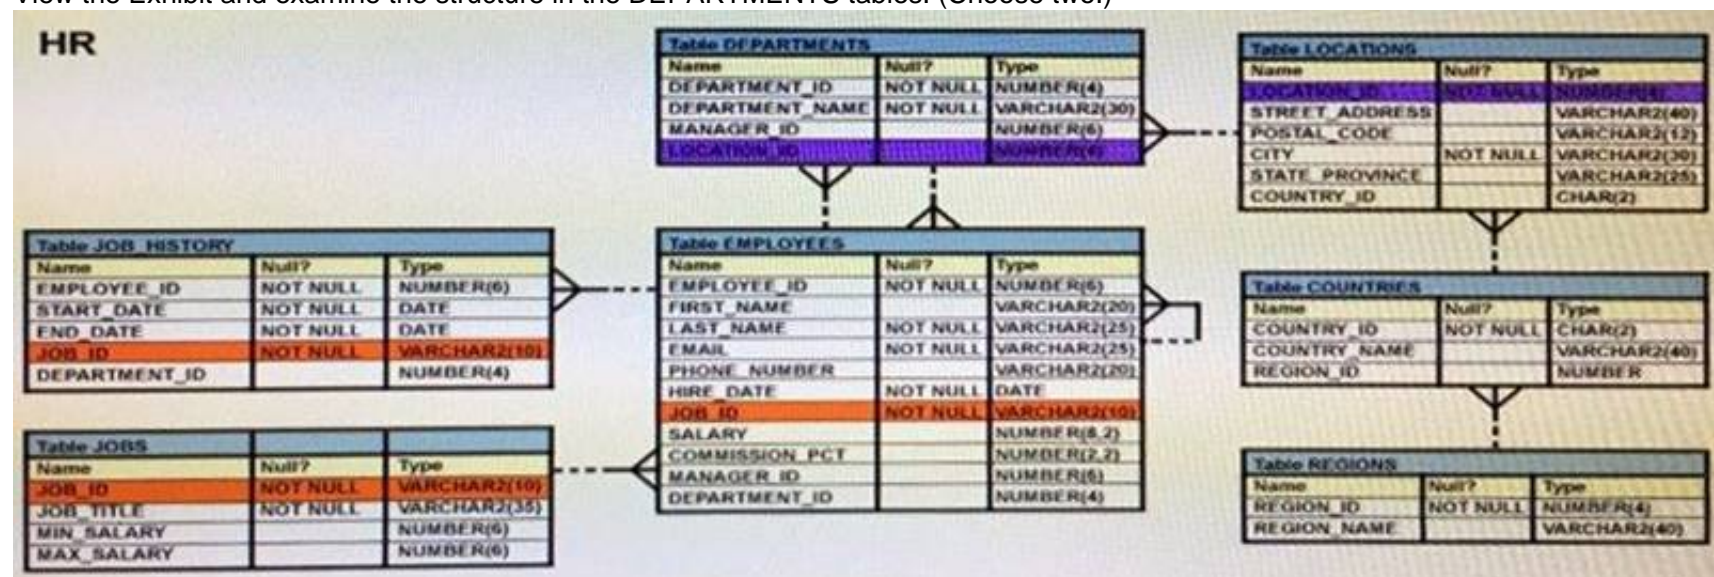

Examine this SQL statement:
 SELECT department_id "DEPT_ID", department_name, 'b' FROM departments
 WHERE departments_id=90 UNION
 SELECT department_id, department_name DEPT_NAME, 'a' FROM departments
 WHERE department_id=10
 Which two ORDER BY clauses can be used to sort output?

- A. ORDER BY DEPT_NAME;
- B. ORDER BY DEPT_ID;
- C. ORDER BY 'b';
- D. ORDER BY 3;

Answer: BD

NEW QUESTION 37

A subquery is called a single-row subquery when .

- A. There is only one subquery in the outer query and the inner query returns one or more values
- B. The inner query returns a single value to the outer query.
- C. The inner query uses an aggregating function and returns one or more values.
- D. The inner query returns one or more values and the outer query returns a single value.

Answer: B

NEW QUESTION 42

On your Oracle 12c database, you invoked SQL *Loader to load data into the EMPLOYEES table in the HR schema by issuing the following command:
 \$> sqlldr hr/hr@pdb table=employees
 Which two statements are true regarding the command?

- A. It succeeds with default settings if the EMPLOYEES table belonging to HR is already defined in the database.
- B. It fails because no SQL *Loader data file location is specified.

- C. It fails if the HR user does not have the CREATE ANY DIRECTORY privilege.
- D. It fails because no SQL *Loader control file location is specified.

Answer: AC

NEW QUESTION 45

Examine the structure of the EMPLOYEES table. NameNull?Type

 EMPLOYEE_IDNOT NULLNUMBER(6) FIRST_NAMEVARCHAR2(20) LAST_NAMENOT NULLVARCHAR2(25) EMAILNOT NULLVARCHAR2(25) PHONE NUMBERVARCHAR2(20) HIRE_DATENOT NULLDATE JOB_IDNOT NULLVARCHAR2(10) SALARYNUMBER(8,2) COMMISSION_PCTNUMBER(2,2) MANAGER_IDNUMBER(6) DEPARTMENT_IDNUMBER(4)
 There is a parent/child relationship between EMPLOYEE_ID and MANAGER_ID.
 You want to display the last names and manager IDs of employees who work for the same manager as the employee whose EMPLOYEE_ID is 123.
 Which query provides the correct output?

- A. SELECT e.last_name, m.manager_idFROM employees e RIGHT OUTER JOIN employees mon (e.manager_id = m.employee_id)AND e.employee_id = 123;
- B. SELECT e.last_name, m.manager_idFROM employees e RIGHT OUTER JOIN employees mon (e.employee_id = m.manager_id)WHERE e.employee_id = 123;
- C. SELECT e.last_name, e.manager_idFROM employees e RIGHT OUTER JOIN employees mon (e.employee_id = m.employee_id)WHERE e.employee_id = 123;
- D. SELECT m.last_name, e.manager_idFROM employees e LEFT OUTER JOIN employees mon (e.manager_id = m.manager_id)WHERE e.employee_id = 123;

Answer: B

NEW QUESTION 48

Which two statements are true regarding the EXISTS operator used in the correlated subqueries? (Choose two.)

- A. The outer query stops evaluating the result set of the inner query when the first value is found.
- B. It is used to test whether the values retrieved by the inner query exist in the result of the outer query.
- C. It is used to test whether the values retrieved by the outer query exist in the result set of the inner query.
- D. The outer query continues evaluating the result set of the inner query until all the values in the result set are processed.

Answer: AC

Explanation:

References:
<http://www.techonthenet.com/oracle/exists.php>

NEW QUESTION 52

Which three statements are true regarding the data types?

- A. The minimum column width that can be specified for a VARCHAR2 data type column is one.
- B. Only one LONG column can be used per table.
- C. A TIMESTAMP data type column stores only time values with fractional seconds.
- D. The BLOB data type column is used to store binary data in an operating system file.
- E. The value for a CHAR data type column is blank-padded to the maximum defined column width.

Answer: ABE

NEW QUESTION 53

View the Exhibit and examine the structure of the PROMOTION table.

Table PROMOTIONS		
Name	Null?	Type
PROMO_ID	NOT NULL	NUMBER(6)
PROMO_NAME	NOT NULL	VARCHAR2(30)
PROMO_SUBCATEGORY	NOT NULL	VARCHAR2(30)
PROMO_SUBCATEGORY_ID	NOT NULL	NUMBER
PROMO_CATEGORY	NOT NULL	VARCHAR2(30)
PROMO_CATEGORY_ID	NOT NULL	NUMBER
PROMO_COST	NOT NULL	NUMBER(10,2)
PROMO_BEGIN_DATE	NOT NULL	DATE
PROMO_END_DATE	NOT NULL	DATE

You have to generate a report that displays the promo named start data for all promos that started after that last promo in the 'INTERNET' category.

- A. Select promo_name, promo_being_date FROM promoptions WHERE promo_being_data > ANY (SELECT promo_being-date FROM promotionsWHERE promo_category = 'INTERNET'
- B. SELECT promo_neme, promo_being_date FROM promotions WHERE promo_being_date > All (SELECT promo_beinjd-date FROM promotionsWHERE promo_category ='INTERNET');
- C. SELECT promo-name, promo-being _date FROM promotionsWhere promo_being_data >ALL (SELECT MAX (promo_being-date) FROM promotions) ANDPromo-category ='INTERNET';
- D. SELECT promo-name, promo-being_date FROM promotion WHERE promo-being-date IN (SELECT promo_bijing_date FROM promotionsWHERE

promo_category='INTYERNET');

Answer: B

NEW QUESTION 58

Examine the business rule:

Each student can work on multiple projects and each project can have multiple students.

You need to design an Entity Relationship Model (ERD) for optimal data storage and allow for generating reports in this format:

STUDENT_ID FIRST_NAME LAST_NAME PROJECT_ID PROJECT_NAME PROJECT_TASK

Which two statements are true in this scenario?

- A. The ERD must have a 1:M relationship between the STUDENTS and PROJECTS entities.
- B. The ERD must have a M:M relationship between the STUDENTS and PROJECTS entities that must be resolved into 1:M relationships.
- C. STUDENT_ID must be the primary key in the STUDENTS entity and foreign key in the PROJECTS entity.
- D. PROJECT_ID must be the primary key in the PROJECTS entity and foreign key in the STUDENTS entity.
- E. An associative table must be created with a composite key of STUDENT_ID and PROJECT_ID, which is the foreign key linked to the STUDENTS and PROJECTS entities.

Answer: BE

Explanation:

References:

<http://www.oracle.com/technetwork/issue-archive/2011/11-nov/o61sql-512018.html>

NEW QUESTION 62

Evaluate the following CRTEATE TABLE commands:

CREATE_TABLE orders

(ord_no NUMBER (2) CONSTRAINT ord_pk PRIMARY KEY,

ord_date DATE, cust_id NUMBER (4));

CREATE TABLE ord_items (ord _no NUMBER (2),

item_no NUMBER(3),

qty NUMBER (3) CHECK (qty BETWEEN 100 AND 200),

expiry_date date CHECK (expiry_date> SYSDATE), CONSTRAINT it_pk PRIMARY KEY (ord_no, item_no),

CONSTARINT ord_fk FOREIGN KEY (ord_no) REFERENCES orders (ord_no)); Why would the ORD_ITEMS table not get created?

- A. SYSDATE cannot be used with the CHECK constraint.
- B. The BETWEEN clause cannot be used for the CHECK constraint.
- C. The CHECK constraint cannot be placed on columns having the DATE data type.
- D. ORD_NO and ITEM_NO cannot be used as a composite primary key because ORD_NO is also the FOREIGN KEY.

Answer: A

NEW QUESTION 64

Examine the structure proposed for the TRANSACTIONS table:

Name	Null?	Type
TRANS_ID	NOT NULL	NUMBER (6)
CUST_NAME	NOT NULL	VARCHAR2 (20)
CUST_STATUS	NOT NULL	VARCHAR2
TRANS_DATE	NOT NULL	DATE
TRANS_VALIDITY		INTERVAL DAY TO SECOND
CUST_CREDIT_VALUE		NUMBER (10)

Which two statements are true regarding the storage of data in the above table structure? (Choose two.)

- A. The CUST_CREDIT_VALUE column would allow storage of positive and negative integers.
- B. The TRANS_VALIDITY column would allow storage of a time interval in days, hours, minutes, and seconds.
- C. The CUST_STATUS column would allow storage of data up to the maximum VARCHAR2 size of 4,000 characters.
- D. The TRANS_DATE column would allow storage of dates only in the dd-mon-yyyy format.

Answer: AB

NEW QUESTION 66

View the Exhibit and examine the data in the PRODUCTS table. (Choose the best answer.)

PRODUCTS

PROD_ID	PROD_NAME	PROD_CATEGORY	PROD_MIN_PRICE	PROD_UNIT_OF_MEASURE
101	Envoy 156MB-40GB	Hardware	6000	Nos.
102	Y Box	Electronics	9000	
103	DVD-R Disc, 4.7 GB	Software/Other	2000	Nos.
104	Documentation	Software/Other	4000	

You must display product names from the PRODUCTS table that belong to the 'Software/other' category with minimum prices as either \$2000 or \$4000 and with no unit of measure.

You issue this query:

SQL > SELECT prod_name, prod_category, prod_min_price FROM products

Where prod_category LIKE '%Other%' AND (prod_min_price = 2000 OR prod_min_price = 4000) AND prod_unit_of_measure <> ' ';

Which statement is true?

- A. It executes successfully but returns no result.
- B. It executes successfully and returns the required result.
- C. It generates an error because the condition specified for PROD_UNIT_OF_MEASURE is not valid.
- D. It generates an error because the condition specified for the PROD_CATEGORY column is not valid.

Answer: A

NEW QUESTION 70


Which three statements are true regarding the SQL WHERE and HAVING clauses?

- A. The HAVING clause conditions can have aggregating functions.
- B. The HAVING clause conditions can use aliases for the columns.
- C. The WHERE and HAVING clauses cannot be used together in a SQL statement.
- D. The WHERE clause is used to exclude rows before grouping data.
- E. The HAVING clause is used to exclude one or more aggregated results after grouping data.

Answer: ADE

NEW QUESTION 71

View the exhibit and examine the structure of the EMPLOYEES table.

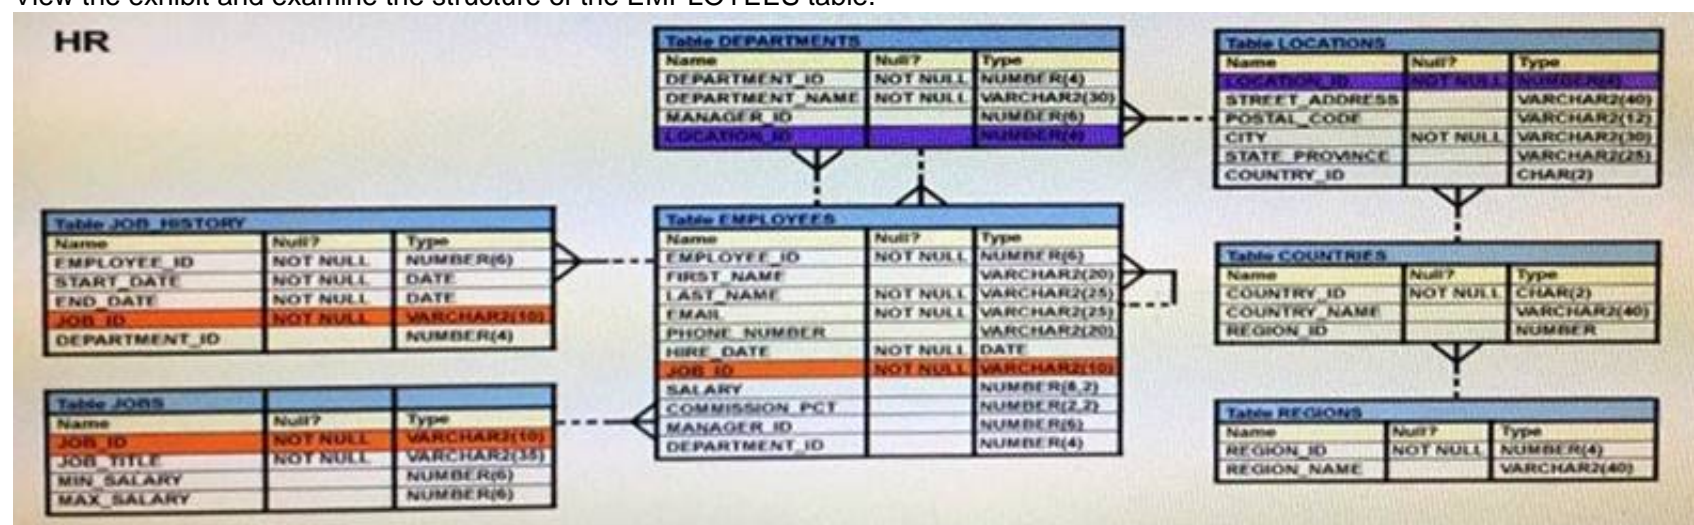

You want to display all employees and their managers having 100 as the MANAGER_ID. You want the output in two columns: the first column would have the LAST_NAME of the managers and the second column would have LAST_NAME of the employees.

Which SQL statement would you execute?

- A. SELECT m.last_name "Manager", e.last_name "Employee" FROM employees m JOIN employees e ON m.employee_id = e.manager_id WHERE m.manager_id = 100;
- B. SELECT m.last_name "Manager", e.last_name "Employee" FROM employees m JOIN employees e ON m.employee_id = e.manager_id WHERE e.manager_id = 100;
- C. SELECT m.last_name "Manager", e.last_name "Employee" FROM employees m JOIN employees e ON e.employee_id = m.manager_id WHERE m.manager_id = 100;
- D. SELECT m.last_name "Manager", e.last_name "Employee" FROM employees m JOIN employees e WHERE m.employee_id = e.manager_id and AND e.manager_id = 100

Answer: B

NEW QUESTION 73

Which two statements are true regarding the SQL GROUP BY clause?

- A. You can use a column alias in the GROUP BY clause.
- B. Using the WHERE clause after the GROUP BY clause excludes rows after creating groups.
- C. The GROUP BY clause is mandatory if you are using an aggregating function in the SELECT clause.
- D. Using the WHERE clause before the GROUP BY clause excludes rows before creating groups.

E. If the SELECT clause has an aggregating function, then columns without an aggregating function in the SELECT clause should be included in the GROUP BY clause.

Answer: DE

NEW QUESTION 76

Which statements are true? (Choose all that apply.)

- A. The data dictionary is created and maintained by the database administrator.
- B. The data dictionary views consists of joins of dictionary base tables and user-defined tables.
- C. The usernames of all the users including the database administrators are stored in the data dictionary.
- D. The USER_CONS_COLUMNS view should be queried to find the names of the columns to which a constraint applies.
- E. Both USER_OBJECTS and CAT views provide the same information about all the objects that are owned by the user.
- F. Views with the same name but different prefixes, such as DBA, ALL and USER, use the same base tables from the data dictionary.

Answer: CDF


Explanation:

References:

https://docs.oracle.com/cd/B10501_01/server.920/a96524/c05dicti.htm

NEW QUESTION 81

View the Exhibit and examine the details of the PRODUCT_INFORMATION table. (Choose two.)

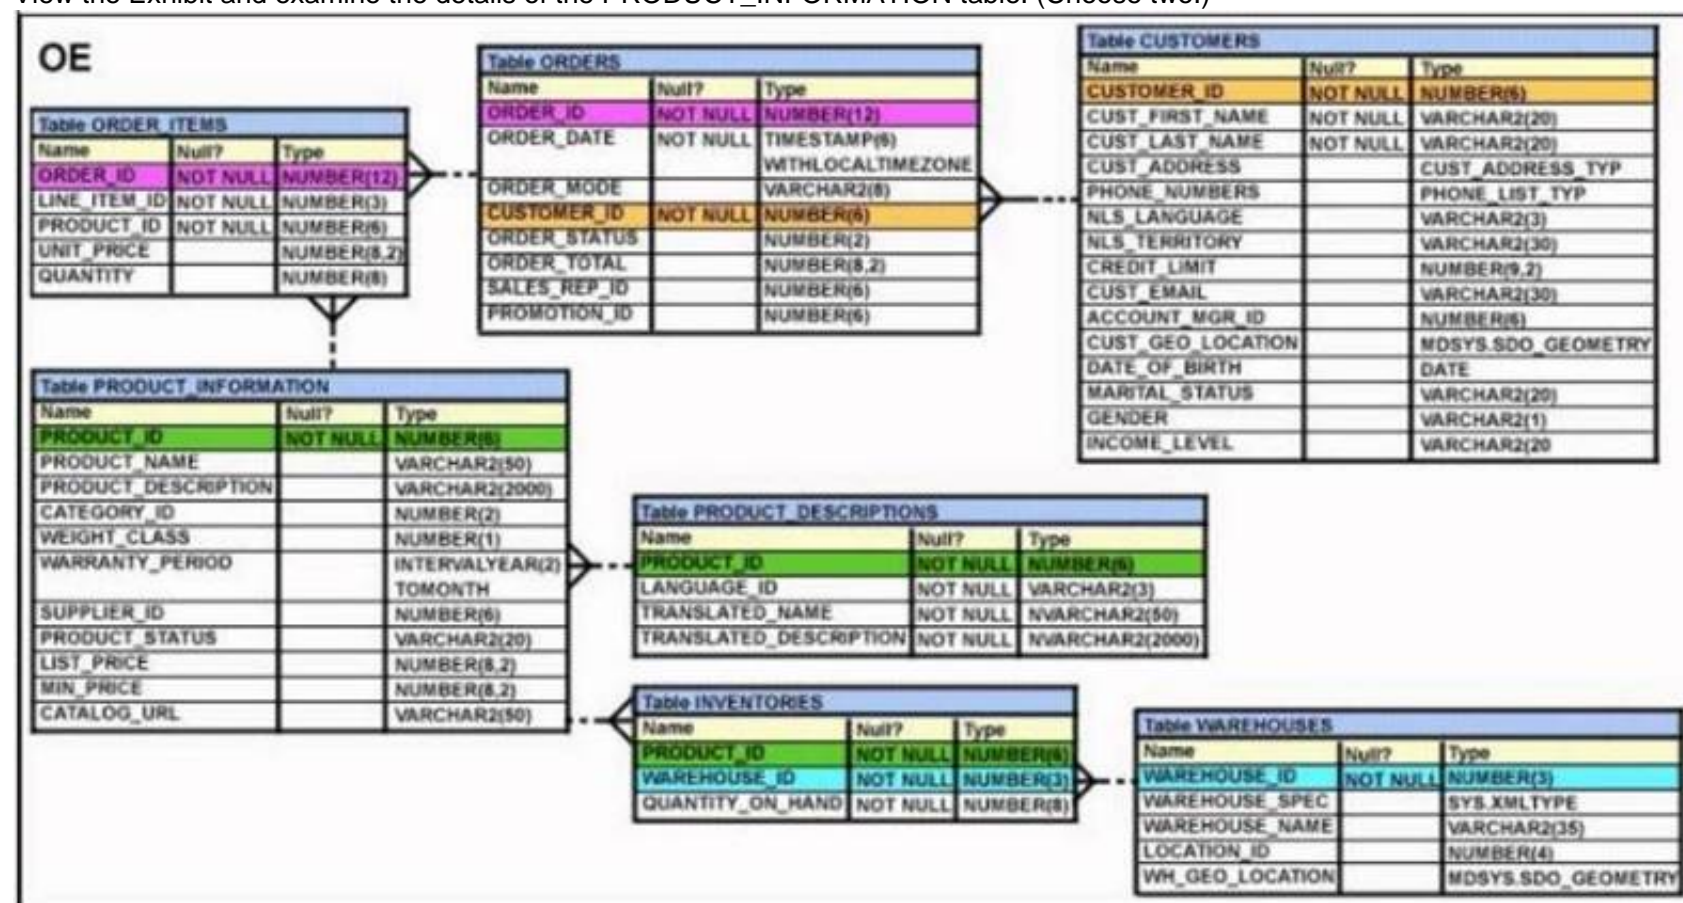

Evaluate this SQL statement:

```
SELECT TO_CHAR(list_price, '$9,999') FROM product_information;
```

Which two statements are true regarding the output?

- A. A row whose LIST_PRICE column contains value 11235.90 would be displayed as #####.
- B. A row whose LIST_PRICE column contains value 1123.90 would be displayed as \$1,123.
- C. A row whose LIST_PRICE column contains value 1123.90 would be displayed as \$1,124.
- D. A row whose LIST_PRICE column contains value 11235.90 would be displayed as \$1,123.

Answer: AC

NEW QUESTION 82

Which task can be performed by using a single Data Manipulation Language (DML) statement?

- A. adding a column constraint when inserting a row into a table
- B. adding a column with a default value when inserting a row into a table
- C. removing all data only from one single column on which a unique constraint is defined
- D. removing all data only from one single column on which a primary key constraint is defined

Answer: C

NEW QUESTION 87

Which statement is true regarding the default behavior of the ORDER BY clause?

- A. In a character sort, the values are case-sensitive.
- B. NULL values are not considered at all by the sort operation.
- C. Only those columns that are specified in the SELECT list can be used in the ORDER BY clause.
- D. Numeric values are displayed from the maximum to the minimum value if they have decimal positions.

Answer: A

NEW QUESTION 88

Which three statements are true regarding group functions? (Choose three.)

- A. They can be used on columns or expressions.
- B. They can be passed as an argument to another group function.
- C. They can be used only with a SQL statement that has the GROUP BY clause.
- D. They can be used on only one column in the SELECT clause of a SQL statement.
- E. They can be used along with the single-row function in the SELECT clause of a SQL statement.

Answer: ABE

Explanation:

References:
<https://www.safaribooksonline.com/library/view/mastering-oracle-sql/0596006322/ch04.html>

NEW QUESTION 91

Which statements are correct regarding indexes? (Choose all that apply.)

- A. A non-deferrable PRIMARY KEY or UNIQUE KEY constraint in a table automatically attempts to create a unique index.
- B. Indexes should be created on columns that are frequently referenced as part of any expression.
- C. When a table is dropped, the corresponding indexes are automatically dropped.
- D. For each DML operation performed, the corresponding indexes are automatically updated.

Answer: ACD

Explanation:

References:
<http://viralpatel.net/blogs/understanding-primary-keypk-constraint-in-oracle/>

NEW QUESTION 94

View the Exhibit and examine PRODUCTS and ORDER_ITEMS tables.

PRODUCTS	
PRODUCT ID	PRODUCT NAME
1	Inkjet C/8/HQ
2	CPU D300
3	HD 8GB /I
4	HD 12GB /R

ORDER_ITEMS			
ORDER ID	PRODUCT ID	QTY	UNIT PRICE
11	1	10	100
22	2	15	120
33	3	10	50
44	1	5	10
66	2	20	125

You executed the following query to display PRODUCT_NAME and the number of times the product has been ordered:

```
SQL>SELECT p.product_name, i.item_cnt
FROM (SELECT product_id, COUNT (*) item_cnt FROM order_items
GROUP BY product_id) i RIGHT OUTER JOIN products p ON i.product_id = p.product_id;
```

What would happen when the above statement is executed?

- A. The statement would execute successfully to produce the required output.
- B. The statement would not execute because inline views and outer joins cannot be used together.
- C. The statement would not execute because the ITEM_CNT alias cannot be displayed in the outer query.
- D. The statement would not execute because the GROUP BY clause cannot be used in the inline.

Answer: A

NEW QUESTION 99

Examine the types and examples of relationship that follows: (Choose the best answer.)

- 1 One-to-one a) teacher to Student
- 2 One-to-many b) Employees to Manager

3 Many-to-one c) Person to SSN
4 Many-to-many d) Customers to Products
Which option indicates correctly matched relationships?

- A. 1-d, 2-b, 3-a, and 4-c
- B. 1-c, 2-d, 3-a, and 4-b
- C. 1-a, 2-b, 3-c, and 4-d
- D. 1-c, 2-a, 3-b, and 4-d

Answer: C

NEW QUESTION 100

Which two statements best describe the benefits of using the WITH clause? (Choose two.)

- A. It can improve the performance of a large query by storing the result of a query block having the WITH clause in the session's temporary tablespace.
- B. It enables sessions to reuse the same query block in a SELECT statement, if it occurs more than once in a complex query.
- C. It enables sessions to store a query block permanently in memory and use it to create complex queries.
- D. It enables sessions to store the results of a query permanently.

Answer: AB

NEW QUESTION 101

Which two are the minimal requirements for a self-join? (Choose two.)

- A. Only equijoin conditions may be used in the query.
- B. Outer joins must not be used in the query.
- C. There must be a condition on which the self-join is performed.
- D. No other condition except the self-join may be specified.
- E. The table used for the self-join must have two different alias names in the query.

Answer: CE

NEW QUESTION 106

Evaluate the following SELECT statement and view the exhibit to examine its output:

```
SELECT constraint_name, constraint_type, search_condition, r_constraint_name, delete_rule, status, FROM user_constraints
WHERE table_name = 'ORDERS'; CONSTRAINT_NAME
CON SEARCH_CONDITION R_CONSTRAINT_NAME DELETE_RULE
STATUS ORDER_DATE_NN C
"ORDER_DATE" IS NOT NULL ENABLED ORDER_CUSTOMER_ID_NN C
"CUSTOMER_ID" IS NOT NULL ENABLED ORDER_MODE_LOV C
order _mode in ('direct', 'online') ENABLED
ORDER TOTAL MIN C
order total >= 0 ENABLED ORDER PK
P ENABLED
ORDERS CUSTOMER ID R
CUSTOMERS ID SET NULL ENABLED
ORDERS SALES REP R
EMP EMP ID SET NULL ENABLED
```

Which two statements are true about the output? (Choose two.)

- A. The R_CONSTRAINT_NAME column gives the alternative name for the constraint.
- B. In the second column, 'c' indicates a check constraint.
- C. The STATUS column indicates whether the table is currently in use.
- D. The column DELETE_RULE decides the state of the related rows in the child table when the corresponding row is deleted from the parent table.

Answer: BD

NEW QUESTION 108

View the exhibit and examine the structure of the STORES table. STORES table

NameNull?Type

----- STORE_IDNUMBER NAMEVARCHAR2(100)

ADDRESSVARCHAR2(200) CITYVARCHAR2(100) COUNTRYVARCHAR2(100) START_DATE DATE END_DATE DATE PROPERTY_PRICE NUMBER

You want to display the NAME of the store along with the ADDRESS, START_DATE, PROPERTY_PRICE, and the projected property price, which is 115% of property price.

The stores displayed must have START_DATE in the range of 36 months starting from 01-Jan-2000 and above.

Which SQL statement would get the desired output?

- A. SELECT name, concat (address|| ',' || city|| ', ', country) AS full_address,start_date,property_price, property_price*115/100FROM storesWHERE MONTHS_BETWEEN (start_date, '01-JAN-2000')<=36;
- B. SELECT name, concat (address|| ',' || city|| ', ', country) AS full_address,start_date,property_price, property_price*115/100FROM storesWHERE TO_NUMBER(start_date-TO_DATE('01-JAN-2000','DD-MON-RRRR')) <=36;
- C. SELECT name, address|| ',' ||city|| ',' ||country AS full_address,start_date,property_price, property_price*115/100FROM storesWHERE MONTHS_BETWEEN (start_date, TO_DATE('01-JAN-2000','DD-MON-RRRR')) <=36;
- D. SELECT name, concat (address|| ',' || city|| ', ', country) AS full_address,start_date,property_price, property_price*115/100FROM storesWHERE MONTHS_BETWEEN (start_date, TO_DATE('01-JAN-2000','DD-MON-RRRR')) <=36;

Answer: D

NEW QUESTION 111

You need to produce a report where each customer's credit limit has been incremented by \$1000. In the output, the customer's last name should have the heading Name and the incremented credit limit should be labeled New Credit Limit. The column headings should have only the first letter of each word in uppercase.

Which statement would accomplish this requirement?

- A. SELECT cust_last_name AS "Name", cust_credit_limit + 1000AS "New Credit Limit"FROM customers;
- B. SELECT cust_last_name AS Name, cust_credit_limit + 1000AS New Credit LimitFROM customers;
- C. SELECT cust_last_name AS Name, cust_credit_limit + 1000"New Credit Limit"FROM customers;
- D. SELECT INITCAP (cust_last_name) "Name", cust_credit_limit + 1000INITCAP ("NEW CREDIT LIMIT")FROM customers;

Answer: A

NEW QUESTION 112

Which three statements are true regarding the usage of the WITH clause in complex correlated subqueries: (Choose three.)

- A. It can be used only with the SELECT clause.
- B. The WITH clause can hold more than one query.
- C. If the query block name and the table name are the same, then the table name takes precedence.
- D. The query name in the WITH clause is visible to other query blocks in the WITH clause as well as to the main query block

Answer: ABD

NEW QUESTION 115

Which two statements are true regarding constraints? (Choose two.)

- A. A constraint is enforced only for an INSERT operation on a table.
- B. A foreign key cannot contain NULL values.
- C. The column with a UNIQUE constraint can store NULLS.
- D. You can have more than one column in a table as part of a primary key.

Answer: CD

NEW QUESTION 120

A non-correlated subquery can be defined as . (Choose the best answer.)

- A. A set of one or more sequential queries in which generally the result of the inner query is used as the search value in the outer query.
- B. A set of sequential queries, all of which must return values from the same table.
- C. A set of sequential queries, all of which must always return a single value.
- D. A SELECT statement that can be embedded in a clause of another SELECT statement only.

Answer: A

NEW QUESTION 122

Examine the structure of the ORDERS table: (Choose the best answer.)

NAME	NULL	TYPE
ORDER_ID	NOT NULL	NUMBER (12)
ORDER_DATE	NOT NULL	TIMESTAMP(6)
CUSTOMERS_ID	NOT NULL	NUMBER(6)
ORDER_STATUS		NUMBER(2)
ORDER_TOTAL		NUMBER(8, 2)

You want to find the total value of all the orders for each year and issue this command:

```
SQL> SELECT TO_CHAR(order_date,'rr'), SUM(order_total) FROM orders GROUP BY TO_CHAR(order_date, 'yyyy');
```

Which statement is true regarding the result?

- A. It executes successfully but does not give the correct output.
- B. It executes successfully but gives the correct output.
- C. It returns an error because the TO_CHAR function is not valid.
- D. It return an error because the datatype conversion in the SELECT list does not match the data type conversion in the GROUP BY clause.

Answer: D

NEW QUESTION 126

Which statement is true about SQL query processing in an Oracle database instance? (Choose the best answer.)

- A. During parsing, a SQL statement containing literals in the WHERE clause that has been executed by any session and which is cached in memory, is always reused for the current execution.
- B. During executing, the oracle server may read data from storage if the required data is not already in memory.
- C. During row source generation, rows that satisfy the query are retrieved from the database and stored in memory.
- D. During optimization, execution plans are formulated based on the statistics gathered by the database instance, and the lowest cost plan is selected for execution.

Answer: B

NEW QUESTION 129

Examine the command:

```
SQL> ALTER TABLE books_transactions
```

```
ADD CONSTRAINT fk_book_id FOREIGN KEY (book_id) REFERENCES books (book_id) ON DELETE CASCADE; What does ON DELETE CASCADE imply?
```

- A. When the BOOKS table is dropped, the BOOK_TRANSACTIONS table is dropped.
- B. When the BOOKS table is dropped, all the rows in the BOOK_TRANSACTIONS table are deleted but the table structure is retained.
- C. When a row in the BOOKS table is deleted, the rows in the BOOK_TRANSACTIONS table whose BOOK_ID matches that of the deleted row in the BOOKS table are also deleted.
- D. When a value in the BOOKS.BOOK_ID column is deleted, the corresponding value is updated in the BOOKS_TRANSACTIONS.BOOK_ID column.

Answer: C

NEW QUESTION 131

Evaluate the following query:

```
SQL> SELECT TRUNC (ROUND (156.00, -1), -1) FROM DUAL;
```

What would be the outcome?

- A. 150
- B. 200
- C. 160
- D. 16
- E. 100

Answer: C

Explanation:

References:

https://docs.oracle.com/cd/B19306_01/server.102/b14200/functions135.htm https://docs.oracle.com/cd/B28359_01/olap.111/b28126/dml_functions_2127.htm

NEW QUESTION 136

The user SCOTT who is the owner of ORDERS and ORDER_ITEMS tables issues the following GRANT command:

```
GRANT ALL
```

```
ON orders, order_items TO PUBLIC;
```

What correction needs to be done to the above statement?

- A. PUBLIC should be replaced with specific usernames.
- B. ALL should be replaced with a list of specific privileges.
- C. WITH GRANT OPTION should be added to the statement.
- D. Separate GRANT statements are required for ORDERS and ORDER_ITEMS tables.

Answer: D

Explanation:

References:

<http://docs.oracle.com/javadb/10.8.3.0/ref/rrefsqljgrant.html>

NEW QUESTION 139

Examine the structure of the EMPLOYEES table. (Choose the best answer.)

Name	Null?	Type
-----	-----	-----
EMPLOYEE_ID	NOT NULL	NUMBER (6)
FIRST_NAME		VARCHAR2 (20)
LAST_NAME	NOT NULL	VARCHAR2 (25)
EMAIL	NOT NULL	VARCHAR2 (25)
PHONE_NUMBER		VARCHAR2 (20)
HIRE_DATE	NOT NULL	DATE
JOB_ID	NOT NULL	VARCHAR2 (10)
SALARY		NUMBER (8, 2)
COMMISSION_PCT		NUMBER (2, 2)
MANAGER_ID		NUMBER (6)
DEPARTMENT_ID		NUMBER (4)

You must display the details of employees who have manager with MANAGER_ID 100, who were hired in the past 6 months and who have salaries greater than 10000.

- A.

```
SELECT last_name, hire_date, salaryFROM employeesWHERE salary > 10000UNION ALL SELECT last_name, hire_date, salaryFROM employeesWHERE manager_id = (SELECT employee_id FROM employees WHERE employee_id = 100)INETRSECTSELECT last_name, hire_date, salaryFROM employeesWHERE hire_date > SYSDATE- 180;
```
- B.

```
SELECT last_name, hire_date, salaryFROM employeesWHERE manager_id = (SELECT employee_id FROM employees WHERE employee_id = 100)UNION ALL(SELECT last_name, hire_date, salaryFROM employeesWHERE hire_date > SYSDATE -180INTERSECTSELECT last_name, hire_date, salaryFROM employeesWHERE salary > 10000);
```
- C.

```
SELECT last_name, hire_date, salaryFROM employeesWHERE manager_id = (SELECT employee_id FROM employees WHERE employee_id = '100')UNIONSELECT last_name, hire_date, salaryFROM employeesWHERE hire_date > SYSDATE -180INTERSECTSELECT last_name, hire_date, salaryFROM
```


employeesWHERE salary > 10000;
D. (SELECT last_name, hire_date, salaryFROM employeesWHERE salary > 10000UNION ALLSELECT last_name, hire_date, salaryFROM employeesWHERE manager_ID = (SELECT employee_id FROM employees WHERE employee_id = 100))UNIONSELECT last_name, hire_date, salaryFROM employeesWHERE hire_date > SYSDATE -180;

Answer: C

NEW QUESTION 143

Which three statements are true regarding single-row functions? (Choose three.)

- A. The data type returned, can be different from the data type of the argument that is referenced.
- B. They can return multiple values of more than one data type.
- C. They can accept only one argument.
- D. They can be nested up to only two levels.
- E. They can be used in SELECT, WHERE, and ORDER BY clauses.
- F. They can accept column names, expressions, variable names, or a user-supplied constants as arguments.

Answer: AEF

NEW QUESTION 146

Which three statements are true regarding subqueries? (Choose three.)

- A. The ORDER BY Clause can be used in a subquery.
- B. A subquery can be used in the FROM clause of a SELECT statement.
- C. If a subquery returns NULL, the main query may still return rows.
- D. A subquery can be placed in a WHERE clause, a GROUP BY clause, or a HAVING clause.
- E. Logical operators, such as AND, OR and NOT, cannot be used in the WHERE clause of a subquery.

Answer: ABC

NEW QUESTION 149

View the exhibit and examine the structure of ORDERS and CUSTOMERS tables. ORDERS

Name Null? Type

ORDER_ID NOT NULL NUMBER(4) ORDER_DATE NOT NULL DATE ORDER_MODE VARCHAR2(8) CUSTOMER_ID NOT NULL NUMBER(6)
ORDER_TOTAL NUMBER(8, 2) CUSTOMERS

Name Null? Type

CUSTOMER_ID NOT NULL

NUMBER(6) CUST_FIRST_NAME NOT NULL VARCHAR2(20) CUST_LAST_NAME NOT NULL VARCHAR2(20) CREDIT_LIMIT NUMBER(9,2)
CUST_ADDRESS VARCHAR2(40)

Which INSERT statement should be used to add a row into the ORDERS table for the customer whose CUST_LAST_NAME is Roberts and CREDIT_LIMIT is 600? Assume there exists only one row with CUST_LAST_NAME as Roberts and CREDIT_LIMIT as 600.

- A. INSERT INTO (SELECT o.order_id, o.order_date, o.order_mode, c.customer_id, o.order_totalFROM orders o, customers cWHERE o.customer_id = c.customer_id AND c.cust_last_name='Roberts' AND c.credit_limit=600)VALUES (1,'10-mar-2007', 'direct', (SELECT customer_idFROM customersWHERE cust_last_name='Roberts' AND credit_limit=600), 1000);
- B. INSERT INTO orders (order_id, order_date, order_mode,(SELECT customer idFROM customersWHERE cust_last_name='Roberts' AND credit_limit=600), order_total);VALUES (1,'10-mar-2007', 'direct', &customer_id, 1000);
- C. INSERT INTO ordersVALUES (1,'10-mar-2007', 'direct',(SELECT customer_idFROM customersWHERE cust_last_name='Roberts' AND credit_limit=600), 1000);
- D. INSERT INTO orders (order_id, order_date, order_mode,(SELECT customer_idFROM customersWHERE cust_last_name='Roberts' AND credit_limit=600), order_total);VALUES (1,'10-mar-2007', 'direct', &customer_id, 1000);

Answer: C

NEW QUESTION 152

In which three situations does a transaction complete?

- A. when a PL/SQL anonymous block is executed
- B. when a DELETE statement is executed
- C. when a ROLLBACK command is executed
- D. when a data definition language (DDL) statement is executed
- E. when a TRUNCATE statement is executed after the pending transaction

Answer: CDE

Explanation:

References:

https://docs.oracle.com/cd/B19306_01/server.102/b14220/transact.htm

NEW QUESTION 156

View the Exhibit and examine the structure of the EMP table which is not partitioned and not an index-organized table. (Choose two.)

EMP Name	Null?	Type
EMPNO	NOT NULL	NUMBER (4)
FIRST_NAME		VARCHAR2 (20)
LAST_NAME		VARCHAR2
SALARY		NUMBER (10, 2)
DEPTNO		NUMBER (2)

Evaluate this SQL statement: ALTER TABLE emp
 DROP COLUMN first_name; Which two statements are true?

- A. The FIRST_NAME column can be dropped even if it is part of a composite PRIMARY KEY provided the CASCADE option is added to the SQL statement.
- B. The FIRST_NAME column would be dropped provided at least one column remains in the table.
- C. The FIRST_NAME column would be dropped provided it does not contain any data.
- D. The drop of the FIRST_NAME column can be rolled back provided the SET UNUSED option is added to the SQL statement.

Answer: B

NEW QUESTION 160

View the Exhibits and examine PRODUCTS and SALES tables. Exhibit 1

Table PRODUCTS		
Name	Null?	Type
PROD_ID	NOT NULL	NUMBER (6)
PROD_NAME	NOT NULL	VARCHAR2 (50)
PROD_DESC	NOT NULL	VARCHAR2 (4000)
PROD_CATEGORY	NOT NULL	VARCHAR2 (50)
PROD_CATEGORY_ID	NOT NULL	NUMBER
PROD_UNIT_OF_MEASURE		VARCHAR2 (20)
SUPPLIER_ID	NOT NULL	NUMBER (6)
PROD_STATUS	NOT NULL	VARCHAR2 (20)
PROD_LIST_PRICE	NOT NULL	NUMBER (8, 2)
PROD_MIN_PRICE	NOT NULL	NUMBER (8, 2)

Exhibit 2

Table SALES		
Name	Null?	Type
PROD_ID	NOT NULL	NUMBER
CUST_ID	NOT NULL	NUMBER
TIME_ID	NOT NULL	DATE
CHANNEL_ID	NOT NULL	NUMBER
PROMO_ID	NOT NULL	NUMBER
QUANTITY_SOLD	NOT NULL	NUMBER (10, 2)

You issue the following query to display product name the number of times the product has been sold:

```
SOL>SELECT p.prod_name, i.item_cnt
FROM (SELECT prod_id, COUNT(*) item_cnt
      FROM sales
      GROUP BY prod_id) I RIGHT OUTER JOIN products p
ON i.prod_id = p.prod_id;
```

What happens when the above statement is executed?

- A. The statement executes successfully and produces the required output.
- B. The statement produces an error because a subquery in the FROM clause and outer-joins cannot be used together.
- C. The statement produces an error because the GROUP BY clause cannot be used in a subquery in the FROM clause.
- D. The statement produces an error because ITEM_CNT cannot be displayed in the outer query.

Answer: A

NEW QUESTION 164

Evaluate the following statement. INSERT ALL
 WHEN order_total < 10000 THEN INTO small_orders
 WHEN order_total > 10000 AND order_total < 20000 THEN INTO medium_orders
 WHEN order_total > 200000 THEN INTO large_orders
 SELECT order_id, order_total, customer_id FROM orders;
 Which statement is true regarding the evaluation of rows returned by the subquery in the INSERT statement?

- A. Each row is evaluated by the first WHEN clause and if the condition is false then the row would be evaluated by the subsequent when clauses.
- B. All rows are evaluated by all the three WHEN clauses.
- C. Each row is evaluated by the first WHEN clause and if the condition is true, then the row would be evaluated by the subsequent when clauses.
- D. The INSERT statement will return an error because the ELSE clause is missing.

Answer: B

NEW QUESTION 165

Which statement is true about an inner join specified in the WHERE clause of a query?

- A. It must have primary-key and foreign-key constraints defined on the columns used in the join condition.
- B. It requires the column names to be the same in all tables used for the join conditions.
- C. It is applicable for equijoin and nonequijoin conditions.
- D. It is applicable for only equijoin conditions.

Answer: C

NEW QUESTION 170

Examine the structure of the PROMOTIONS table: (Choose the best answer.)

NAME	NULL?	TYPE
PROMO_ID	NOT NULL	NUMBER(6)
PROMO_NAME	NOT NULL	VARCHAR2(30)
PROMO_CATEGORY	NOT NULL	VARCHAR2(30)
PROMO_COST	NOT NULL	NUMBER(10,2)


Management requires a report of unique promotion costs in each promotion category. Which query would satisfy this requirement?

- A. SELECT DISTINCT promo_category, promo_cost FROM promotions ORDER BY 1
- B. SELECT promo_category, DISTINCT promo_cost FROM promotions
- C. SELECT DISTINCT promo_cost, promo_category FROM promotions
- D. SELECT DISTINCT promo_cost, DISTINCT promo_category FROM promotions;

Answer: A

NEW QUESTION 171

View the Exhibit and examine the structure of the ORDERS table. The ORDER_ID column is the PRIMARY KEY in the ORDERS table.

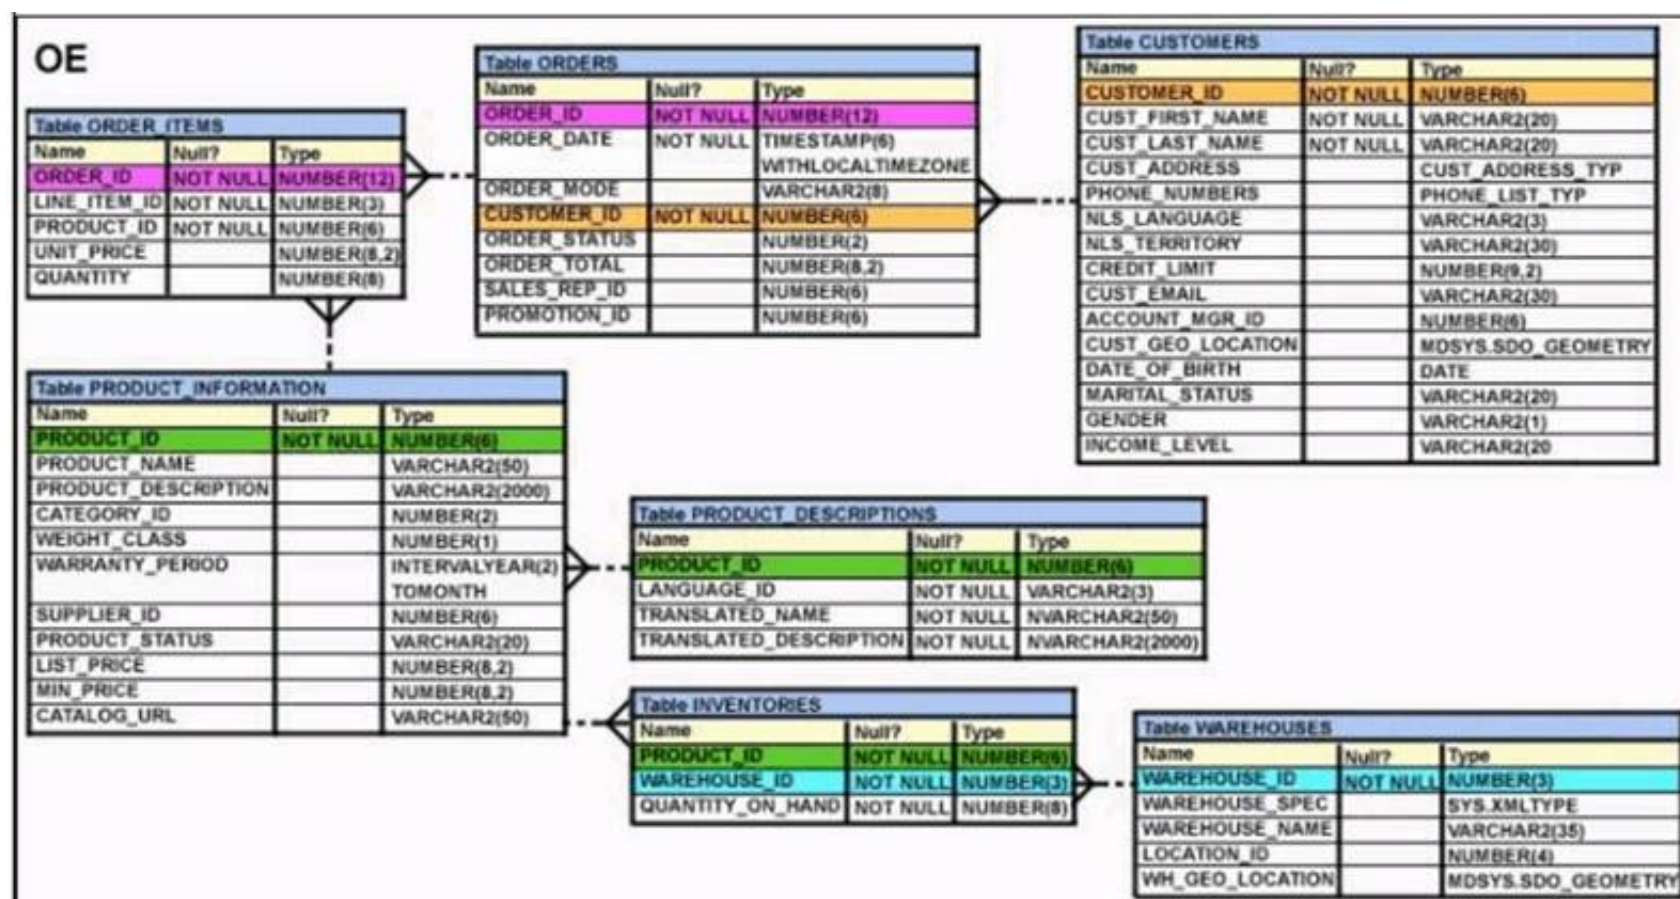

Evaluate the following CREATE TABLE command:

```
CREATE TABLE new_orders(ord_id, ord_date DEFAULT SYSDATE, cus_id) AS
```

```
SELECT order_id, order_date, customer_id FROM orders;
```

Which statement is true regarding the above command?

- A. The NEW_ODRDERS table would not get created because the DEFAULT value cannot be specified in the column definition.
- B. The NEW_ODRDERS table would get created and only the NOT NULL constraint defined on the specified columns would be passed to the new table.
- C. The NEW_ODRDERS table would not get created because the column names in the CREATE TABLE command and the SELECT clause do not match.
- D. The NEW_ODRDERS table would get created and all the constraints defined on the specified columns in the ORDERS table would be passed to the new table.

Answer: B

NEW QUESTION 174

Examine the commands used to create DEPARTMENT_DETAILS and COURSE_DETAILS:

```
SQL>CREATE TABLE DEPARTMENT_DETAILS
(DEPARTMENT_ID NUMBER PRIMARY KEY,
DEPARTMENT_NAME VARCHAR2(50),
HOD VARCHAR2(50));
SQL>CREATE TABLE COURSE_DETAILS
(COURSE_ID NUMBER PRIMARY KEY,
COURSE_NAME VARCHAR2(50),
DEPARTMENT_ID NUMBER REFERENCES DEPARTMENT_DETAILS
(DEPARTMENT_ID));
```

You want to generate a report that shows all course IDs irrespective of whether they have corresponding department IDs or not but no department IDs if they do not have any courses.

Which SQL statement must you use?

- A. SELECT course_id, department_id, FROM department_details d RIGHT OUTER JOIN course_details c USING (department_id)
- B. SELECT c.course_id, d.department_id FROM course_details c RIGHT OUTER JOIN department_details d ON (c.department_id=d.department_id)
- C. SELECT c.course_id, d.department_id FROM course_details c FULL OUTER JOIN department_details d ON (c.department_id=
- D. department_id)
- E. SELECT c.course_id, d.department_id FROM course_details c FULL OUTER JOIN department_details d ON (c.department_id<>
- F. department_id)

Answer: C

NEW QUESTION 176

Examine the structure of the SALES table. (Choose two.)

NAME	NULL?	TYPE
PRODUCT_ID	NOT NULL	NUMBER(10)
CUSTOMER_ID	NOT NULL	VARCHAR2(10)
TIME_ID	NOT NULL	DATE
CHANNEL_ID	NOT NULL	NUMBER(5)
PROMO_ID	NOT NULL	NUMBER(5)
QUANTITY_SOLD	NOT NULL	NUMBER(10, 2)
PRICE		NUMBER(10, 2)
AMOUNT_SOLD	NOT NULL	NUMBER(10, 2)

Examine this statement:

```
SQL > CREATE TABLE sales1 (prod_id, cust_id, quantity_sold, price) AS
SELECT product_id, customer_id, quantity_sold, price FROM sales
WHERE 1 = 2;
```

Which two statements are true about the SALES1 table?

- A. It will not be created because the column-specified names in the SELECT and CREATE TABLE clauses do not match.
- B. It will have NOT NULL constraints on the selected columns which had those constraints in the SALES table.
- C. It will not be created because of the invalid WHERE clause.
- D. It is created with no rows.
- E. It has PRIMARY KEY and UNIQUE constraints on the selected columns which had those constraints in the SALES table.

Answer: BD

NEW QUESTION 181

View the Exhibit and examine the data in the PRODUCT_INFORMATION table.

PRODUCT_INFORMATION				
PDT_ID	SUP_ID	PDT_STATUS	LIST_PRICE	MIN_PRICE
1797	102094	orderable	349	288
2254	102071	obsolete	453	371
2382	102050	under development	850	731
2459	102099	under development	699	568
3127	102087	orderable	498	444
3353	102071	obsolete	489	413
3354	102066	orderable	543	478

Which two tasks would require subqueries? (Choose two.)

- A. displaying all the products whose minimum list prices are more than average list price of products having the status orderable
- B. displaying the total number of products supplied by supplier 102071 and having product status OBSOLETE
- C. displaying the number of products whose list prices are more than the average list price
- D. displaying all supplier IDs whose average list price is more than 500
- E. displaying the minimum list price for each product status

Answer: AC

NEW QUESTION 182

Which two statements are true regarding subqueries? (Choose two.)

- A. A subquery can appear on either side of a comparison operator.
- B. Only two subqueries can be placed at one level.
- C. A subquery can retrieve zero or more rows.
- D. A subquery can be used only in SQL query statements.
- E. There is no limit on the number of subquery levels in the WHERE clause of a SELECT statement.

Answer: AC

NEW QUESTION 186


Which statement is true regarding the default behaviour of the ORDER by clause?

- A. Numeric values are displayed in descending order if they have decimal positions.
- B. Only columns that are specified in the SELECT list can be used in the ORDER by clause.
- C. In a character sort, the values are case-sensitive.
- D. NULLs are not including in the sort operation

Answer: C

NEW QUESTION 187

View the Exhibit and examine the structure of the EMPLOYEES table.
 You want to display all employees and their managers having 100 as the MANAGER_ID. You want the output in two columns: the first column would have the LAST_NAME of the managers and the second column would have LAST_NAME of the employees.

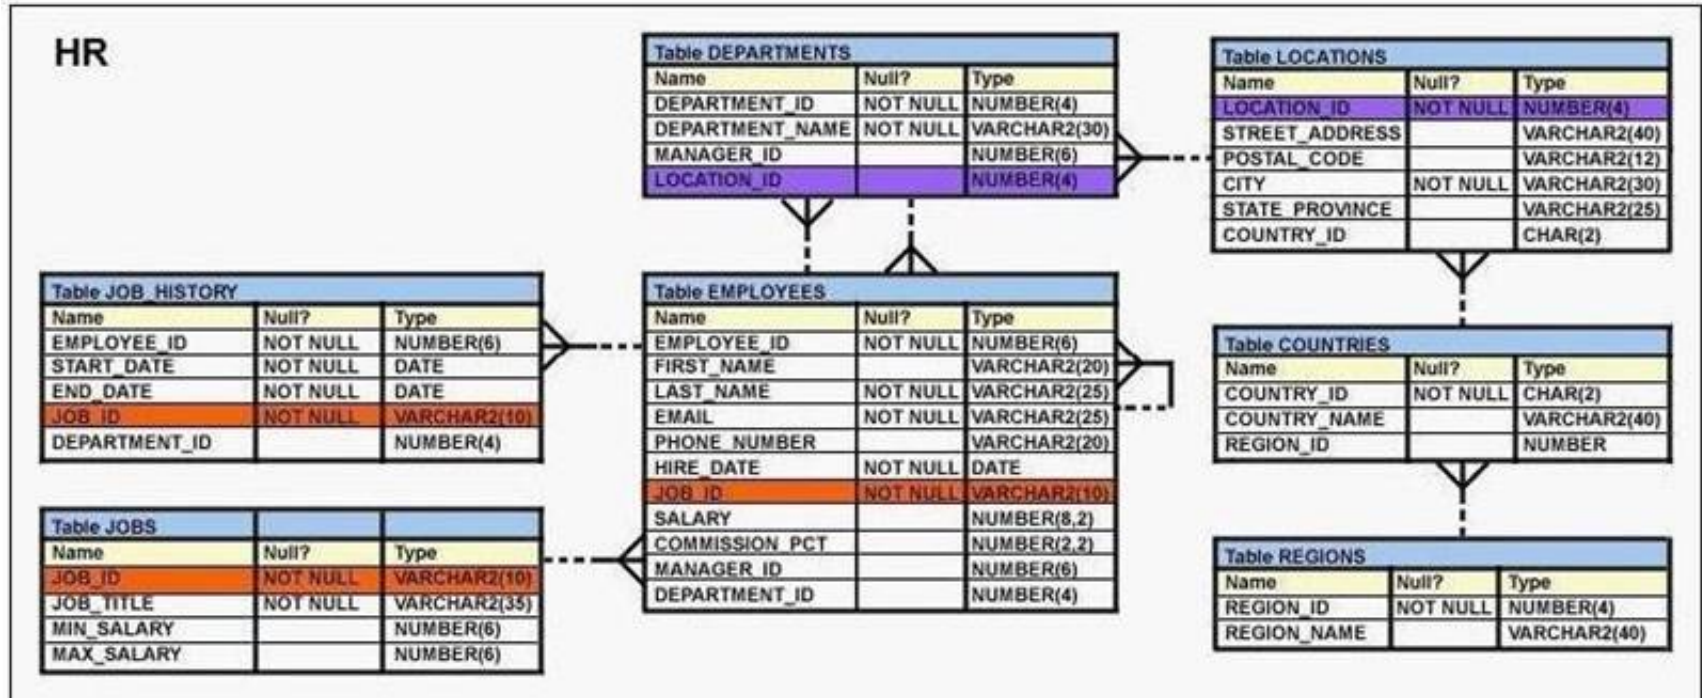

Which SQL statement would you execute?

- A. SELECT m.last_name "Manager", e.last_name "Employee" FROM employees m JOIN employees e ON m.employee_id = e.manager_id WHERE m.manager_id=100;
- B. SELECT m.last_name "Manager", e.last_name "Employee" FROM employees m JOIN employees e ON m.employee_id = e.manager_id WHERE e.manager_id=100;
- C. SELECT m.last_name "Manager", e.last_name "Employee" FROM employees m JOIN employees e ON e.employee_id = m.manager_id WHERE m.manager_id=100;
- D. SELECT m.last_name "Manager", e.last_name "Employee" FROM employees m JOIN employees e WHERE m.employee_id = e.manager_id AND e.manager_id=100;

Answer: B

NEW QUESTION 191

Examine the structure of the CUSTOMERS table: (Choose two.)

NAME	NULL?	TYPE
CUSTNO	NOT NULL	NUMBER(3)
CUSTNAME	NOT NULL	VARCHAR2(25)
CUSTADDRESS		VARCHAR2(35)
CUST_CREDIT_LIMIT		NUMBER(5)

CUSTNO is the PRIMARY KEY.
 You must determine if any customers' details have been entered more than once using a different CUSTNO, by listing all duplicate names.
 Which two methods can you use to get the required result?

- A. Subquery
- B. Self-join
- C. Full outer-join with self-join
- D. Left outer-join with self-join
- E. Right outer-join with self-join

Answer: AB

NEW QUESTION 196

Evaluate the following query:

```
SELECT INTERVAL '300' MONTH,
INTERVAL '54-2' YEAR TO MONTH,
INTERVAL '11:12:10.1234567' HOUR TO SECOND
FROM dual;
```

Which is the correct output of the above query?

- A. +00-300, +54-02, +00 11:12:10.123457
- B. +00-300, +00-650, +00 11:12:10.123457
- C. +25-00, +54-02, +00 11:12:10.123457
- D. +25-00, +00-650, +00 11:12:10.123457

Answer: C

NEW QUESTION 197

Examine this SELECT statement and view the Exhibit to see its output: (Choose two.)

CONSTRAINT_NAME	CON	SEARCH_CONDITION	R_CONSTRAINT_NAME	DELETE_RULE	STATUS
ORDER_DATE_NN	C	"ORDER_DATE" IS NOT NULL			ENABLED
ORDER_CUSTOMER_ID_NN	C	"CUSTOMER_ID" IS NOT NULL			ENABLED
ORDER_MODE_LOV	C	order_mode in ('direct', 'online')			ENABLED
ORDER_TOTAL-MIN	C	order_total >= 0			ENABLED
ORDER_PK	P				ENABLED
ORDERS-CUSTOMER-ID	R		CUSTOMERS_ID	SET NULL	ENABLED
ORDERS-SALES-REP	R		EMP_EMP_ID	SET NULL	ENABLED

SELECT constraints_name, constraints_type, search_condition, r_constraints_name, delete_rule, status, FROM user_constraints
WHERE table_name = 'ORDERS';
Which two statements are true about the output?

- A. The DELETE_RULE column indicates the desired state of related rows in the child table when the corresponding row is deleted from the parent table.
- B. The R_CONSTRAINT_NAME column contains an alternative name for the constraint.
- C. In the second column, 'c' indicates a check constraint.
- D. The STATUS column indicates whether the table is currently in use.

Answer: AC

NEW QUESTION 200

See the Exhibit and examine the structure of the PROMOTIONS table:

Table PROMOTIONS		
Name	Null?	Type
PROMO_ID	NOT NULL	NUMBER(6)
PROMO_NAME	NOT NULL	VARCHAR2(30)
PROMO_SUBCATEGORY	NOT NULL	VARCHAR2(30)
PROMO_SUBCATEGORY_ID	NOT NULL	NUMBER
PROMO_CATEGORY	NOT NULL	VARCHAR2(30)
PROMO_CATEGORY_ID	NOT NULL	NUMBER
PROMO_COST	NOT NULL	NUMBER(10,2)
PROMO_BEGIN_DATE	NOT NULL	DATE
PROMO_END_DATE	NOT NULL	DATE

Using the PROMOTIONS table,
you need to find out the average cost for all promos in the range \$0-2000 and \$2000-5000 in category A.
You issue the following SQL statements:

```
SQL>SELECT AVG(CASE
                WHEN promo_cost BETWEEN 0 AND 2000 AND promo_category='A'
                THEN promo_cost
                ELSE null END) "CAT_2000A",
        AVG(CASE
                WHEN promo_cost BETWEEN 2001 AND 5000 AND promo_category='A'
                THEN promo_cost
                ELSE null END) "CAT_5000A"
        FROM promotions;
```

What would be the outcome?

- A. It generates an error because multiple conditions cannot be specified for the WHEN clause.
- B. It executes successfully and gives the required result.
- C. It generates an error because CASE cannot be used with group functions.
- D. It generates an error because NULL cannot be specified as a return value.

Answer: B

Explanation:

CASE Expression

Facilitates conditional inquiries by doing the work of an IF-THEN-ELSE statement:

CASE expr WHEN comparison_expr1 THEN return_expr1 [WHEN comparison_expr2 THEN return_expr2

WHEN comparison_exprn THEN return_exprn ELSE else_expr]

END

NEW QUESTION 205

The BOOKS_TRANSACTIONS table exists in your database. SQL>SELECT * FROM books_transactions ORDER BY 3; What is the outcome on execution?

- A. The execution fails unless the numeral 3 in the ORDER BY clause is replaced by a column name.
- B. Rows are displayed in the order that they are stored in the table only for the three rows with the lowest values in the key column.
- C. Rows are displayed in the order that they are stored in the table only for the first three rows.
- D. Rows are displayed sorted in ascending order of the values in the third column in the table.

Answer: D

NEW QUESTION 207

Which three statements are true about the ALTER TABLE....DROP COLUMN.... command?

- A. A column can be dropped only if it does not contain any data.
- B. A column can be dropped only if another column exists in the table.
- C. A dropped column can be rolled back.
- D. The column in a composite PRIMARY KEY with the CASCADE option can be dropped.
- E. A parent key column in the table cannot be dropped.

Answer: BDE

NEW QUESTION 211

View the exhibit and examine the data in ORDERS_MASTER and MONTHLY_ORDERS tables.

ORDERS_MASTER ORDER_ID ORDER_TOTAL

1
1000
2
2000
3
3000
4

MONTHLY_ORDERS ORDER_ID ORDER_TOTAL

2
2500
3

Evaluate the following MERGE statement: MERGE INTO orders_master o

USING monthly_orders m ON (o.order_id = m.order_id) WHEN MATCHED THEN

UPDATE SET o.order_total = m.order_total DELETE WHERE (m.order_total IS NULL) WHEN NOT MATCHED THEN

INSERT VALUES (m.order_id, m.order_total)

What would be the outcome of the above statement?

- A. The ORDERS_MASTER table would contain the ORDER_IDs 1, 2, 3 and 4.
- B. The ORDERS_MASTER table would contain the ORDER_IDs 1, 2 and 4.
- C. The ORDERS_MASTER table would contain the ORDER_IDs 1, 2 and 3.
- D. The ORDERS_MASTER table would contain the ORDER_IDs 1 and 2.

Answer: B

Explanation:

References:

https://docs.oracle.com/cd/B28359_01/server.111/b28286/statements_9016.htm

NEW QUESTION 212

Which two statements are true regarding working with dates? (Choose two.)

- A. The RR date format automatically calculates the century from the SYSDATE function but allows the session user to enter the century.
- B. The RR date format automatically calculates the century from the SYSDATE function and does not allow a session user to enter the century.
- C. The default internal storage of dates is in character format.
- D. The default internal storage of dates is in numeric format.

Answer: AD

NEW QUESTION 214

You notice a performance change in your production Oracle 12c database. You want to know which change caused this performance difference.

Which method or feature should you use?

- A. Compare Period ADDM report.
- B. AWR Compare Period report.
- C. Active Session History (ASH) report.
- D. Taking a new snapshot and comparing it with a preserved snapshot.

Answer: B

NEW QUESTION 219

Examine the structure of the MEMBERS table: NameNull?Type

----- MEMBER_IDNOT NULLVARCHAR2 (6)

FIRST_NAMEVARCHAR2 (50)

LAST_NAMENOT NULLVARCHAR2 (50)

ADDRESSVARCHAR2 (50)

You execute the SQL statement:

SQL > SELECT member_id, ' ', first_name, ' ', last_name "ID FIRSTNAME LASTNAME " FROM members;

What is the outcome?

- A. It fails because the alias name specified after the column names is invalid.
- B. It fails because the space specified in single quotation marks after the first two column names is invalid.
- C. It executes successfully and displays the column details in a single column with only the alias column heading.
- D. It executes successfully and displays the column details in three separate columns and replaces only the last column heading with the alias.

Answer: D

NEW QUESTION 221

Which two statements are true regarding roles? (Choose two.)

- A. A role can be granted to itself.
- B. A role can be granted to PUBLIC.
- C. A user can be granted only one role at any point of time.
- D. The REVOKE command can be used to remove privileges but not roles from other users.
- E. Roles are named groups of related privileges that can be granted to users or other roles.

Answer: BE

Explanation:

References:

http://docs.oracle.com/cd/E25054_01/network.11111/e16543/authorization.htm#autold28

NEW QUESTION 226

You issued this command:

CHOOSE THREE

SQL > DROP TABLE employees; Which three statements are true?

- A. Sequences used in the EMPLOYEES table become invalid.
- B. If there is an uncommitted transaction in the session, it is committed.
- C. All indexes and constraints defined on the table being dropped are also dropped.
- D. The space used by the EMPLOYEES table is always reclaimed immediately.
- E. The EMPLOYEES table can be recovered using the ROLLBACK command.
- F. The EMPLOYEES table may be moved to the recycle bin.

Answer: BCF

NEW QUESTION 228

View the Exhibit and examine the data in the employees table.

EMPLOYEES			
ENAME	HIREDATE	SAL	COMM
SMITH	17-DEC-00	800	
ALLEN	20-FEB-99	1600	300
WARD	22-FEB-95	1250	500
JONES	02-APR-98	2975	
MARTIN	28-SEP-99	1250	1400
BLAKE	01-MAY-97	2850	

You want to generate a report showing the total compensation paid to each employee to date. You issue the following query:

```
SQL>SELECT ename ||' joined on '|| hiredate ||
', the total compensation paid is '||
TO_CHAR(ROUND(ROUND(SYSDATE-hiredate)/365) * sal + comm)
"COMPENSATION UNTIL DATE"
FROM employees;
```

What is the outcome?

- A. It executes successfully but does not give the correct output.
- B. It generates an error because the concatenation operator can be used to combine only two items.

- C. It generates an error because the usage of the round function in the expression is not valid
- D. It generates an error because the alias is not valid.
- E. It executes successfully and gives the correct output.

Answer: A

NEW QUESTION 232

Which two statements are true regarding the WHERE and HAVING clauses in a SELECT statement? (Choose two.)

- A. The WHERE and HAVING clauses can be used in the same statement only if they are applied to different columns in the table.
- B. The aggregate functions and columns used in the HAVING clause must be specified in the SELECT list of the query.
- C. The WHERE clause can be used to exclude rows after dividing them into groups.
- D. The HAVING clause can be used with aggregate functions in subqueries.
- E. The WHERE clause can be used to exclude rows before dividing them into groups.

Answer: CD

NEW QUESTION 234

Examine the structure of the INVOICE table. NameNull?Type

----- INV_NONOT NULLNUMBER(3) INV_DATEDATE INV_AMTNUMBER(10,2)

Which two SQL statements would execute successfully?

- A. SELECT inv_no, NVL2(inv_date, 'Pending', 'Incomplete')FROM invoice;
- B. SELECT inv_no, NVL2(inv_amt, inv_date, 'Not Available')FROM invoice;
- C. SELECT inv_no, NVL2(inv_date, sysdate-inv_date, sysdate)FROM invoice;
- D. SELECT inv_no, NVL2(inv_amt, inv_amt*.25, 'Not Available')FROM invoice;

Answer: AC

NEW QUESTION 239

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

1Z0-071 Practice Exam Features:

- * 1Z0-071 Questions and Answers Updated Frequently
- * 1Z0-071 Practice Questions Verified by Expert Senior Certified Staff
- * 1Z0-071 Most Realistic Questions that Guarantee you a Pass on Your First Try
- * 1Z0-071 Practice Test Questions in Multiple Choice Formats and Updates for 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 1Z0-071 Practice Test Here](#)