

Amazon

Exam Questions AWS-Solution-Architect-Associate

AWS Certified Solutions Architect - Associate



NEW QUESTION 1

You have set up an Auto Scaling group. The cool down period for the Auto Scaling group is 7 minutes. The first instance is launched after 3 minutes, while the second instance is launched after 4 minutes. How many minutes after the first instance is launched will Auto Scaling accept another scaling actMty request?

- A. 11 minutes
- B. 7 minutes
- C. 10 minutes
- D. 14 minutes

Answer: A

Explanation: If an Auto Scaling group is launching more than one instance, the cool down period for each instance starts after that instance is launched. The group remains locked until the last instance that was launched has completed its cool down period. In this case the cool down period for the first instance starts after 3 minutes and finishes at the 10th minute (3+7 cool down), while for the second instance it starts at the 4th minute and finishes at the 11th minute (4+7 cool down). Thus, the Auto Scaling group will receive another request only after 11 minutes.

Reference: http://docs.aws.amazon.com/AutoScaling/latest/DeveloperGuide/AS_Concepts.html

NEW QUESTION 2

Can a user get a notification of each instance start / terminate configured with Auto Scaling?

- A. Yes, if configured with the Launch Config
- B. Yes, always
- C. Yes, if configured with the Auto Scaling group
- D. No

Answer: C

Explanation: The user can get notifications using SNS if he has configured the notifications while creating the Auto Scaling group.

Reference: <http://docs.aws.amazon.com/AutoScaling/latest/DeveloperGuide/GettingStartedTutorial.html>

NEW QUESTION 3

One of the criteria for a new deployment is that the customer wants to use AWS Storage Gateway. However you are not sure whether you should use gateway-cached volumes or gateway-stored volumes or even what the differences are. Which statement below best describes those differences?

- A. Gateway-cached lets you store your data in Amazon Simple Storage Service (Amazon S3) and retain a copy of frequently accessed data subsets locally
- B. Gateway-stored enables you to configure your on-premises gateway to store all your data locally and then asynchronously back up point-in-time snapshots of this data to Amazon S3.
- C. Gateway-cached is free whilst gateway-stored is not.
- D. Gateway-cached is up to 10 times faster than gateway-stored.
- E. Gateway-stored lets you store your data in Amazon Simple Storage Service (Amazon S3) and retain a copy of frequently accessed data subsets locally
- F. Gateway-cached enables you to configure your on-premises gateway to store all your data locally and then asynchronously back up point-in-time snapshots of this data to Amazon S3.

Answer: A

Explanation: Volume gateways provide cloud-backed storage volumes that you can mount as Internet Small Computer System Interface (iSCSI) devices from your on-premises application servers. The gateway supports the following volume configurations:

Gateway-cached volumes — You store your data in Amazon Simple Storage Service (Amazon S3) and retain a copy of frequently accessed data subsets locally. Gateway-cached volumes offer a substantial cost savings on primary storage and minimize the need to scale your storage on-premises. You also retain low-latency access to your frequently accessed data.

Gateway-stored volumes — If you need low-latency access to your entire data set, you can configure your on-premises gateway to store all your data locally and then asynchronously back up point-in-time snapshots of this data to Amazon S3. This configuration provides durable and inexpensive off-site backups that you can recover to your local data center or Amazon EC2. For example, if you need replacement capacity for disaster recovery, you can recover the backups to Amazon EC2.

Reference: <http://docs.aws.amazon.com/storagegateway/latest/userguide/volume-gateway.html>

NEW QUESTION 4

A user is launching an EC2 instance in the US East region. Which of the below mentioned options is recommended by AWS with respect to the selection of the availability zone?

- A. Always select the AZ while launching an instance
- B. Always select the US-East-1-a zone for HA
- C. Do not select the AZ; instead let AWS select the AZ
- D. The user can never select the availability zone while launching an instance

Answer: C

Explanation: When launching an instance with EC2, AWS recommends not to select the availability zone (AZ). AWS specifies that the default Availability Zone should be accepted. This is because it enables AWS to select the best Availability Zone based on the system health and available capacity. If the user launches additional instances, only then an Availability Zone should be specified. This is to specify the same or different AZ from the running instances.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/using-regions-availability-zones.html>

NEW QUESTION 5

A user is storing a large number of objects on AWS S3. The user wants to implement the search functionality among the objects. How can the user achieve this?

- A. Use the indexing feature of S3.
- B. Tag the objects with the metadata to search on that.
- C. Use the query functionality of S3.
- D. Make your own DB system which stores the S3 metadata for the search functionalit

Answer: D

Explanation: In Amazon Web Services, AWS S3 does not provide any query facility. To retrieve a specific object the user needs to know the exact bucket / object key. In this case it is recommended to have an own DB system which manages the S3 metadata and key mapping.

Reference: http://media.amazonwebservices.com/AWS_Storage_Options.pdf

NEW QUESTION 6

What is a placement group in Amazon EC2?

- A. It is a group of EC2 instances within a single Availability Zone.
- B. It the edge location of your web content.
- C. It is the AWS region where you run the EC2 instance of your web content.
- D. It is a group used to span multiple Availability Zone

Answer: A

Explanation: A placement group is a logical grouping of instances within a single Availability Zone. Reference:

<http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/placement-groups.html>

NEW QUESTION 7

You are migrating an internal server on your DC to an EC2 instance with EBS volume. Your server disk usage is around 500GB so you just copied all your data to a 2TB disk to be used with AWS Import/Export. Where will the data be imported once it arrives at Amazon?

- A. to a 2TB EBS volume
- B. to an S3 bucket with 2 objects of 1TB
- C. to an 500GB EBS volume
- D. to an S3 bucket as a 2TB snapshot

Answer: B

Explanation: An import to Amazon EBS will have different results depending on whether the capacity of your storage device is less than or equal to 1 TB or greater than 1 TB. The maximum size of an Amazon EBS snapshot is 1 TB, so if the device image is larger than 1 TB, the image is chunked and stored on Amazon S3. The target location is determined based on the total capacity of the device, not the amount of data on the device.

Reference: <http://docs.aws.amazon.com/AWSImportExport/latest/DG/Concepts.html>

NEW QUESTION 8

True or false? A VPC contains multiple subnets, where each subnet can span multiple Availability Zones.

- A. This is true only if requested during the set-up of VPC.
- B. This is true.
- C. This is false.
- D. This is true only for US region

Answer: C

Explanation: A VPC can span several Availability Zones. In contrast, a subnet must reside within a single Availability Zone.

Reference: <https://aws.amazon.com/vpc/faqs/>

NEW QUESTION 9

An edge location refers to which Amazon Web Service?

- A. An edge location is referred to the network configured within a Zone or Region
- B. An edge location is an AWS Region
- C. An edge location is the location of the data center used for Amazon CloudFront.
- D. An edge location is a Zone within an AWS Region

Answer: C

Explanation: Amazon CloudFront is a content distribution network. A content delivery network or content distribution network (CDN) is a large distributed system of servers deployed in multiple data centers across the world. The location of the data center used for CDN is called edge location.

Amazon CloudFront can cache static content at each edge location. This means that your popular static content (e.g., your site's logo, navigational images, cascading style sheets, JavaScript code, etc.) will be available at a nearby edge location for the browsers to download with low latency and improved performance for viewers. Caching popular static content with Amazon CloudFront also helps you offload requests for such files from your origin server — CloudFront serves the cached copy when available and only makes a request to your origin server if the edge location receiving the browser's request does not have a copy of the file.

Reference: <http://aws.amazon.com/cloudfront/>

NEW QUESTION 10

You are looking at ways to improve some existing infrastructure as it seems a lot of engineering resources are being taken up with basic management and monitoring tasks and the costs seem to be excessive.

You are thinking of deploying Amazon ElastiCache to help. Which of the following statements is true in regards to ElastiCache?

- A. You can improve load and response times to user actions and queries however the cost associated with scaling web applications will be more.
- B. You can't improve load and response times to user actions and queries but you can reduce the cost associated with scaling web applications.
- C. You can improve load and response times to user actions and queries however the cost associated with scaling web applications will remain the same.
- D. You can improve load and response times to user actions and queries and also reduce the cost associated with scaling web applications.

Answer: D

Explanation: Amazon ElastiCache is a web service that makes it easy to deploy and run Memcached or Redis protocol-compliant server nodes in the cloud. Amazon ElastiCache improves the performance of web applications by allowing you to retrieve information from a fast, managed, in-memory caching system, instead of relying entirely on slower disk-based databases. The service simplifies and offloads the management, monitoring and operation of in-memory cache environments, enabling your engineering resources to focus on developing applications.

Using Amazon ElastiCache, you can not only improve load and response times to user actions and queries, but also reduce the cost associated with scaling web applications.

Reference: <https://aws.amazon.com/elasticache/faqs/>

NEW QUESTION 10

Your manager has just given you access to multiple VPN connections that someone else has recently set up between all your company's offices. She needs you to make sure that the communication between the VPNs is secure. Which of the following services would be best for providing a low-cost hub-and-spoke model for primary or backup connectivity between these remote offices?

- A. Amazon CloudFront
- B. AWS Direct Connect
- C. AWS CloudHSM
- D. AWS VPN CloudHub

Answer: D

Explanation: If you have multiple VPN connections, you can provide secure communication between sites using the AWS VPN CloudHub. The VPN CloudHub operates on a simple hub-and-spoke model that you can use with or without a VPC. This design is suitable for customers with multiple branch offices and existing Internet connections who would like to implement a convenient, potentially low-cost hub-and-spoke model for primary or backup connectivity between these remote offices.

Reference: http://docs.aws.amazon.com/AmazonVPC/latest/UserGuide/VPN_CloudHub.html

NEW QUESTION 13

A user has created an EBS volume with 1000 IOPS. What is the average IOPS that the user will get for most of the year as per EC2 SLA if the instance is attached to the EBS optimized instance?

- A. 950
- B. 990
- C. 1000
- D. 900

Answer: D

Explanation: As per AWS SLA if the instance is attached to an EBS-Optimized instance, then the Provisioned IOPS volumes are designed to deliver within 10% of the provisioned IOPS performance 99.9% of the time in a given year. Thus, if the user has created a volume of 1000 IOPS, the user will get a minimum 900 IOPS 99.9% time of the year.

Reference: <http://aws.amazon.com/ec2/faqs/>

NEW QUESTION 16

A user wants to use an EBS-backed Amazon EC2 instance for a temporary job. Based on the input data, the job is most likely to finish within a week. Which of the following steps should be followed to terminate the instance automatically once the job is finished?

- A. Configure the EC2 instance with a stop instance to terminate it.
- B. Configure the EC2 instance with ELB to terminate the instance when it remains idle.
- C. Configure the CloudWatch alarm on the instance that should perform the termination action once the instance is idle.
- D. Configure the Auto Scaling schedule action that terminates the instance after 7 day

Answer: C

Explanation: Auto Scaling can start and stop the instance at a pre-defined time. Here, the total running time is unknown. Thus, the user has to use the CloudWatch alarm, which monitors the CPU utilization. The user can create an alarm that is triggered when the average CPU utilization percentage has been lower than 10 percent

for 24 hours, signaling that it is idle and no longer in use. When the utilization is below the threshold limit, it will terminate the instance as a part of the instance action.

Reference: <http://docs.aws.amazon.com/AmazonCloudWatch/latest/DeveloperGuide/UsingAlarmActions.html>

NEW QUESTION 17

In Amazon EC2, partial instance-hours are billed .

- A. per second used in the hour
- B. per minute used
- C. by combining partial segments into full hours
- D. as full hours

Answer: D

Explanation: Partial instance-hours are billed to the next hour. Reference: <http://aws.amazon.com/ec2/faqs/>

NEW QUESTION 19

In EC2, what happens to the data in an instance store if an instance reboots (either intentionally or unintentionally)?

- A. Data is deleted from the instance store for security reasons.
- B. Data persists in the instance store.
- C. Data is partially present in the instance store.
- D. Data in the instance store will be lost

Answer: B

Explanation: The data in an instance store persists only during the lifetime of its associated instance. If an instance reboots (intentionally or unintentionally), data in the instance store persists. However, data on instance store volumes is lost under the following circumstances.

Failure of an underlying drive

Stopping an Amazon EBS-backed instance Terminating an instance

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/InstanceStorage.html>

NEW QUESTION 23

You are setting up a VPC and you need to set up a public subnet within that VPC. Which following requirement must be met for this subnet to be considered a public subnet?

- A. Subnet's traffic is not routed to an internet gateway but has its traffic routed to a virtual private gateway.
- B. Subnet's traffic is routed to an internet gateway.
- C. Subnet's traffic is not routed to an internet gateway.
- D. None of these answers can be considered a public subnet

Answer: B

Explanation: A virtual private cloud (VPC) is a virtual network dedicated to your AWS account. It is logically isolated from other virtual networks in the AWS cloud. You can launch your AWS resources, such as Amazon EC2 instances, into your VPC. You can configure your VPC: you can select its IP address range, create subnets, and configure route tables, network gateways, and security settings.

A subnet is a range of IP addresses in your VPC. You can launch AWS resources into a subnet that you select. Use a public subnet for resources that must be connected to the internet, and a private subnet for resources that won't be connected to the Internet.

If a subnet's traffic is routed to an internet gateway, the subnet is known as a public subnet.

If a subnet doesn't have a route to the internet gateway, the subnet is known as a private subnet.

If a subnet doesn't have a route to the internet gateway, but has its traffic routed to a virtual private gateway, the subnet is known as a VPN-only subnet.

Reference: http://docs.aws.amazon.com/AmazonVPC/latest/UserGuide/VPC_Subnets.html

NEW QUESTION 25

While using the EC2 GET requests as URLs, the is the URL that serves as the entry point for the web service.

- A. token
- B. endpoint
- C. action
- D. None of these

Answer: B

Explanation: The endpoint is the URL that serves as the entry point for the web service.

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/using-query-api.html>

NEW QUESTION 30

You have been asked to build a database warehouse using Amazon Redshift. You know a little about it, including that it is a SQL data warehouse solution, and uses industry standard ODBC and JDBC connections and PostgreSQL drivers. However you are not sure about what sort of storage it uses for database tables. What sort of storage does Amazon Redshift use for database tables?

- A. InnoDB Tables
- B. NDB data storage
- C. Columnar data storage
- D. NDB CLUSTER Storage

Answer: C

Explanation: Amazon Redshift achieves efficient storage and optimum query performance through a combination of massively parallel processing, columnar data storage, and very efficient, targeted data compression encoding schemes.

Columnar storage for database tables is an important factor in optimizing analytic query performance because it drastically reduces the overall disk I/O

requirements and reduces the amount of data you need to load from disk.

Reference: http://docs.aws.amazon.com/redshift/latest/dg/c_columnar_storage_disk_mem_mgmnt.html

NEW QUESTION 33

You are building infrastructure for a data warehousing solution and an extra request has come through that there will be a lot of business reporting queries running all the time and you are not sure if your current DB instance will be able to handle it. What would be the best solution for this?

- A. DB Parameter Groups
- B. Read Replicas
- C. Multi-AZ DB Instance deployment
- D. Database Snapshots

Answer: B

Explanation: Read Replicas make it easy to take advantage of MySQL's built-in replication functionality to elastically scale out beyond the capacity constraints of a single DB Instance for read-heavy database workloads. There are a variety of scenarios where deploying one or more Read Replicas for a given source DB Instance may make sense. Common reasons for deploying a Read Replica include:

Scaling beyond the compute or I/O capacity of a single DB Instance for read-heavy database workloads. This excess read traffic can be directed to one or more Read Replicas.

Serving read traffic while the source DB Instance is unavailable. If your source DB Instance cannot take I/O requests (e.g. due to I/O suspension for backups or scheduled maintenance), you can direct read traffic to your Read Replica(s). For this use case, keep in mind that the data on the Read Replica may be "stale" since the source DB Instance is unavailable.

Business reporting or data warehousing scenarios; you may want business reporting queries to run against a Read Replica, rather than your primary, production DB Instance.

Reference: <https://aws.amazon.com/rds/faqs/>

NEW QUESTION 36

Much of your company's data does not need to be accessed often, and can take several hours for retrieval time, so it's stored on Amazon Glacier. However someone within your organization has expressed concerns that his data is more sensitive than the other data, and is wondering whether the high level of encryption that he knows is on S3 is also used on the much cheaper Glacier service. Which of the following statements would be most applicable in regards to this concern?

- A. There is no encryption on Amazon Glacier, that's why it is cheaper.
- B. Amazon Glacier automatically encrypts the data using AES-128 a lesser encryption method than Amazon S3 but you can change it to AES-256 if you are willing to pay more.
- C. Amazon Glacier automatically encrypts the data using AES-256, the same as Amazon S3.
- D. Amazon Glacier automatically encrypts the data using AES-128 a lesser encryption method than Amazon S3.

Answer: C

Explanation: Like Amazon S3, the Amazon Glacier service provides low-cost, secure, and durable storage. But where S3 is designed for rapid retrieval, Glacier is meant to be used as an archival service for data that is not accessed often, and for which retrieval times of several hours are suitable.

Amazon Glacier automatically encrypts the data using AES-256 and stores it durably in an immutable form. Amazon Glacier is designed to provide average annual durability of 99.999999999% for an archive. It stores each archive in multiple facilities and multiple devices. Unlike traditional systems which can require laborious data verification and manual repair, Glacier performs regular, systematic data integrity checks, and is built to be automatically self-healing.

Reference: <http://d0.awsstatic.com/whitepapers/Security/AWS%20Security%20Whitepaper.pdf>

NEW QUESTION 41

In Amazon EC2 Container Service, are other container types supported?

- A. Yes, EC2 Container Service supports any container service you need.
- B. Yes, EC2 Container Service also supports Microsoft container service.
- C. No, Docker is the only container platform supported by EC2 Container Service presently.
- D. Yes, EC2 Container Service supports Microsoft container service and Openstac

Answer: C

Explanation: In Amazon EC2 Container Service, Docker is the only container platform supported by EC2 Container Service presently.

Reference: <http://aws.amazon.com/ecs/faqs/>

NEW QUESTION 43

is a fast, filexible, fully managed push messaging service.

- A. Amazon SNS
- B. Amazon SES
- C. Amazon SQS
- D. Amazon FPS

Answer: A

Explanation: Amazon Simple Notification Service (Amazon SNS) is a fast, filexible, fully managed push messaging service. Amazon SNS makes it simple and cost-effective to push to mobile devices such as iPhone, iPad, Android, Kindle Fire, and internet connected smart devices, as well as pushing to other distributed services.

Reference: http://aws.amazon.com/sns/?nc1=h_I2_as

NEW QUESTION 45

As AWS grows, most of your clients' main concerns seem to be about security, especially when all of their competitors also seem to be using AWS. One of your clients asks you whether having a competitor who hosts their EC2 instances on the same physical host would make it easier for the competitor to hack into the client's data. Which of the following statements would be the best choice to put your client's mind at rest?

- A. Different instances running on the same physical machine are isolated from each other via a 256-bit Advanced Encryption Standard (AES-256).
- B. Different instances running on the same physical machine are isolated from each other via the Xen hypervisor and via a 256-bit Advanced Encryption Standard (AES-256).
- C. Different instances running on the same physical machine are isolated from each other via the Xen hypervisor.
- D. Different instances running on the same physical machine are isolated from each other via IAM permissions.

Answer: C

Explanation: Amazon Elastic Compute Cloud (EC2) is a key component in Amazon's Infrastructure as a Service (IaaS), providing resizable computing capacity using server instances in AWS's data centers. Amazon EC2 is designed to make web-scale computing easier by enabling you to obtain and configure capacity with minimal friction.

You create and launch instances, which are collections of platform hardware and software. Different instances running on the same physical machine are isolated from each other via the Xen hypervisor.

Amazon is active in the Xen community, which provides awareness of the latest developments. In addition, the AWS firewall resides within the hypervisor layer, between the physical network interface and the instance's virtual interface. All packets must pass through this layer, thus an instance's neighbors have no more access to that instance than any other host on the Internet and can be treated as if they are on separate physical hosts. The physical RAM is separated using similar mechanisms.

Reference: <http://d0.awsstatic.com/whitepapers/Security/AWS%20Security%20Whitepaper.pdf>

NEW QUESTION 49

A user has launched 10 EC2 instances inside a placement group. Which of the below mentioned statements is true with respect to the placement group?

- A. All instances must be in the same AZ
- B. All instances can be across multiple regions
- C. The placement group cannot have more than 5 instances
- D. All instances must be in the same region

Answer: A

Explanation: A placement group is a logical grouping of EC2 instances within a single Availability Zone. Using placement groups enables applications to participate in a low-latency, 10 Gbps network. Placement groups are recommended for applications that benefit from low network latency, high network throughput or both.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/placement-groups.html>

NEW QUESTION 53

Which of the following AWS CLI commands is syntactically incorrect?

- 1. `$ aws ec2 describe-instances`
- 2. `$ aws ec2 start-instances --instance-ids i-1348636c`
- 3. `$ aws sns publish --topic-arn arn:aws:sns:us-east-1:546419318123:OperationsError -message "Script Failure"`
- 4. `$ aws sqs receive-message --queue-url https://queue.amazonaws.com/546419318123/Test`

- A. 3
- B. 4
- C. 2
- D. 1

Answer: A

Explanation: The following CLI command is missing a hyphen before "-message".

`aws sns publish --topic-arn arn:aws:sns:us-east-1:546419318123:OperationsError -message "Script Failure"`

It has been added below in red

`aws sns publish --topic-arn arn:aws:sns:us-east-1:546419318123:OperationsError ---message "Script Failure"`

Reference: <http://aws.amazon.com/cji/>

NEW QUESTION 55

An organization has developed a mobile application which allows end users to capture a photo on their mobile device, and store it inside an application. The application internally uploads the data to AWS S3. The organization wants each user to be able to directly upload data to S3 using their Google ID. How will the mobile app allow this?

- A. Use the AWS Web identity federation for mobile applications, and use it to generate temporary security credentials for each user.
- B. It is not possible to connect to AWS S3 with a Google ID.
- C. Create an IAM user every time a user registers with their Google ID and use IAM to upload files to S3.
- D. Create a bucket policy with a condition which allows everyone to upload if the login ID has a Google part to it.

Answer: A

Explanation: For Amazon Web Services, the Web identity federation allows you to create cloud-backed mobile apps that use public identity providers, such as login with Facebook, Google, or Amazon. It will create temporary security credentials for each user, which will be authenticated by the AWS services, such as S3.

Reference: <http://docs.aws.amazon.com/STS/latest/UsingSTS/CreatingWIF.html>

NEW QUESTION 56

You are architecting an auto-scalable batch processing system using video processing pipelines and Amazon Simple Queue Service (Amazon SQS) for a customer. You are unsure of the limitations of SQS and need to find out. What do you think is a correct statement about the limitations of Amazon SQS?

- A. It supports an unlimited number of queues but a limited number of messages per queue for each user but automatically deletes messages that have been in the queue for more than 4 weeks.
- B. It supports an unlimited number of queues and unlimited number of messages per queue for each user but automatically deletes messages that have been in the queue for more than 4 days.
- C. It supports an unlimited number of queues but a limited number of messages per queue for each user but automatically deletes messages that have been in the queue for more than 4 days.
- D. It supports an unlimited number of queues and unlimited number of messages per queue for each user but automatically deletes messages that have been in the queue for more than 4 weeks.

Answer: B

Explanation: Amazon Simple Queue Service (Amazon SQS) is a messaging queue service that handles message or workflows between other components in a system.

Amazon SQS supports an unlimited number of queues and unlimited number of messages per queue for each user. Please be aware that Amazon SQS automatically deletes messages that have been in the queue for more than 4 days.

Reference: <http://aws.amazon.com/documentation/sqs/>

NEW QUESTION 60

You have been doing a lot of testing of your VPC Network by deliberately failing EC2 instances to test whether instances are failing over properly. Your customer who will be paying the AWS bill for all this asks you if he being charged for all these instances. You try to explain to him how the billing works on EC2 instances to the best of your knowledge. What would be an appropriate response to give to the customer in regards to this?

- A. Billing commences when Amazon EC2 AM instance is completely up and billing ends as soon as the instance starts to shutdown.
- B. Billing only commences only after 1 hour of uptime and billing ends when the instance terminates.
- C. Billing commences when Amazon EC2 initiates the boot sequence of an AM instance and billing ends when the instance shuts down.
- D. Billing commences when Amazon EC2 initiates the boot sequence of an AM instance and billing ends as soon as the instance starts to shutdown.

Answer: C

Explanation: Billing commences when Amazon EC2 initiates the boot sequence of an AM instance. Billing ends when the instance shuts down, which could occur through a web services command, by running "shutdown -h", or through instance failure.

Reference: <http://aws.amazon.com/ec2/faqs/#Billing>

NEW QUESTION 61

You log in to IAM on your AWS console and notice the following message. "Delete your root access keys." Why do you think IAM is requesting this?

- A. Because the root access keys will expire as soon as you log out.
- B. Because the root access keys expire after 1 week.
- C. Because the root access keys are the same for all users.
- D. Because they provide unrestricted access to your AWS resource

Answer: D

Explanation: In AWS an access key is required in order to sign requests that you make using the command-line interface (CLI), using the AWS SDKs, or using direct API calls. Anyone who has the access key for your root account has unrestricted access to all the resources in your account, including billing information. One of the best ways to protect your account is to not have an access key for your root account. We recommend that unless you must have a root access key (this is very rare), that you do not generate one. Instead, AWS best practice is to create one or more AWS Identity and Access Management (IAM) users, give them the necessary permissions, and use IAM users for everyday interaction with AWS.

Reference:

<http://docs.aws.amazon.com/general/latest/gr/aws-access-keys-best-practices.html#root-password>

NEW QUESTION 66

Your company has been storing a lot of data in Amazon Glacier and has asked for an inventory of what is in there exactly. So you have decided that you need to download a vault inventory. Which of the following statements is incorrect in relation to Vault Operations in Amazon Glacier?

- A. You can use Amazon Simple Notification Service (Amazon SNS) notifications to notify you when the job completes.
- B. A vault inventory refers to the list of archives in a vault.
- C. You can use Amazon Simple Queue Service (Amazon SQS) notifications to notify you when the job completes.
- D. Downloading a vault inventory is an asynchronous operatio

Answer: C

Explanation: Amazon Glacier supports various vault operations.

A vault inventory refers to the list of archives in a vault. For each archive in the list, the inventory provides archive information such as archive ID, creation date, and size. Amazon Glacier updates the vault inventory approximately once a day, starting on the day the first archive is uploaded to the vault. A vault inventory must exist for you to be able to download it.

Downloading a vault inventory is an asynchronous operation. You must first initiate a job to download the inventory. After receiving the job request, Amazon Glacier prepares your inventory for download. After the job completes, you can download the inventory data.

Given the asynchronous nature of the job, you can use Amazon Simple Notification Service (Amazon SNS) notifications to notify you when the job completes. You can specify an Amazon SNS topic for each individual job request or configure your vault to send a notification when specific vault events occur. Amazon Glacier prepares an inventory for each vault periodically, every 24 hours. If there have been no archive additions or deletions to the vault since the last inventory, the inventory date is not updated. When you initiate a job for a vault inventory, Amazon Glacier returns the last inventory it generated, which is a point-in-time snapshot

and not real-time data. You might not find it useful to retrieve vault inventory for each archive upload. However, suppose you maintain a database on the client-side associating metadata about the archives you upload to Amazon Glacier. Then, you might find the vault inventory useful to reconcile information in your database with the actual vault inventory.

Reference: <http://docs.aws.amazon.com/amazonglacier/latest/dev/working-with-vaults.html>

NEW QUESTION 67

A customer enquires about whether all his data is secure on AWS and is especially concerned about Elastic Map Reduce (EMR) so you need to inform him of some of the security features in place for AWS. Which of the below statements would be an incorrect response to your customers enquiry?

- A. Amazon ENIR customers can choose to send data to Amazon S3 using the HTTPS protocol for secure transmission.
- B. Amazon S3 provides authentication mechanisms to ensure that stored data is secured against unauthorized access.
- C. Every packet sent in the AWS network uses Internet Protocol Security (IPsec).
- D. Customers may encrypt the input data before they upload it to Amazon S3.

Answer: C

Explanation: Amazon S3 provides authentication mechanisms to ensure that stored data is secured against unauthorized access. Unless the customer who is uploading the data specifies otherwise, only that customer can access the data. Amazon EMR customers can also choose to send data to Amazon S3 using the HTTPS protocol for secure transmission. In addition, Amazon EMR always uses HTTPS to send data between Amazon S3 and Amazon EC2. For added security, customers may encrypt the input data before they upload it to Amazon S3 (using any common data compression tool); they then need to add a decryption step to the beginning of their cluster when Amazon EMR fetches the data from Amazon S3. Reference: <https://aws.amazon.com/elasticmapreduce/faqs/>

NEW QUESTION 69

You are in the process of building an online gaming site for a client and one of the requirements is that it must be able to process vast amounts of data easily. Which AWS Service would be very helpful in processing all this data?

- A. Amazon S3
- B. AWS Data Pipeline
- C. AWS Direct Connect
- D. Amazon EMR

Answer: D

Explanation: Managing and analyzing high data volumes produced by online games platforms can be difficult. The back-end infrastructures of online games can be challenging to maintain and operate. Peak usage periods, multiple players, and high volumes of write operations are some of the most common problems that operations teams face.

Amazon Elastic MapReduce (Amazon EMR) is a service that processes vast amounts of data easily. Input data can be retrieved from web server logs stored on Amazon S3 or from player data stored in Amazon DynamoDB tables to run analytics on player behavior, usage patterns, etc. Those results can be stored again on Amazon S3, or inserted in a relational database for further analysis with classic business intelligence tools.

Reference: http://media.amazonwebservices.com/architecturecenter/AWS_ac_ra_games_10.pdf

NEW QUESTION 71

You need to change some settings on Amazon Relational Database Service but you do not want the database to reboot immediately which you know might happen depending on the setting that you change. Which of the following will cause an immediate DB instance reboot to occur?

- A. You change storage type from standard to PIOPS, and Apply Immediately is set to true.
- B. You change the DB instance class, and Apply Immediately is set to false.
- C. You change a static parameter in a DB parameter group.
- D. You change the backup retention period for a DB instance from 0 to a nonzero value or from a nonzero value to 0, and Apply Immediately is set to false.

Answer: A

Explanation: A DB instance outage can occur when a DB instance is rebooted, when the DB instance is put into a state that prevents access to it, and when the database is restarted. A reboot can occur when you manually reboot your DB instance or when you change a DB instance setting that requires a reboot before it can take effect.

A DB instance reboot occurs immediately when one of the following occurs:

You change the backup retention period for a DB instance from 0 to a nonzero value or from a nonzero value to 0 and set Apply Immediately to true.

You change the DB instance class, and Apply Immediately is set to true.

You change storage type from standard to PIOPS, and Apply Immediately is set to true.

A DB instance reboot occurs during the maintenance window when one of the following occurs:

You change the backup retention period for a DB instance from 0 to a nonzero value or from a nonzero value to 0, and Apply Immediately is set to false.

You change the DB instance class, and Apply Immediately is set to false. Reference:

http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/CHAP_Troubleshooting.html#CHAP_Troubleshooting.Security

NEW QUESTION 75

What does the following policy for Amazon EC2 do?

```
{
  "Statement": [{
    "Effect": "Allow", "Action": "ec2:Describe*", "Resource": "*"
  }]
}
```

- A. Allow users to use actions that start with "Describe" over all the EC2 resources.
- B. Share an AMI with a partner
- C. Share an AMI within the account

D. Allow a group to only be able to describe, run, stop, start, and terminate instances

Answer: A

Explanation: You can use IAM policies to control the actions that your users can perform against your EC2 resources. For instance, a policy with the following statement will allow users to perform actions whose name start with "Describe" against all your EC2 resources.

```
{
  "Statement": [{
    "Effect": "Allow", "Action": "ec2:Describe*", "Resource": "*"
  }]
}
```

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/UsingIAM.html>

NEW QUESTION 77

You are setting up a very complex financial services grid and so far it has 5 Elastic IP (EIP) addresses.

You go to assign another EIP address, but all accounts are limited to 5 Elastic IP addresses per region by default, so you aren't able to. What is the reason for this?

- A. For security reasons.
- B. Hardware restrictions.
- C. Public (IPv4) internet addresses are a scarce resource.
- D. There are only 5 network interfaces per instance

Answer: C

Explanation: Public (IPv4) internet addresses are a scarce resource. There is only a limited amount of public IP space available, and Amazon EC2 is committed to helping use that space efficiently.

By default, all accounts are limited to 5 Elastic IP addresses per region. If you need more than 5 Elastic IP addresses, AWS asks that you apply for your limit to be raised. They will ask you to think through your use case and help them understand your need for additional addresses.

Reference: http://aws.amazon.com/ec2/faqs/#How_many_instances_can_I_run_in_Amazon_EC2

NEW QUESTION 79

A major customer has asked you to set up his AWS infrastructure so that it will be easy to recover in the case of a disaster of some sort. Which of the following is important when thinking about being able to quickly launch resources in AWS to ensure business continuity in case of a disaster?

- A. Create and maintain AMIs of key servers where fast recovery is required.
- B. Regularly run your servers, test them, and apply any software updates and configuration changes.
- C. All items listed here are important when thinking about disaster recovery.
- D. Ensure that you have all supporting custom software packages available in AWS

Answer: C

Explanation: In the event of a disaster to your AWS infrastructure you should be able to quickly launch resources in Amazon Web Services (AWS) to ensure business continuity.

The following are some key steps you should have in place for preparation:

1. Set up Amazon EC2 instances to replicate or mirror data.
2. Ensure that you have all supporting custom software packages available in AWS.
3. Create and maintain AMIs of key servers where fast recovery is required.
4. Regularly run these servers, test them, and apply any software updates and configuration changes.
5. Consider automating the provisioning of AWS resources.

Reference: http://d36cz9buwru1tt.cloudfront.net/AWS_Disaster_Recovery.pdf

NEW QUESTION 84

What does Amazon DynamoDB provide?

- A. A predictable and scalable MySQL database
- B. A fast and reliable PL/SQL database cluster
- C. A standalone Cassandra database, managed by Amazon Web Services
- D. A fast, highly scalable managed NoSQL database service

Answer: D

Explanation: Amazon DynamoDB is a managed NoSQL database service offered by Amazon. It automatically manages tasks like scalability for you while it provides high availability and durability for your data, allowing you to concentrate in other aspects of your application.

Reference: check link - https://aws.amazon.com/running_databases/

NEW QUESTION 85

You want to use AWS Import/Export to send data from your S3 bucket to several of your branch offices. What should you do if you want to send 10 storage units to AWS?

- A. Make sure your disks are encrypted prior to shipping.
- B. Make sure you format your disks prior to shipping.
- C. Make sure your disks are 1TB or more.
- D. Make sure you submit a separate job request for each device

Answer: D

Explanation: When using Amazon Import/Export, a separate job request needs to be submitted for each physical device even if they belong to the same import or export job.

Reference: <http://docs.aws.amazon.com/AWSImportExport/latest/DG/Concepts.html>

NEW QUESTION 87

You need to measure the performance of your EBS volumes as they seem to be under performing. You have come up with a measurement of 1,024 KB I/O but your colleague tells you that EBS volume performance is measured in IOPS. How many IOPS is equal to 1,024 KB I/O?

- A. 16
- B. 256
- C. 8
- D. 4

Answer: D

Explanation: Several factors can affect the performance of Amazon EBS volumes, such as instance configuration, I/O characteristics, workload demand, and storage configuration.

IOPS are input/output operations per second. Amazon EBS measures each I/O operation per second

(that is 256 KB or smaller) as one IOPS. I/O operations that are larger than 256 KB are counted in 256 KB capacity units.

For example, a 1,024 KB I/O operation would count as 4 IOPS.

When you provision a 4,000 IOPS volume and attach it to an EBS-optimized instance that can provide the necessary bandwidth, you can transfer up to 4,000 chunks of data per second (provided that the I/O does not exceed the 128 MB/s per volume throughput limit of General Purpose (SSD) and Provisioned IOPS (SSD) volumes).

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/EBSPerformance.html>

NEW QUESTION 88

AWS CloudFormation is a service that helps you model and set up your Amazon Web Services resources so that you can spend less time managing those resources and more time focusing on your applications that run in AWS. You create a template that describes all the AWS resources that you want (like Amazon EC2 instances or Amazon RDS DB instances), and AWS CloudFormation takes care of provisioning and configuring those resources for you. What formatting is required for this template?

- A. JSON-formatted document
- B. CSS-formatted document
- C. XML-formatted document
- D. HTML-formatted document

Answer: A

Explanation: You can write an AWS CloudFormation template (a JSON-formatted document) in a text editor or pick an existing template. The template describes the resources you want and their settings. For example,

suppose you want to create an Amazon EC2. Your template can declare an instance Amazon EC2 and describe its properties, as shown in the following example:

```
{
  "AWSTemplateFormatVersion" : "2010-09-09",
  "Description" : "A simple Amazon EC2 instance", "Resources" : {
    "MyEC2Instance" : {
      "Type" : "AWS::EC2::Instance", "Properties" : {
        "ImageId" : "ami-2f726546", "InstanceType" : "t1.micro"
      }
    }
  }
}
```

Reference:

<http://docs.aws.amazon.com/AWSCloudFormation/latest/UserGuide/cfn-what-is-how-does-it-work.html>

NEW QUESTION 90

You decide that you need to create a number of Auto Scaling groups to try and save some money as you have noticed that at certain times most of your EC2 instances are not being used. By default, what is the maximum number of Auto Scaling groups that AWS will allow you to create?

- A. 12
- B. Unlimited
- C. 20
- D. 2

Answer: C

Explanation: Auto Scaling is an AWS service that allows you to increase or decrease the number of EC2 instances within your application's architecture. With Auto Scaling, you create collections of EC2 instances, called Auto Scaling groups. You can create these groups from scratch, or from existing EC2 instances that are already in production.

Reference: http://docs.aws.amazon.com/general/latest/gr/aws_service_limits.html#limits_autoscaling

NEW QUESTION 95

You are setting up your first Amazon Virtual Private Cloud (Amazon VPC) so you decide to use the VPC wizard in the AWS console to help make it easier for you. Which of the following statements is correct regarding instances that you launch into a default subnet via the VPC wizard?

- A. Instances that you launch into a default subnet receive a public IP address and 10 private IP addresses.
- B. Instances that you launch into a default subnet receive both a public IP address and a private IP address.
- C. Instances that you launch into a default subnet don't receive any IP addresses and you need to define them manually.
- D. Instances that you launch into a default subnet receive a public IP address and 5 private IP addresses.

Answer: B

Explanation: Instances that you launch into a default subnet receive both a public IP address and a private IP address. Instances in a default subnet also receive both public and private DNS hostnames. Instances that you launch into a nondefault subnet in a default VPC don't receive a public IP address or a DNS hostname. You can change your subnet's default public IP addressing behavior.

Reference: <http://docs.aws.amazon.com/AmazonVPC/latest/UserGuide/default-vpc.html>

NEW QUESTION 100

A user has configured ELB with two EBS backed EC2 instances. The user is trying to understand the DNS access and IP support for ELB. Which of the below mentioned statements may not help the user understand the IP mechanism supported by ELB?

- A. The client can connect over IPv4 or IPv6 using Dualstack
- B. Communication between the load balancer and back-end instances is always through IPv4
- C. ELB DNS supports both IPv4 and IPv6
- D. The ELB supports either IPv4 or IPv6 but not both

Answer: D

Explanation: Elastic Load Balancing supports both Internet Protocol version 6 (IPv6) and Internet Protocol version 4 (IPv4). Clients can connect to the user's load balancer using either IPv4 or IPv6 (in EC2-Classic) DNS. However, communication between the load balancer and its back-end instances uses only IPv4. The user can use the Dualstack-prefixed DNS name to enable IPv6 support for communications between the client and the load balancers. Thus, the clients are able to access the load balancer using either IPv4 or IPv6 as their individual connectivity needs dictate.

Reference: <http://docs.aws.amazon.com/ElasticLoadBalancing/latest/DeveloperGuide/UserScenariosForEC2.html>

NEW QUESTION 105

Amazon S3 allows you to set per-file permissions to grant read and/or write access. However you have decided that you want an entire bucket with 100 files already in it to be accessible to the public. You don't want to go through 100 files individually and set permissions. What would be the best way to do this?

- A. Move the bucket to a new region
- B. Add a bucket policy to the bucket.
- C. Move the files to a new bucket.
- D. Use Amazon EBS instead of S3

Answer: B

Explanation: Amazon S3 supports several mechanisms that give you flexibility to control who can access your data as well as how, when, and where they can access it. Amazon S3 provides four different access control mechanisms: AWS Identity and Access Management (IAM) policies, Access Control Lists (ACLs), bucket policies, and query string authentication. IAM enables organizations to create and manage multiple users under a single AWS account. With IAM policies, you can grant IAM users fine-grained control to your Amazon S3 bucket or objects. You can use ACLs to selectively add (grant) certain permissions on individual objects.

Amazon S3 bucket policies can be used to add or deny permissions across some or all of the objects within a single bucket.

With Query string authentication, you have the ability to share Amazon S3 objects through URLs that are valid for a specified period of time.

Reference: <http://aws.amazon.com/s3/details/#security>

NEW QUESTION 109

A user has created an application which will be hosted on EC2. The application makes calls to DynamoDB to fetch certain data. The application is using the DynamoDB SDK to connect with from the EC2 instance. Which of the below mentioned statements is true with respect to the best practice for security in this scenario?

- A. The user should create an IAM user with DynamoDB access and use its credentials within the application to connect with DynamoDB
- B. The user should attach an IAM role with DynamoDB access to the EC2 instance
- C. The user should create an IAM role, which has EC2 access so that it will allow deploying the application
- D. The user should create an IAM user with DynamoDB and EC2 access
- E. Attach the user with the application so that it does not use the root account credentials

Answer: B

Explanation: With AWS IAM a user is creating an application which runs on an EC2 instance and makes requests to AWS, such as DynamoDB or S3 calls. Here it is recommended that the user should not create an IAM user and pass the user's credentials to the application or embed those credentials inside the application. Instead, the user should use roles for EC2 and give that role access to DynamoDB / S3. When the roles are attached to EC2, it will give temporary security credentials to the application hosted on that EC2, to connect with DynamoDB / S3.

Reference: http://docs.aws.amazon.com/IAM/latest/UserGuide/Using_WorkingWithGroupsAndUsers.html

NEW QUESTION 114

A user has created photo editing software and hosted it on EC2. The software accepts requests from the user about the photo format and resolution and sends a message to S3 to enhance the picture accordingly. Which of the below mentioned AWS services will help make a scalable software with the AWS infrastructure in this scenario?

- A. AWS Simple Notification Service

- B. AWS Simple Queue Service
- C. AWS Elastic Transcoder
- D. AWS Glacier

Answer: B

Explanation: Amazon Simple Queue Service (SQS) is a fast, reliable, scalable, and fully managed message queuing service. SQS provides a simple and cost-effective way to decouple the components of an application. The user can configure SQS, which will decouple the call between the EC2 application and S3. Thus, the application does not keep waiting for S3 to provide the data.

Reference: <http://aws.amazon.com/sqs/faqs/>

NEW QUESTION 116

A user has launched one EC2 instance in the US East region and one in the US West region. The user has launched an RDS instance in the US East region. How can the user configure access from both the EC2 instances to RDS?

- A. It is not possible to access RDS of the US East region from the US West region
- B. Configure the US West region's security group to allow a request from the US East region's instance and configure the RDS security group's ingress rule for the US East EC2 group
- C. Configure the security group of the US East region to allow traffic from the US West region's instance and configure the RDS security group's ingress rule for the US East EC2 group
- D. Configure the security group of both instances in the ingress rule of the RDS security group

Answer: C

Explanation: The user cannot authorize an Amazon EC2 security group if it is in a different AWS Region than the RDS DB instance. The user can authorize an IP range or specify an Amazon EC2 security group in the same region that refers to an IP address in another region. In this case allow IP of US West inside US East's security group and open the RDS security group for US East region.

Reference: http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/USER_WorkingWithSecurityGroups.html

NEW QUESTION 119

An organization has a statutory requirement to protect the data at rest for data stored in EBS volumes. Which of the below mentioned options can the organization use to achieve data protection?

- A. Data replication.
- B. Data encryption.
- C. Data snapshot.
- D. All the options listed here

Answer: D

Explanation: For protecting the Amazon EBS data at REST, the user can use options, such as Data Encryption (Windows / Linux / third party based), Data Replication (AWS internally replicates data for redundancy), and Data Snapshot (for point in time backup).

Reference: http://media.amazonwebservices.com/AWS_Security_Best_Practices.pdf

NEW QUESTION 123

You have a number of image files to encode. In an Amazon SQS worker queue, you create an Amazon SQS message for each file specifying the command (jpeg-encode) and the location of the file in Amazon S3. Which of the following statements best describes the functionality of Amazon SQS?

- A. Amazon SQS is a distributed queuing system that is optimized for horizontal scalability, not for single-threaded sending or receive speeds.
- B. Amazon SQS is for single-threaded sending or receive speeds.
- C. Amazon SQS is a non-distributed queuing system.
- D. Amazon SQS is a distributed queuing system that is optimized for vertical scalability and for single-threaded sending or receive speeds.

Answer: A

Explanation: Amazon SQS is a distributed queuing system that is optimized for horizontal scalability, not for single-threaded sending or receive speeds. A single client can send or receive Amazon SQS messages at a rate of about 5 to 50 messages per second. Higher receive performance can be achieved by requesting multiple messages (up to 10) in a single call. It may take several seconds before a message that has been to a queue is available to be received.

Reference: http://media.amazonwebservices.com/AWS_Storage_Options.pdf

NEW QUESTION 126

A user is observing the EC2 CPU utilization metric on CloudWatch. The user has observed some interesting patterns while filtering over the 1 week period for a particular hour. The user wants to zoom that data point to a more granular period. How can the user do that easily with CloudWatch?

- A. The user can zoom a particular period by selecting that period with the mouse and then releasing the mouse
- B. The user can zoom a particular period by specifying the aggregation data for that period
- C. The user can zoom a particular period by double clicking on that period with the mouse
- D. The user can zoom a particular period by specifying the period in the Time Range

Answer: A

Explanation: Amazon CloudWatch provides the functionality to graph the metric data generated either by the AWS services or the custom metric to make it easier

for the user to analyse. The AWS CloudWatch console provides the option to change the granularity of a graph and zoom in to see data over a shorter time period. To zoom, the user has to click in the graph details pane, drag on the graph area for selection, and then release the mouse button.
Reference: http://docs.aws.amazon.com/AmazonCloudWatch/latest/DeveloperGuide/zoom_in_on_graph.html

NEW QUESTION 131

A scope has been handed to you to set up a super fast gaming server and you decide that you will use Amazon DynamoDB as your database. For efficient access to data in a table, Amazon DynamoDB creates and maintains indexes for the primary key attributes. A secondary index is a data structure that contains a subset of attributes from a table, along with an alternate key to support Query operations. How many types of secondary indexes does DynamoDB support?

- A. 2
- B. 16
- C. 4
- D. As many as you need

Answer: A

Explanation: DynamoDB supports two types of secondary indexes:

Local secondary index — an index that has the same hash key as the table, but a different range key. A local secondary index is "local" in the sense that every partition of a local secondary index is scoped to a table partition that has the same hash key.

Global secondary index — an index with a hash and range key that can be different from those on the table. A global secondary index is considered "global" because queries on the index can span all of the data in a table, across all partitions.

Reference: <http://docs.aws.amazon.com/amazondynamodb/latest/developerguide/SecondaryIndexes.html>

NEW QUESTION 136

Select the correct statement: Within Amazon EC2, when using Linux instances, the device name /dev/sda1 is .

- A. reserved for EBS volumes
- B. recommended for EBS volumes
- C. recommended for instance store volumes
- D. reserved for the root device

Answer: D

Explanation: Within Amazon EC2, when using a Linux instance, the device name /dev/sda1 is reserved for the root device.

Reference: http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/device_naming.html

NEW QUESTION 138

The common use cases for DynamoDB Fine-Grained Access Control (FGAC) are cases in which the end user wants .

- A. to change the hash keys of the table directly
- B. to check if an IAM policy requires the hash keys of the tables directly
- C. to read or modify any codecommit key of the table directly, without a middle-tier service
- D. to read or modify the table directly, without a middle-tier service

Answer: D

Explanation: FGAC can benefit any application that tracks information in a DynamoDB table, where the end user (or application client acting on behalf of an end user) wants to read or modify the table directly, without a middle-tier service. For instance, a developer of a mobile app named Acme can use FGAC to track the top score of every Acme user in a DynamoDB table. FGAC allows the application client to modify only the top score for the user that is currently running the application.

Reference: http://aws.amazon.com/dynamodb/faqs/#security_anchor

NEW QUESTION 140

A user comes to you and wants access to Amazon CloudWatch but only wants to monitor a specific LoadBalancer. Is it possible to give him access to a specific set of instances or a specific LoadBalancer?

- A. No because you can't use IAM to control access to CloudWatch data for specific resources.
- B. Yes
- C. You can use IAM to control access to CloudWatch data for specific resources.
- D. No because you need to be Sysadmin to access CloudWatch data.
- E. Yes
- F. Any user can see all CloudWatch data and needs no access right

Answer: A

Explanation: Amazon CloudWatch integrates with AWS Identity and Access Management (IAM) so that you can

specify which CloudWatch actions a user in your AWS Account can perform. For example, you could create an IAM policy that gives only certain users in your organization permission to use GetMetricStatistics. They could then use the action to retrieve data about your cloud resources.

You can't use IAM to control access to CloudWatch data for specific resources. For example, you can't give a user access to CloudWatch data for only a specific set of instances or a specific LoadBalancer. Permissions granted using IAM cover all the cloud resources you use with CloudWatch. In addition, you can't use IAM roles with the Amazon CloudWatch command line tools.

Using Amazon CloudWatch with IAM doesn't change how you use CloudWatch. There are no changes to CloudWatch actions, and no new CloudWatch actions related to users and access control.

Reference: <http://docs.aws.amazon.com/AmazonCloudWatch/latest/DeveloperGuide/UsingIAM.html>

NEW QUESTION 144

A user is planning to make a mobile game which can be played online or offline and will be hosted on EC2.

The user wants to ensure that if someone breaks the highest score or they achieve some milestone they can inform all their colleagues through email. Which of the below mentioned AWS services helps achieve this goal?

- A. AWS Simple Workflow Service.
- B. AWS Simple Email Service.
- C. Amazon Cognito
- D. AWS Simple Queue Service

Answer: B

Explanation: Amazon Simple Email Service (Amazon SES) is a highly scalable and cost-effective email-sending service for businesses and developers. It integrates with other AWS services, making it easy to send emails from applications that are hosted on AWS.

Reference: <http://aws.amazon.com/ses/faqs/>

NEW QUESTION 149

You need to create an Amazon Machine Image (AMI) for a customer for an application which does not appear to be part of the standard AWS AMI template that you can see in the AWS console. What are the alternative possibilities for creating an AMI on AWS?

- A. You can purchase an AMIs from a third party but cannot create your own AMI.
- B. You can purchase an AMIs from a third party or can create your own AMI.
- C. Only AWS can create AMIs and you need to wait till it becomes available.
- D. Only AWS can create AMIs and you need to request them to create one for you

Answer: B

Explanation: You can purchase an AMIs from a third party, including AMIs that come with service contracts from organizations such as Red Hat. You can also create an AMI and sell it to other Amazon EC2 users. After you create an AMI, you can keep it private so that only you can use it, or you can share it with a specified list of AWS accounts. You can also make your custom AMI public so that the community can use it. Building a safe, secure, usable AMI for public consumption is a fairly straightforward process, if you follow a few simple guidelines.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/AMIs.html>

NEW QUESTION 153

While creating an Amazon RDS DB, your first task is to set up a DB that controls which IP address or EC2 instance can access your DB Instance.

- A. security token pool
- B. security token
- C. security pool
- D. security group

Answer: D

Explanation: While creating an Amazon RDS DB, your first task is to set up a DB Security Group that controls what IP addresses or EC2 instances have access to your DB Instance.

Reference: http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/USER_WorkingWithSecurityGroups.html

NEW QUESTION 157

You are very concerned about security on your network because you have multiple programmers testing APIs and SDKs and you have no idea what is happening. You think CloudTrail may help but are not sure what it does. Which of the following statements best describes the AWS service CloudTrail?

- A. With AWS CloudTrail you can get a history of AWS API calls and related events for your account.
- B. With AWS CloudTrail you can get a history of IAM users for your account.
- C. With AWS CloudTrail you can get a history of S3 logfiles for your account.
- D. With AWS CloudTrail you can get a history of CloudFormation JSON scripts used for your account

Answer: A

Explanation: With AWS CloudTrail, you can get a history of AWS API calls for your account, including API calls made via the AWS Management Console, the AWS SDKs, the command line tools, and higher-level AWS services. You can also identify which users and accounts called AWS APIs for services that support CloudTrail, the source IP address the calls were made from, and when the calls occurred.

You can identify which users and accounts called AWS for services that support CloudTrail, the source IP address the calls were made from, and when the calls occurred. You can integrate CloudTrail into applications using the API, automate trail creation for your organization, check the status of your trails, and control how administrators turn CloudTrail logging on and off.

Reference: http://docs.aws.amazon.com/awscloudtrail/latest/userguide/what_is_cloud_trail_top_level.html

NEW QUESTION 158

After setting up an EC2 security group with a cluster of 20 EC2 instances, you find an error in the security group settings. You quickly make changes to the security group settings. When will the changes to the settings be effective?

- A. The settings will be effective immediately for all the instances in the security group.
- B. The settings will be effective only when all the instances are restarted.

- C. The settings will be effective for all the instances only after 30 minutes.
- D. The settings will be effective only for the new instances added to the security group

Answer: A

Explanation: Amazon Redshift applies changes to a cluster security group immediately. So if you have associated the cluster security group with a cluster, inbound cluster access rules in the updated cluster security group apply immediately.

Reference: <http://docs.aws.amazon.com/redshift/latest/mgmt/working-with-security-groups.html>

NEW QUESTION 159

You have a lot of data stored in the AWS Storage Gateway and your manager has come to you asking about how the billing is calculated, specifically the Virtual Tape Shelf usage. What would be a correct response to this?

- A. You are billed for the virtual tape data you store in Amazon Glacier and are billed for the size of the virtual tape.
- B. You are billed for the virtual tape data you store in Amazon Glacier and billed for the portion of virtual tape capacity that you use, not for the size of the virtual tape.
- C. You are billed for the virtual tape data you store in Amazon S3 and billed for the portion of virtual tape capacity that you use, not for the size of the virtual tape.
- D. You are billed for the virtual tape data you store in Amazon S3 and are billed for the size of the virtual tape.

Answer: B

Explanation: The AWS Storage Gateway is a service connecting an on-premises software appliance with cloud-based storage to provide seamless and secure integration between an organization's on-premises IT environment and AWS's storage infrastructure.

AWS Storage Gateway billing is as follows. Volume storage usage (per GB per month):

You are billed for the Cached volume data you store in Amazon S3. You are only billed for volume capacity you use, not for the size of the volume you create.

Snapshot Storage usage (per GB per month): You are billed for the snapshots your gateway stores in Amazon S3. These snapshots are stored and billed as Amazon EBS snapshots. Snapshots are incremental backups, reducing your storage charges. When taking a new snapshot, only the data that has changed since your last snapshot is stored.

Virtual Tape Library usage (per GB per month):

You are billed for the virtual tape data you store in Amazon S3. You are only billed for the portion of virtual tape capacity that you use, not for the size of the virtual tape.

Virtual Tape Shelf usage (per GB per month):

You are billed for the virtual tape data you store in Amazon Glacier. You are only billed for the portion of virtual tape capacity that you use, not for the size of the virtual tape.

Reference: <https://aws.amazon.com/storagegateway/faqs/>

NEW QUESTION 163

You are configuring a new VPC for one of your clients for a cloud migration project, and only a public VPN will be in place. After you created your VPC, you created a new subnet, a new internet gateway, and attached your internet gateway to your VPC. When you launched your first instance into your VPC, you realized that you aren't able to connect to the instance, even if it is configured with an elastic IP. What should be done to access the instance?

- A. A route should be created as 0.0.0.0/0 and your internet gateway as target.
- B. Attach another ENI to the instance and connect via new ENI.
- C. A NAT instance should be created and all traffic should be forwarded to NAT instance.
- D. A NACL should be created that allows all outbound traffic

Answer: A

Explanation: All traffic should be routed via Internet Gateway. So, a route should be created with 0.0.0.0/0 as a source, and your Internet Gateway as your target.

Reference: http://docs.aws.amazon.com/AmazonVPC/latest/UserGuide/VPC_Scenario1.html

NEW QUESTION 168

A user is currently building a website which will require a large number of instances in six months, when a demonstration of the new site will be given upon launch. Which of the below mentioned options allows the user to procure the resources beforehand so that they need not worry about infrastructure availability during the demonstration?

- A. Procure all the instances as reserved instances beforehand.
- B. Launch all the instances as part of the cluster group to ensure resource availability.
- C. Pre-warm all the instances one month prior to ensure resource availability.
- D. Ask AWS now to procure the dedicated instances in 6 month

Answer: A

Explanation: Amazon Web Services has massive hardware resources at its data centers, but they are finite. The best way for users to maximize their access to these resources is by reserving a portion of the computing capacity that they require. This can be done through reserved instances. With reserved instances, the user literally reserves the computing capacity in the Amazon Web Services cloud.

Reference: http://media.amazonwebservices.com/AWS_Building_Fault_Tolerant_Applications.pdf

NEW QUESTION 172

You are setting up some EBS volumes for a customer who has requested a setup which includes a RAID (redundant array of inexpensive disks). AWS has some recommendations for RAID setups. Which RAID setup is not recommended for Amazon EBS?

- A. RAID 5 only
- B. RAID 5 and RAID 6
- C. RAID 1 only

D. RAID 1 and RAID 6

Answer: B

Explanation: With Amazon EBS, you can use any of the standard RAID configurations that you can use with a traditional bare metal server, as long as that particular RAID configuration is supported by the operating system for your instance. This is because all RAID is accomplished at the software level. For greater I/O performance than you can achieve with a single volume, RAID 0 can stripe multiple volumes together; for on-instance redundancy, RAID 1 can mirror two volumes together.

RAID 5 and RAID 6 are not recommended for Amazon EBS because the parity write operations of these RAID modes consume some of the IOPS available to your volumes.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/raid-config.html>

NEW QUESTION 176

What is the default maximum number of Access Keys per user?

- A. 10
- B. 15
- C. 2
- D. 20

Answer: C

Explanation: The default maximum number of Access Keys per user is 2.

Reference: <http://docs.aws.amazon.com/IAM/latest/UserGuide/LimitationsOnEntities.html>

NEW QUESTION 177

What is the network performance offered by the c4.8xlarge instance in Amazon EC2?

- A. 20 Gigabit
- B. 10 Gigabit
- C. Very High but variable
- D. 5 Gigabit

Answer: B

Explanation: Networking performance offered by the c4.8xlarge instance is 10 Gigabit. Reference: <http://aws.amazon.com/ec2/instance-types/>

NEW QUESTION 180

You need to create a JSON-formatted text file for AWS CloudFormation. This is your first template and the only thing you know is that the templates include several major sections but there is only one that is required for it to work. What is the only section required?

- A. Mappings
- B. Outputs
- C. Resources
- D. Conditions

Answer: C

Explanation: AWS CloudFormation is a service that helps you model and set up your Amazon Web Services resources so that you can spend less time managing those resources and more time focusing on your applications that run in AWS. You create a template that describes all the AWS resources that you want (like Amazon EC2 instances or Amazon RDS DB instances), and AWS CloudFormation takes care of provisioning and configuring those resources for you.

A template is a JSON-formatted text file that describes your AWS infrastructure. Templates include several major sections.

The Resources section is the only section that is required.

The first character in the template must be an open brace ({), and the last character must be a closed brace (}). The following template fragment shows the template structure and sections.

Reference: <http://docs.aws.amazon.com/AWSCloudFormation/latest/UserGuide/template-anatomy.html>

NEW QUESTION 184

A user is hosting a website in the US West-1 region. The website has the highest client base from the Asia-Pacific (Singapore / Japan) region. The application is accessing data from S3 before serving it to client. Which of the below mentioned regions gives a better performance for S3 objects?

- A. Japan
- B. Singapore
- C. US East
- D. US West-1

Answer: D

Explanation: Access to Amazon S3 from within Amazon EC2 in the same region is fast. In this aspect, though the client base is Singapore, the application is being hosted in the US West-1 region. Thus, it is recommended that S3 objects be stored in the US-West-1 region.

Reference: http://media.amazonwebservices.com/AWS_Storage_Options.pdf

NEW QUESTION 187

Which of the following statements is true of tagging an Amazon EC2 resource?

- A. You don't need to specify the resource identifier while terminating a resource.
- B. You can terminate, stop, or delete a resource based solely on its tags.
- C. You can't terminate, stop, or delete a resource based solely on its tags.
- D. You don't need to specify the resource identifier while stopping a resource.

Answer: C

Explanation: You can assign tags only to resources that already exist. You can't terminate, stop, or delete a resource based solely on its tags; you must specify the resource identifier.

Reference: http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/Using_Tags.html

NEW QUESTION 189

A user has created a CloudFormation stack. The stack creates AWS services, such as EC2 instances, ELB, AutoScaling, and RDS. While creating the stack it created EC2, ELB and AutoScaling but failed to create RDS. What will CloudFormation do in this scenario?

- A. Rollback all the changes and terminate all the created services
- B. It will wait for the user's input about the error and correct the mistake after the input
- C. CloudFormation can never throw an error after launching a few services since it verifies all the steps before launching
- D. It will warn the user about the error and ask the user to manually create RDS

Answer: A

Explanation: AWS CloudFormation is an application management tool which provides application modeling, deployment, configuration, management and related activities. The AWS CloudFormation stack is a collection of AWS resources which are created and managed as a single unit when AWS CloudFormation instantiates a template. If any of the services fails to launch, CloudFormation will rollback all the changes and terminate or delete all the created services.

Reference: <http://aws.amazon.com/cloudformation/faqs/>

NEW QUESTION 194

In Amazon EC2, what is the limit of Reserved Instances per Availability Zone each month?

- A. 5
- B. 20
- C. 50
- D. 10

Answer: B

Explanation: There are 20 Reserved Instances per Availability Zone in each month.

Reference: http://docs.aws.amazon.com/general/latest/gr/aws_service_limits.html

NEW QUESTION 198

Is it possible to get a history of all EC2 API calls made on your account for security analysis and operational troubleshooting purposes?

- A. Yes, by default, the history of your API calls is logged.
- B. Yes, you should turn on the CloudTrail in the AWS console.
- C. No, you can only get a history of VPC API calls.
- D. No, you cannot store history of EC2 API calls on Amazon.

Answer: B

Explanation: To get a history of all EC2 API calls (including VPC and EBS) made on your account, you simply turn on CloudTrail in the AWS Management Console.

Reference: <https://aws.amazon.com/ec2/faqs/>

NEW QUESTION 203

After setting up some EC2 instances you now need to set up a monitoring solution to keep track of these instances and to send you an email when the CPU hits a certain threshold. Which statement below best describes what thresholds you can set to trigger a CloudWatch Alarm?

- A. Set a target value and choose whether the alarm will trigger when the value is greater than (>), greater than or equal to (>=), less than (<), or less than or equal to (<=) that value.
- B. Thresholds need to be set in IAM not CloudWatch
- C. Only default thresholds can be set you can't choose your own thresholds.
- D. Set a target value and choose whether the alarm will trigger when the value hits this threshold

Answer: A

Explanation: Amazon CloudWatch is a monitoring service for AWS cloud resources and the applications you run on AWS. You can use Amazon CloudWatch to collect and track metrics, collect and monitor log files, and set alarms.

When you create an alarm, you first choose the Amazon CloudWatch metric you want it to monitor. Next, you choose the evaluation period (e.g., five minutes or one hour) and a statistical value to measure (e.g., Average or Maximum).

To set a threshold, set a target value and choose whether the alarm will trigger when the value is greater than (>), greater than or equal to (>=), less than (<), or less than or equal to (<=) that value.

Reference: <http://aws.amazon.com/cloudwatch/faqs/>

NEW QUESTION 204

When does the billing of an Amazon EC2 system begin?

- A. It starts when the Status column for your distribution changes from Creating to Deployed.
- B. It starts as soon as you click the create instance option on the main EC2 console.
- C. It starts when your instance reaches 720 instance hours.
- D. It starts when Amazon EC2 initiates the boot sequence of an AM instance

Answer: D

Explanation: Billing commences when Amazon EC2 initiates the boot sequence of an AM instance. Billing ends when the instance terminates, which could occur through a web services command, by running "shutdown -h", or through instance failure. When you stop an instance, Amazon shuts it down but doesn't charge hourly usage for a stopped instance, or data transfer fees, but charges for the storage for any Amazon EBS volumes.

Reference: <http://aws.amazon.com/ec2/faqs/>

NEW QUESTION 207

You have just discovered that you can upload your objects to Amazon S3 using Multipart Upload API. You start to test it out but are unsure of the benefits that it would provide. Which of the following is not a benefit of using multipart uploads?

- A. You can begin an upload before you know the final object size.
- B. Quick recovery from any network issues.
- C. Pause and resume object uploads.
- D. It's more secure than normal upload

Answer: D

Explanation: Multipart upload in Amazon S3 allows you to upload a single object as a set of parts. Each part is a contiguous portion of the object's data. You can upload these object parts independently and in any order.

If transmission of any part fails, you can re-transmit that part without affecting other parts. After all parts of your object are uploaded, Amazon S3 assembles these parts and creates the object. In general, when

your object size reaches 100 MB, you should consider using multipart uploads instead of uploading the object in a single operation.

Using multipart upload provides the following advantages:

Improved throughput—You can upload parts in parallel to improve throughput.

Quick recovery from any network issues—Smaller part size minimizes the impact of restarting a failed upload due to a network error.

Pause and resume object uploads—You can upload object parts over time. Once you initiate a multipart upload there is no expiry; you must explicitly complete or abort the multipart upload.

Begin an upload before you know the final object size—You can upload an object as you are creating it. Reference:

<http://docs.aws.amazon.com/AmazonS3/latest/dev/uploadobjusingmpu.html>

NEW QUESTION 210

What happens to Amazon EBS root device volumes, by default, when an instance terminates?

- A. Amazon EBS root device volumes are moved to IAM.
- B. Amazon EBS root device volumes are copied into Amazon RDS.
- C. Amazon EBS root device volumes are automatically deleted.
- D. Amazon EBS root device volumes remain in the database until you delete the

Answer: C

Explanation: By default, Amazon EBS root device volumes are automatically deleted when the instance terminates. Reference:

<http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/terminating-instances.html>

NEW QUESTION 212

Which of the following would you use to list your AWS Import/Export jobs?

- A. Amazon RDS
- B. AWS Import/Export Web Service Tool
- C. Amazon S3 REST API
- D. AWS Elastic Beanstalk

Answer: C

Explanation: You can list AWS Import/Export jobs with the ListJobs command using the command line client or REST API.

Reference: <http://docs.aws.amazon.com/AWSImportExport/latest/DG/ListingYourJobs.html>

NEW QUESTION 215

You are setting up some IAM user policies and have also become aware that some services support resource-based permissions, which let you attach policies to the service's resources instead of to IAM users or groups. Which of the below statements is true in regards to resource-level permissions?

- A. All services support resource-level permissions for all actions.
- B. Resource-level permissions are supported by Amazon CloudFront
- C. All services support resource-level permissions only for some actions.
- D. Some services support resource-level permissions only for some action

Answer: D

Explanation: AWS Identity and Access Management is a web service that enables Amazon Web Services (AWS) customers to manage users and user permissions in AWS. The service is targeted at organizations with multiple users or systems that use AWS products such as Amazon EC2, Amazon RDS, and the AWS Management Console. With IAM, you can centrally manage users, security credentials such as access keys, and permissions that control which AWS resources users can access.

In addition to supporting IAM user policies, some services support resource-based permissions, which let you attach policies to the service's resources instead of to IAM users or groups. Resource-based permissions are supported by Amazon S3, Amazon SNS, and Amazon SQS.

The resource-level permissions service supports IAM policies in which you can specify individual resources using Amazon Resource Names (ARNs) in the policy's Resource element.

Some services support resource-level permissions only for some actions.

Reference: http://docs.aws.amazon.com/IAM/latest/UserGuide/Using_SpecificProducts.html

NEW QUESTION 216

You are using Amazon SES as an email solution but are unsure of what its limitations are. Which statement below is correct in regards to that?

- A. New Amazon SES users who have received production access can send up to 1,000 emails per 24-hour period, at a maximum rate of 10 emails per second.
- B. Every Amazon SES sender has a the same set of sending limits
- C. Sending limits are based on messages rather than on recipients
- D. Every Amazon SES sender has a unique set of sending limits

Answer: D

Explanation: Amazon Simple Email Service (Amazon SES) is a highly scalable and cost-effective email-sending service for businesses and developers. Amazon SES eliminates the complexity and expense of building an in-house email solution or licensing, installing, and operating a third-party email service for this type of email communication.

Every Amazon SES sender has a unique set of sending limits, which are calculated by Amazon SES on an ongoing basis:

Sending quota — the maximum number of emails you can send in a 24-hour period. Maximum send rate — the maximum number of emails you can send per second.

New Amazon SES users who have received production access can send up to 10,000 emails per 24-hour period, at a maximum rate of 5 emails per second.

Amazon SES automatically adjusts these limits upward, as long as you send high-quality email. If your existing quota is not adequate for your needs and the system has not automatically increased your quota, you can submit an SES Sending Quota Increase case at any time.

Sending limits are based on recipients rather than on messages. You can check your sending limits at any time by using the Amazon SES console.

Note that if your email is detected to be of poor or QUESTION able quality (e.g., high complaint rates, high bounce rates, spam, or abusive content), Amazon SES might temporarily or permanently reduce your permitted send volume, or take other action as AWS deems appropriate.

Reference: <https://aws.amazon.com/ses/faqs/>

NEW QUESTION 221

Having just set up your first Amazon Virtual Private Cloud (Amazon VPC) network, which defined a default network interface, you decide that you need to create and attach an additional network interface, known as an elastic network interface (ENI) to one of your instances. Which of the following statements is true regarding attaching network interfaces to your instances in your VPC?

- A. You can attach 5 ENIs per instance type.
- B. You can attach as many ENIs as you want.
- C. The number of ENIs you can attach varies by instance type.
- D. You can attach 100 ENIs total regardless of instance type

Answer: C

Explanation: Each instance in your VPC has a default network interface that is assigned a private IP address from the IP address range of your VPC. You can create and attach an additional network interface, known as an elastic network interface (ENI), to any instance in your VPC. The number of ENIs you can attach varies by instance type.

NEW QUESTION 226

Amazon Elastic Load Balancing is used to manage traffic on a fleet of Amazon EC2 instances, distributing traffic to instances across all availability zones within a region. Elastic Load Balancing has all the advantages of an on-premises load balancer, plus several security benefits.

Which of the following is not an advantage of ELB over an on-premise load balancer?

- A. ELB uses a four-tier, key-based architecture for encryption.
- B. ELB offers clients a single point of contact, and can also serve as the first line of defense against attacks on your network.
- C. ELB takes over the encryption and decryption work from the Amazon EC2 instances and manages it centrally on the load balancer.
- D. ELB supports end-to-end traffic encryption using TLS (previously SSL) on those networks that use secure HTTP (HTTPS) connections.

Answer: A

Explanation: Amazon Elastic Load Balancing is used to manage traffic on a fleet of Amazon EC2 instances, distributing traffic to instances across all availability zones within a region. Elastic Load Balancing has all the advantages of an on-premises load balancer, plus several security benefits:

Takes over the encryption and decryption work from the Amazon EC2 instances and manages it centrally on the load balancer

Offers clients a single point of contact, and can also serve as the first line of defense against attacks on your network

When used in an Amazon VPC, supports creation and management of security groups associated with your Elastic Load Balancing to provide additional networking and security options

Supports end-to-end traffic encryption using TLS (previously SSL) on those networks that use secure HTTP (HTTPS) connections. When TLS is used, the TLS

server certificate used to terminate client connections can be managed centrally on the load balancer, rather than on every individual instance. Reference: <http://d0.awsstatic.com/whitepapers/Security/AWS%20Security%20Whitepaper.pdf>

NEW QUESTION 231

You have set up an S3 bucket with a number of images in it and you have decided that you want anybody to be able to access these images, even anonymous users. To accomplish this you create a bucket policy. You will need to use an Amazon S3 bucket policy that specifies a in the principal element, which means anyone can access the bucket.

- A. hash tag (#)
- B. anonymous user
- C. wildcard (*)
- D. S3 user

Answer: C

Explanation: You can use the AWS Policy Generator to create a bucket policy for your Amazon S3 bucket. You can then use the generated document to set your bucket policy by using the Amazon S3 console, by a number of third-party tools, or via your application.

You use an Amazon S3 bucket policy that specifies a wildcard (*) in the principal element, which means anyone can access the bucket. With anonymous access, anyone (including users without an AWS account) will be able to access the bucket.

Reference: <http://docs.aws.amazon.com/IAM/latest/UserGuide/iam-troubleshooting.html#d0e20565>

NEW QUESTION 233

An organization has a statutory requirement to protect the data at rest for the S3 objects. Which of the below mentioned options need not be enabled by the organization to achieve data security?

- A. MFA delete for S3 objects
- B. Client side encryption
- C. Bucket versioning
- D. Data replication

Answer: D

Explanation: AWS S3 provides multiple options to achieve the protection of data at REST. The options include Permission (Policy), Encryption (Client and Server Side), Bucket Versioning and MFA based delete. The user can enable any of these options to achieve data protection. Data replication is an internal facility by AWS where S3 replicates each object across all the Availability Zones and the organization need not enable it in this case.

Reference: http://media.amazonwebservices.com/AWS_Security_Best_Practices.pdf

NEW QUESTION 237

Which of the following features are provided by Amazon EC2?

- A. Exadata Database Machine, Optimized Storage Management, Flashback Technology, and Data Warehousing
- B. Instances, Amazon Machine Images (AMIs), Key Pairs, Amazon EBS Volumes, Firewall, Elastic IP address, Tags, and Virtual Private Clouds (VPCs)
- C. Real Application Clusters (RAC), ElastiCache Machine Images (EMIs), Data Warehousing, Flashback Technology, Dynamic IP address
- D. Exadata Database Machine, Real Application Clusters (RAC), Data Guard, Table and Index Partitioning, and Data Pump Compression

Answer: B

Explanation: Amazon EC2 provides the following features:

- Virtual computing environments, known as instances;
- Pre-configured templates for your instances, known as Amazon Machine Images (AMIs), that package the bits you need for your server (including the operating system and additional software)
- Various configurations of CPU, memory, storage, and networking capacity for your instances, known as instance types
- Secure login information for your instances using key pairs (AWS stores the public key, and you store the private key in a secure place)
- Storage volumes for temporary data that's deleted when you stop or terminate your instance, known as instance store volumes
- Persistent storage volumes for your data using Amazon Elastic Block Store (Amazon EBS), known as Amazon EBS volumes
- Multiple physical locations for your resources, such as instances and Amazon EBS volumes, known as regions and Availability Zones
- A firewall that enables you to specify the protocols, ports, and source IP ranges that can reach your instances using security groups
- Static IP addresses for dynamic cloud computing, known as Elastic IP addresses
- Metadata, known as tags, that you can create and assign to your Amazon EC2 resources
- Virtual networks you can create that are logically isolated from the rest of the AWS cloud, and that you can optionally connect to your own network, known as virtual private clouds (VPCs).

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/concepts.html>

NEW QUESTION 240

In Amazon Elastic Compute Cloud, which of the following is used for communication between instances in the same network (EC2-Classic or a VPC)?

- A. Private IP addresses
- B. Elastic IP addresses
- C. Static IP addresses
- D. Public IP addresses

Answer: A

Explanation: A private IP address is an IP address that's not reachable over the Internet. You can use private IP addresses for communication between instances

in the same network (EC2-Classic or a VPC). Reference:
<http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/using-instance-addressing.html>

NEW QUESTION 242

A friend tells you he is being charged \$100 a month to host his WordPress website, and you tell him you can move it to AWS for him and he will only pay a fraction of that, which makes him very happy. He then tells you he is being charged \$50 a month for the domain, which is registered with the same people that set it up, and he asks if it's possible to move that to AWS as well. You tell him you aren't sure, but will look into it. Which of the following statements is true in regards to transferring domain names to AWS?

- A. You can't transfer existing domains to AWS.
- B. You can transfer existing domains into Amazon Route 53's management.
- C. You can transfer existing domains via AWS Direct Connect.
- D. You can transfer existing domains via AWS Import/Export

Answer: B

Explanation: With Amazon Route 53, you can create and manage your public DNS records with the AWS Management Console or with an easy-to-use API. If you need a domain name, you can find an available name and register it using Amazon Route 53. You can also transfer existing domains into Amazon Route 53's management.

Reference: <http://aws.amazon.com/route53/>

NEW QUESTION 243

Are penetration tests allowed as long as they are limited to the customer's instances?

- A. Yes, they are allowed but only for selected regions.
- B. No, they are never allowed.
- C. Yes, they are allowed without any permission.
- D. Yes, they are allowed but only with approval.

Answer: D

Explanation: Penetration tests are allowed after obtaining permission from AWS to perform them. Reference: <http://aws.amazon.com/security/penetration-testing/>

NEW QUESTION 245

A user has created an ELB with the availability zone US-East-1A. The user wants to add more zones to ELB to achieve High Availability. How can the user add more zones to the existing ELB?

- A. The user should stop the ELB and add zones and instances as required
- B. The only option is to launch instances in different zones and add to ELB
- C. It is not possible to add more zones to the existing ELB
- D. The user can add zones on the fly from the AWS console

Answer: D

Explanation: The user has created an Elastic Load Balancer with the availability zone and wants to add more zones to the existing ELB. The user can do so in two ways:

From the console or CLI, add new zones to ELB;

Launch instances in a separate AZ and add instances to the existing ELB. Reference:

<http://docs.aws.amazon.com/ElasticLoadBalancing/latest/DeveloperGuide/enable-disable-az.html>

NEW QUESTION 246

AWS Identity and Access Management is a web service that enables Amazon Web Services (AWS) customers to manage users and user permissions in AWS. In addition to supporting IAM user policies, some services support resource-based permissions. Which of the following services are supported by resource-based permissions?

- A. Amazon SNS, and Amazon SQS and AWS Direct Connect.
- B. Amazon S3 and Amazon SQS and Amazon ElastiCache.
- C. Amazon S3, Amazon SNS, Amazon SQS, Amazon Glacier and Amazon EBS.
- D. Amazon Glacier, Amazon SNS, and Amazon CloudWatch

Answer: C

Explanation: In addition to supporting IAM user policies, some services support resource-based permissions, which let you attach policies to the service's resources instead of to IAM users or groups. Resource-based permissions are supported by Amazon S3, Amazon SNS, Amazon SQS, Amazon Glacier and Amazon EBS.

Reference: http://docs.aws.amazon.com/IAM/latest/UserGuide/Using_SpecificProducts.html

NEW QUESTION 251

Content and IV|edia Server is the latest requirement that you need to meet for a client.

The client has been very specific about his requirements such as low latency, high availability, durability, and access control. Potentially there will be millions of views on this server and because of "spiky" usage patterns, operations teams will need to provision static hardware, network, and management resources to support the maximum expected need. The Customer base will be initially low but is expected to grow and become more geographically distributed.

Which of the following would be a good solution for content distribution?

- A. Amazon S3 as both the origin server and for caching
- B. AWS Storage Gateway as the origin server and Amazon EC2 for caching
- C. AWS CloudFront as both the origin server and for caching
- D. Amazon S3 as the origin server and Amazon CloudFront for caching

Answer: D

Explanation: As your customer base grows and becomes more geographically distributed, using a high- performance edge cache like Amazon CloudFront can provide substantial improvements in latency, fault tolerance, and cost.

By using Amazon S3 as the origin server for the Amazon CloudFront distribution, you gain the advantages of fast in-network data transfer rates, simple publishing/caching workflow, and a unified security framework.

Amazon S3 and Amazon CloudFront can be configured by a web service, the AWS Management Console, or a host of third-party management tools.

Reference: http://media.amazonwebservices.com/architecturecenter/AWS_ac_ra_media_02.pdf

NEW QUESTION 252

You are setting up your first Amazon Virtual Private Cloud (Amazon VPC) network so you decide you should probably use the AWS Management Console and the VPC Wizard. Which of the following is not an option for network architectures after launching the "Start VPC Wizard" in Amazon VPC page on the AWS Management Console?

- A. VPC with a Single Public Subnet Only
- B. VPC with a Public Subnet Only and Hardware VPN Access
- C. VPC with Public and Private Subnets and Hardware VPN Access
- D. VPC with a Private Subnet Only and Hardware VPN Access

Answer: B

Explanation: Amazon VPC enables you to build a virtual network in the AWS cloud - no VPNs, hardware, or physical datacenters required.

Your AWS resources are automatically provisioned in a ready-to-use default VPC. You can choose to create additional VPCs by going to Amazon VPC page on the AWS Management Console and click on the "Start VPC Wizard" button.

You'll be presented with four basic options for network architectures. After selecting an option, you can modify the size and IP address range of the VPC and its subnets. If you select an option with Hardware VPN Access, you will need to specify the IP address of the VPN hardware on your network. You can modify the VPC to add more subnets or add or remove gateways at any time after the VPC has been created.

The four options are:

VPC with a Single Public Subnet Only VPC with Public and Private Subnets

VPC with Public and Private Subnets and Hardware VPN Access VPC with a Private Subnet Only and Hardware VPN Access Reference:

<https://aws.amazon.com/vpc/faqs/>

NEW QUESTION 253

An EC2 instance is connected to an ENI (Elastic Network Interface) in one subnet. What happens when you attach an ENI of a different subnet to this EC2 instance?

- A. The EC2 instance follows the rules of the older subnet
- B. The EC2 instance follows the rules of both the subnets
- C. Not possible, cannot be connected to 2 ENIs
- D. The EC2 instance follows the rules of the newer subnet

Answer: B

Explanation: AWS allows you create an elastic network interface (ENI), attach an ENI to an EC2 instance, detach an ENI from an EC2 instance and attach this ENI to another EC2 instance. The attributes of a network traffic follow the ENI which is attached to an EC2 instance or detached from an EC2 instance. When you move an ENI from one EC2 instance to another, network traffic is redirected to the new EC2 instance. You can create and attach additional ENIs to an EC2 instance.

Attaching multiple network interfaces (ENIs) to an EC2 instance is useful to: Create a management network.

Use network and security appliances in your VPC.

Create dual-homed instances with workloads/roles on distinct subnets Create a low-budget, high-availability solution.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/using-eni.html>

NEW QUESTION 256

A user is trying to launch a similar EC2 instance from an existing instance with the option "Launch More like this". The AMI of the selected instance is deleted. What will happen in this case?

- A. AWS does not need an AMI for the "Launch more like this" option
- B. AWS will launch the instance but will not create a new AMI
- C. AWS will create a new AMI and launch the instance
- D. AWS will throw an error saying that the AMI is deregistered

Answer: D

Explanation: If the user has deregistered the AMI of an EC2 instance and is trying to launch a similar instance with the option "Launch more like this", AWS will throw an error saying that the AMI is deregistered or not available.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/launching-instance.html>

NEW QUESTION 257

Your company has multiple IT departments, each with their own VPC. Some VPCs are located within the same AWS account, and others in a different AWS account. You want to peer together all VPCs to enable the IT departments to have full access to each others' resources. There are certain limitations placed on

VPC peering. Which of the following statements is incorrect in relation to VPC peering?

- A. Private DNS values cannot be resolved between instances in peered VPCs.
- B. You can have up to 3 VPC peering connections between the same two VPCs at the same time.
- C. You cannot create a VPC peering connection between VPCs in different regions.
- D. You have a limit on the number active and pending VPC peering connections that you can have per VPC.

Answer: B

Explanation: To create a VPC peering connection with another VPC, you need to be aware of the following limitations and rules:

You cannot create a VPC peering connection between VPCs that have matching or overlapping CIDR blocks.

You cannot create a VPC peering connection between VPCs in different regions.

You have a limit on the number active and pending VPC peering connections that you can have per VPC. VPC peering does not support transitive peering relationships; in a VPC peering connection, your VPC will not have access to any other VPCs that the peer VPC may be peered with. This includes VPC peering connections that are established entirely within your own AWS account.

You cannot have more than one VPC peering connection between the same two VPCs at the same time. The Maximum Transmission Unit (MTU) across a VPC peering connection is 1500 bytes.

A placement group can span peered VPCs; however, you will not get full-bisection bandwidth between instances in peered VPCs.

Unicast reverse path forwarding in VPC peering connections is not supported.

You cannot reference a security group from the peer VPC as a source or destination for ingress or egress rules in your security group. Instead, reference CIDR blocks of the peer VPC as the source or destination of your security group's ingress or egress rules.

Private DNS values cannot be resolved between instances in peered VPCs. Reference:

<http://docs.aws.amazon.com/AmazonVPC/latest/PeeringGuide/vpc-peering-overview.html#vpc-peering-limitations>

NEW QUESTION 259

A friend wants you to set up a small BitTorrent storage area for him on Amazon S3. You tell him it is highly unlikely that AWS would allow such a thing in their infrastructure. However you decide to investigate. Which of the following statements best describes using BitTorrent with Amazon S3?

- A. Amazon S3 does not support the BitTorrent protocol because it is used for pirated software.
- B. You can use the BitTorrent protocol but only for objects that are less than 100 GB in size.
- C. You can use the BitTorrent protocol but you need to ask AWS for specific permissions first.
- D. You can use the BitTorrent protocol but only for objects that are less than 5 GB in size.

Answer: D

Explanation: BitTorrent is an open, peer-to-peer protocol for distributing files. You can use the BitTorrent protocol to retrieve any publicly-accessible object in Amazon S3.

Amazon S3 supports the BitTorrent protocol so that developers can save costs when distributing content at high scale. Amazon S3 is useful for simple, reliable storage of any data. The default distribution mechanism for Amazon S3 data is via client/server download. In client/server distribution, the entire object is transferred point-to-point from Amazon S3 to every authorized user who requests that object. While client/server delivery is appropriate for a wide variety of use cases, it is not optimal for everybody. Specifically, the costs of client/server distribution increase linearly as the number of users downloading objects increases. This can make it expensive to distribute popular objects.

BitTorrent addresses this problem by recruiting the very clients that are downloading the object as distributors themselves: Each client downloads some pieces of the object from Amazon S3 and some from other clients, while simultaneously uploading pieces of the same object to other interested "peers." The benefit for publishers is that for large, popular files the amount of data actually supplied by Amazon S3 can be substantially lower than what it would have been serving the same clients via client/server download. Less data transferred means lower costs for the publisher of the object.

Reference: <http://docs.aws.amazon.com/AmazonS3/latest/dev/S3Torrent.html>

NEW QUESTION 264

In the most recent company meeting, your CEO focused on the fact that everyone in the organization needs to make sure that all of the infrastructure that is built is truly scalable. Which of the following statements is incorrect in reference to scalable architecture?

- A. A scalable service is capable of handling heterogeneity.
- B. A scalable service is resilient.
- C. A scalable architecture won't be cost effective as it grows.
- D. Increasing resources results in a proportional increase in performance.

Answer: C

Explanation: In AWS it is critical to build a scalable architecture in order to take advantage of a scalable infrastructure. The cloud is designed to provide conceptually infinite scalability. However, you cannot leverage all that scalability in infrastructure if your architecture is not scalable. Both have to work together.

You will have to identify the monolithic components and bottlenecks in your architecture, identify the areas where you cannot leverage the on-demand provisioning capabilities in your architecture, and work to refactor your application, in order to leverage the scalable infrastructure and take advantage of the cloud.

Characteristics of a truly scalable application:

Increasing resources results in a proportional increase in performance A scalable service is capable of handling heterogeneity

A scalable service is operationally efficient A scalable service is resilient

A scalable service should become more cost effective when it grows (Cost per unit reduces as the number of units increases)

Reference: http://media.amazonwebservices.com/AWS_Cloud_Best_Practices.pdf

NEW QUESTION 267

A user is planning a highly available application deployment with EC2. Which of the below mentioned options will not help to achieve HA?

- A. Elastic IP address
- B. PIOPS
- C. AMI
- D. Availability Zones

Answer: B

Explanation: In Amazon Web Service, the user can achieve HA by deploying instances in multiple zones. The elastic IP helps the user achieve HA when one of the instances is down but still keeps the same URL. The AM helps launching the new instance. The PIOPS is for the performance of EBS and does not help for HA. Reference: http://media.amazonwebservices.com/AWS_Web_Hosting_Best_Practices.pdf

NEW QUESTION 268

You have been given a scope to set up an AWS Media Sharing Framework for a new start up photo sharing company similar to flickr. The first thing that comes to mind about this is that it will obviously need a huge amount of persistent data storage for this framework. Which of the following storage options would be appropriate for persistent storage?

- A. Amazon Glacier or Amazon S3
- B. Amazon Glacier or AWS Import/Export
- C. AWS Import/Export or Amazon CloudFront
- D. Amazon EBS volumes or Amazon S3

Answer: D

Explanation: Persistent storage-If you need persistent virtual disk storage similar to a physical disk drive for files or other data that must persist longer than the lifetime of a single Amazon EC2 instance, Amazon EBS volumes or Amazon S3 are more appropriate.

Reference: http://media.amazonwebservices.com/AWS_Storage_Options.pdf

NEW QUESTION 273

After deploying a new website for a client on AWS, he asks if you can set it up so that if it fails it can be automatically redirected to a backup website that he has stored on a dedicated server elsewhere. You are wondering whether Amazon Route 53 can do this. Which statement below is correct in regards to Amazon Route 53?

- A. Amazon Route 53 can't help detect an outage
- B. You need to use another service.
- C. Amazon Route 53 can help detect an outage of your website and redirect your end users to alternate locations.
- D. Amazon Route 53 can help detect an outage of your website but can't redirect your end users to alternate locations.
- E. Amazon Route 53 can't help detect an outage of your website, but can redirect your end users to alternate locations.

Answer: B

Explanation: With DNS Failover, Amazon Route 53 can help detect an outage of your website and redirect your end users to alternate locations where your application is operating properly.

Reference:

<http://aws.amazon.com/about-aws/whats-new/2013/02/11/announcing-dns-failover-for-route-53/>

NEW QUESTION 275

Which of the following statements is true of Amazon EC2 security groups?

- A. You can change the outbound rules for EC2-Classi
- B. Also, you can add and remove rules to a group at any time.
- C. You can modify an existing rule in a grou
- D. However, you can't add and remove rules to a group.
- E. None of the statements are correct.
- F. You can't change the outbound rules for EC2-Classi
- G. However, you can add and remove rules to a group at any tim

Answer: D

Explanation: When dealing with security groups, bear in mind that you can freely add and remove rules from a group, but you can't change the outbound rules for EC2-Classic. If you're using the Amazon EC2 console, you can modify existing rules, and you can copy the rules from an existing security group to a new security group.

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/using-network-security.html>

NEW QUESTION 277

While creating a network in the VPC, which of the following is true of a NAT device?

- A. You have to administer the NAT Gateway Service provided by AWS.
- B. You can choose to use any of the three kinds of NAT devices offered by AWS for special purposes.
- C. You can use a NAT device to enable instances in a private subnet to connect to the Internet.
- D. You are recommended to use AWS NAT instances over NAT gateways, as the instances provide better availability and bandwidth.

Answer: C

Explanation: You can use a NAT device to enable instances in a private subnet to connect to the Internet (for example, for software updates) or other AWS services, but prevent the Internet from initiating connections with the instances. AWS offers two kinds of NAT devices u a NAT gateway or a NAT instance. We recommend NAT gateways, as they provide better availability and bandwidth over NAT instances. The NAT Gateway service is also a managed service that does not require your administration efforts. A NAT instance is launched from a NAT AM. You can choose to use a NAT instance for special purposes.

Reference: <http://docs.aws.amazon.com/AmazonVPC/latest/UserGuide/vpc-nat.html>

NEW QUESTION 279

You need to create a management network using network interfaces for a virtual private cloud (VPC) network. Which of the following statements is incorrect pertaining to Best Practices for Configuring Network Interfaces.

- A. You can detach secondary (ethN) network interfaces when the instance is running or stopped
- B. However, you can't detach the primary (eth0) interface.
- C. Launching an instance with multiple network interfaces automatically configures interfaces, private IP addresses, and route tables on the operating system of the instance.
- D. You can attach a network interface in one subnet to an instance in another subnet in the same VPC, however, both the network interface and the instance must reside in the same Availability Zone.
- E. Attaching another network interface to an instance is a valid method to increase or double the network bandwidth to or from the dual-homed instance

Answer: D

Explanation: Best Practices for Configuring Network Interfaces

You can attach a network interface to an instance when it's running (hot attach), when it's stopped (warm attach), or when the instance is being launched (cold attach).

You can detach secondary (ethN) network interfaces when the instance is running or stopped. However, you can't detach the primary (eth0) interface.

You can attach a network interface in one subnet to an instance in another subnet in the same VPC, however, both the network interface and the instance must reside in the same Availability Zone.

When launching an instance from the CLI or API, you can specify the network interfaces to attach to the instance for both the primary (eth0) and additional network interfaces.

Launching an instance with multiple network interfaces automatically configures interfaces, private IP addresses, and route tables on the operating system of the instance.

A warm or hot attach of an additional network interface may require you to manually bring up the second interface, configure the private IP address, and modify the route table accordingly. (Instances running Amazon Linux automatically recognize the warm or hot attach and configure themselves.)

Attaching another network interface to an instance is not a method to increase or double the network bandwidth to or from the dual-homed instance.

Reference:

<http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/using-eni.html#use-network-and-security-appliances-in-your-vpc>

NEW QUESTION 283

All Amazon EC2 instances are assigned two IP addresses at launch. Which are those?

- A. 2 Elastic IP addresses
- B. A private IP address and an Elastic IP address
- C. A public IP address and an Elastic IP address
- D. A private IP address and a public IP address

Answer: D

Explanation: In Amazon EC2-Classical every instance is given two IP Addresses: a private IP address and a public IP address

Reference:

<http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/using-instance-addressing.html#differences>

NEW QUESTION 284

You want to establish a dedicated network connection from your premises to AWS in order to save money by transferring data directly to AWS rather than through your internet service provider. You are sure there must be some other benefits beyond cost savings. Which of the following would not be considered a benefit if you were to establish such a connection?

- A. Elasticity
- B. Compatibility with all AWS services.
- C. Private connectivity to your Amazon VPC.
- D. Everything listed is a benefit

Answer: D

Explanation: AWS Direct Connect makes it easy to establish a dedicated network connection from your premises to AWS.

Using AWS Direct Connect, you can establish private connectivity between AWS and your datacenter, office, or colocation environment, which in many cases can reduce your network costs, increase bandwidth throughput, and provide a more consistent network experience than internet-based connections.

You could expect the following benefits if you use AWS Direct Connect. Reduced bandwidth costs

Consistent network performance Compatibility with all AWS services Private connectivity to your Amazon VPC Elasticity

Simplicity

Reference: <http://aws.amazon.com/directconnect/>

NEW QUESTION 285

Can you encrypt EBS volumes?

- A. Yes, you can enable encryption when you create a new EBS volume using the AWS Management Console, API, or CLI.
- B. No, you should use a third-party software to perform raw block-level encryption of an EBS volume.
- C. Yes, but you must use a third-party API for encrypting data before it's loaded on EBS.
- D. Yes, you can encrypt with the special "ebs_encrypt" command through Amazon API

Answer: A

Explanation: With Amazon EBS encryption, you can now create an encrypted EBS volume and attach it to a supported instance type. Data on the volume, disk

I/O, and snapshots created from the volume are then all encrypted. The encryption occurs on the servers that host the EC2 instances, providing encryption of data as it moves between EC2 instances and EBS storage. EBS encryption is based on the industry standard AES-256 cryptographic algorithm.

To get started, simply enable encryption when you create a new EBS volume using the AWS Management Console, API, or CLI. Amazon EBS encryption is available for all the latest EC2 instances in all commercially available AWS regions.

Reference:

<https://aws.amazon.com/about-aws/whats-new/2014/05/21/Amazon-EBS-encryption-now-available/>

NEW QUESTION 290

In Amazon EC2, you are billed instance-hours when .

- A. your EC2 instance is in a running state
- B. the instance exits from Amazon S3 console
- C. your instance still exits the EC2 console
- D. EC2 instances stop

Answer: A

Explanation: You are billed instance-hours as long as your EC2 instance is in a running state. Reference: <http://aws.amazon.com/ec2/faqs/>

NEW QUESTION 295

While controlling access to Amazon EC2 resources, which of the following acts as a firewall that controls the traffic allowed to reach one or more instances?

- A. A security group
- B. An instance type
- C. A storage cluster
- D. An object

Answer: A

Explanation: A security group acts as a firewall that controls the traffic allowed to reach one or more instances. When you launch an instance, you assign it one or more security groups.

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/UsingIAM.html>

NEW QUESTION 299

A user is running a webserver on EC2. The user wants to receive the SMS when the EC2 instance utilization is above the threshold limit. Which AWS services should the user configure in this case?

- A. AWS CloudWatch + AWS SQS.
- B. AWS CloudWatch + AWS SNS.
- C. AWS CloudWatch + AWS SES.
- D. AWS EC2 + AWS Cloudwatch

Answer: B

Explanation: Amazon SNS makes it simple and cost-effective to push to mobile devices, such as iPhone, iPad, Android, Kindle Fire, and internet connected smart devices, as well as pushing to other distributed services. In this case, the user can configure that Cloudwatch sends an alarm on when the threshold is crossed to SNS which will trigger an SMS.

Reference: <http://aws.amazon.com/sns/>

NEW QUESTION 302

A user is making a scalable web application with compartmentalization. The user wants the log module to be able to be accessed by all the application functionalities in an asynchronous way. Each module of the application sends data to the log module, and based on the resource availability it will process the logs. Which AWS service helps this functionality?

- A. AWS Simple Queue Service.
- B. AWS Simple Notification Service.
- C. AWS Simple Workflow Service.
- D. AWS Simple Email Service

Answer: A

Explanation: Amazon Simple Queue Service (SQS) is a highly reliable distributed messaging system for storing messages as they travel between computers. By using Amazon SQS, developers can simply move data between distributed application components. It is used to achieve compartmentalization or loose coupling. In this case all the modules will send a message to the logger queue and the data will be processed by queue as per the resource availability.

Reference: http://media.amazonwebservices.com/AWS_Building_Fault_Tolerant_Applications.pdf

NEW QUESTION 303

You have some very sensitive data stored on AWS S3 and want to try every possible alternative to keeping it secure in regards to access control. What are the mechanisms available for access control on AWS S3?

- A. (IAM) policies, Access Control Lists (ACLs), bucket policies, and query string authentication.
- B. (IAM) policies, Access Control Lists (ACLs) and bucket policies.
- C. Access Control Lists (ACLs), bucket policies, and query string authentication

D. (IAM) policies, Access Control Lists (ACLs), bucket policies, query string authentication and encryption.

Answer: A

Explanation: Amazon S3 supports several mechanisms that give you flexibility to control who can access your data as well as how, when, and where they can access it.

Amazon S3 provides four different access control mechanisms:

AWS Identity and Access Management (IAM) policies, Access Control Lists (ACLs), bucket policies, and query string authentication.

IAM enables organizations to create and manage multiple users under a single AWS account. With IAM policies, you can grant IAM users fine-grained control to your Amazon S3 bucket or objects. You can use ACLs to selectively add (grant) certain permissions on individual objects.

Amazon S3 bucket policies can be used to add or deny permissions across some or all of the objects within a single bucket.

With Query string authentication, you have the ability to share Amazon S3 objects through URLs that are valid for a specified period of time.

NEW QUESTION 304

You have written a CloudFormation template that creates 1 Elastic Load Balancer fronting 2 EC2 Instances. Which section of the template should you edit so that the DNS of the load balancer is returned upon creation of the stack?

- A. Resources
- B. Outputs
- C. Parameters
- D. Mappings

Answer: B

Explanation: You can use AWS CloudFormation's sample templates or create your own templates to describe the AWS resources, and any associated dependencies or runtime parameters, required to run your application.

Reference:

<http://docs.aws.amazon.com/AWSCloudFormation/latest/UserGuide/outputs-section-structure.html>

NEW QUESTION 306

You have been asked to set up a database in AWS that will require frequent and granular updates. You know that you will require a reasonable amount of storage space but are not sure of the best option. What is the recommended storage option when you run a database on an instance with the above criteria?

- A. Amazon S3
- B. Amazon EBS
- C. AWS Storage Gateway
- D. Amazon Glacier

Answer: B

Explanation: Amazon EBS provides durable, block-level storage volumes that you can attach to a running Amazon EC2 instance. You can use Amazon EBS as a primary storage device for data that requires frequent and granular updates. For example, Amazon EBS is the recommended storage option when you run a database on an instance.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/Storage.html>

NEW QUESTION 307

A user has hosted an application on EC2 instances. The EC2 instances are configured with ELB and Auto Scaling. The application server session time out is 2 hours. The user wants to configure connection draining to ensure that all in-flight requests are supported by ELB even though the instance is being deregistered. What time out period should the user specify for connection draining?

- A. 1 hour
- B. 30 minutes
- C. 5 minutes
- D. 2 hours

Answer: A

Explanation: The Elastic Load Balancer connection draining feature causes the load balancer to stop sending new requests to the back-end instances when the instances are deregistering or become unhealthy, while ensuring that in-flight requests continue to be served. The user can specify a maximum time of 3600 seconds (1 hour) for the load balancer to keep the connections alive before reporting the instance as deregistered. If the user does not specify the maximum timeout period, by default, the load balancer will close the connections to the deregistering instance after 300 seconds.

Reference:

<http://docs.aws.amazon.com/ElasticLoadBalancing/latest/DeveloperGuide/config-conn-drain.html>

NEW QUESTION 312

How can you apply more than 100 rules to an Amazon EC2-Classic?

- A. By adding more security groups
- B. You need to create a default security group specifying your required rules if you need to use more than 100 rules per security group.
- C. By default the Amazon EC2 security groups support 500 rules.
- D. You can't add more than 100 rules to security groups for an Amazon EC2 instance

Answer: D

Explanation:

In EC2-Classic, you can associate an instance with up to 500 security groups and add up to 100 rules to a security group.

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/using-network-security.html>

NEW QUESTION 316

Identify a true statement about the On-Demand instances purchasing option provided by Amazon EC2.

- A. Pay for the instances that you use by the hour, with no long-term commitments or up-front payments.
- B. Make a low, one-time, up-front payment for an instance, reserve it for a one- or three-year term, and pay a significantly lower hourly rate for these instances.
- C. Pay for the instances that you use by the hour, with long-term commitments or up-front payments.
- D. Make a high, one-time, all-front payment for an instance, reserve it for a one- or three-year term, and pay a significantly higher hourly rate for these instance

Answer: A

Explanation: On-Demand instances allow you to pay for the instances that you use by the hour, with no long-term commitments or up-front payments.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/reserved-instances-offerings.html>

NEW QUESTION 320

Which of the following statements is NOT true about using Elastic IP Address (EIP) in EC2-Classic and EC2-VPC platforms?

- A. In the EC2-VPC platform, the Elastic IP Address (EIP) does not remain associated with the instance when you stop it.
- B. In the EC2-Classic platform, stopping the instance disassociates the Elastic IP Address (EIP) from it.
- C. In the EC2-VPC platform, if you have attached a second network interface to an instance, when you disassociate the Elastic IP Address (EIP) from that instance, a new public IP address is not assigned to the instance automatically; you'll have to associate an EIP with it manually.
- D. In the EC2-Classic platform, if you disassociate an Elastic IP Address (EIP) from the instance, the instance is automatically assigned a new public IP address within a few minutes.

Answer: A

Explanation: In the EC2-Classic platform, when you associate an Elastic IP Address (EIP) with an instance, the instance's current public IP address is released to the EC2-Classic public IP address pool. If you disassociate an EIP from the instance, the instance is automatically assigned a new public IP address within a few minutes. In addition, stopping the instance also disassociates the EIP from it.

But in the EC2-VPC platform, when you associate an EIP with an instance in a default Virtual Private Cloud (VPC), or an instance in which you assigned a public IP to the eth0 network interface during launch, its current public IP address is released to the EC2-VPC public IP address pool. If you disassociate an EIP from the instance, the instance is automatically assigned a new public IP address within a few minutes. However, if you have attached a second network interface to the instance, the instance is not automatically assigned a new public IP address; you'll have to associate an EIP with it manually. The EIP remains associated with the instance when you stop it.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/elastic-ip-addresses-eip.html>

NEW QUESTION 324

In Amazon EC2, how many Elastic IP addresses can you have by default?

- A. 10
- B. 2
- C. 5
- D. 20

Answer: C

Explanation: The number of Elastic IP addresses you can have in EC2 is 5.

Reference: http://docs.aws.amazon.com/general/latest/gr/aws_service_limits.html#limits_ec2

NEW QUESTION 326

After deciding that EMR will be useful in analysing vast amounts of data for a gaming website that you are architecting you have just deployed an Amazon EMR Cluster and wish to monitor the cluster performance. Which of the following tools cannot be used to monitor the cluster performance?

- A. Kinesis
- B. Ganglia
- C. CloudWatch Metrics
- D. Hadoop Web Interfaces

Answer: A

Explanation: Amazon EMR provides several tools to monitor the performance of your cluster. Hadoop Web Interfaces

Every cluster publishes a set of web interfaces on the master node that contain information about the cluster. You can access these web pages by using an SSH tunnel to connect them on the master node. For more information, see View Web Interfaces Hosted on Amazon EMR Clusters.

CloudWatch Metrics

Every cluster reports metrics to CloudWatch. CloudWatch is a web service that tracks metrics, and which you can use to set alarms on those metrics. For more information, see Monitor Metrics with CloudWatch. Ganglia

Ganglia is a cluster monitoring tool. To have this available, you have to install Ganglia on the cluster when you launch it. After you've done so, you can monitor the cluster as it runs by using an SSH tunnel to connect to the Ganglia UI running on the master node. For more information, see Monitor Performance with Ganglia.

Reference:

<http://docs.aws.amazon.com/ElasticMapReduce/latest/DeveloperGuide/emr-troubleshoot-tools.html>

NEW QUESTION 329

Can you move a Reserved Instance from one Availability Zone to another?

- A. Yes, but each Reserved Instance is associated with a specific Region that cannot be changed.
- B. Yes, only in US-West-2.
- C. Yes, only in US-East-1.
- D. No

Answer: A

Explanation: Each Reserved Instance is associated with a specific Region, which is fixed for the lifetime of the reservation and cannot be changed. Each reservation can, however, be used in any of the available AZs within the associated Region.

Reference: <https://aws.amazon.com/rds/faqs/>

NEW QUESTION 332

You need to develop and run some new applications on AWS and you know that Elastic Beanstalk and CloudFormation can both help as a deployment mechanism for a broad range of AWS resources. Which of the following statements best describes the differences between Elastic Beanstalk and CloudFormation?

- A. Elastic Beanstalk uses Elastic load balancing and CloudFormation doesn't.
- B. CloudFormation is faster in deploying applications than Elastic Beanstalk.
- C. Elastic Beanstalk is faster in deploying applications than CloudFormation.
- D. CloudFormation is much more powerful than Elastic Beanstalk, because you can actually design and script custom resources

Answer: D

Explanation: These services are designed to complement each other. AWS Elastic Beanstalk provides an environment to easily develop and run applications in the cloud. It is integrated with developer tools and provides a one-stop experience for you to manage the lifecycle of your applications. AWS CloudFormation is a convenient deployment mechanism for a broad range of AWS resources. It supports the infrastructure needs of many different types of applications such as existing enterprise applications, legacy applications, applications built using a variety of AWS resources and container-based solutions (including those built using AWS Elastic Beanstalk).

AWS CloudFormation introduces two new concepts: The template, a JSON-format, text-based file that describes all the AWS resources you need to deploy to run your application and the stack, the set of AWS resources that are created and managed as a single unit when AWS CloudFormation instantiates a template.

Reference: <http://aws.amazon.com/cloudformation/faqs/>

NEW QUESTION 336

You need to set up a security certificate for a client's e-commerce website as it will use the HTTPS protocol. Which of the below AWS services do you need to access to manage your SSL server certificate?

- A. AWS Directory Service
- B. AWS Identity & Access Management
- C. AWS CloudFormation
- D. Amazon Route 53

Answer: B

Explanation: AWS Identity and Access Management (IAM) is a web service that enables Amazon Web Services (AWS) customers to manage users and user permissions in AWS.

All your SSL server certificates are managed by AWS Identity and Access management (IAM). Reference:

<http://docs.aws.amazon.com/IAM/latest/UserGuide/ManagingServerCerts.html>

NEW QUESTION 341

When controlling access to Amazon EC2 resources, each Amazon EBS Snapshot has a attribute that controls which AWS accounts can use the snapshot.

- A. createVolumePermission
- B. LaunchPermission
- C. SharePermission
- D. RequestPermission

Answer: A

Explanation: Each Amazon EBS Snapshot has a createVolumePermission attribute that you can set to one or more AWS Account IDs to share the AM with those AWS Accounts. To allow several AWS Accounts to use a particular EBS snapshot, you can use the snapshots's createVolumePermission attribute to include a list of the accounts that can use it.

Reference: <http://docs.amazonwebservices.com/AWSEC2/latest/UserGuide/UsingIAM.html>

NEW QUESTION 346

Your customer wishes to deploy an enterprise application to AWS which will consist of several web servers, several application servers and a small (50GB) Oracle database information is stored, both in the database and the file systems of the various servers. The backup system must support database recovery whole server and whole disk restores, and individual file restores with a recovery time of no more than two hours. They have chosen to use RDS Oracle as the database Which backup architecture will meet these requirements?

- A. Backup RDS using automated daily DB backups Backup the EC2 instances using AMIs and supplement with file-level backup to S3 using traditional enterprise backup software to provide file level restore
- B. Backup RDS using a Multi-AZ Deployment Backup the EC2 instances using AMIs, and supplement by copying file system data to S3 to provide file level restore.

- C. Backup RDS using automated daily DB backups Backup the EC2 instances using EBS snapshots and supplement with file-level backups to Amazon Glacier using traditional enterprise backup software to provide file level restore
- D. Backup RDS database to S3 using Oracle RMAN Backup the EC2 instances using Amis, and supplement with EBS snapshots for individual volume restore.

Answer: A

Explanation: Point-In-Time Recovery

In addition to the daily automated backup, Amazon RDS archives database change logs. This enables you to recover your database to any point in time during the backup retention period, up to the last five minutes of database usage.

Amazon RDS stores multiple copies of your data, but for Single-AZ DB instances these copies are stored in a single availability zone. If for any reason a Single-AZ DB instance becomes unusable, you can use point-in-time recovery to launch a new DB instance with the latest restorable data. For more information on working with point-in-time recovery, go to Restoring a DB Instance to a Specified Time.

Note

Multi-AZ deployments store copies of your data in different Availability Zones for greater levels of data durability. For more information on Multi-AZ deployments, see High Availability (Multi-AZ).

NEW QUESTION 350

Your company has HQ in Tokyo and branch offices all over the world and is using a logistics software with a multi-regional deployment on AWS in Japan, Europe and USA, The logistic software has a 3- tier architecture and currently uses MySQL 5.6 for data persistence. Each region has deployed its own database In the HQ region you run an hourly batch process reading data from every region to compute cross regional reports that are sent by email to all offices this batch process must be completed as fast as possible to quickly optimize logistics how do you build the database architecture in order to meet the requirements'?

- A. For each regional deployment, use RDS MySQL with a master in the region and a read replica in the HQ region
- B. For each regional deployment, use MySQL on EC2 with a master in the region and send hourly EBS snapshots to the HQ region
- C. For each regional deployment, use RDS MySQL with a master in the region and send hourly RDS snapshots to the HQ region
- D. For each regional deployment, use MySQL on EC2 with a master in the region and use S3 to copy data files hourly to the HQ region
- E. Use Direct Connect to connect all regional MySQL deployments to the HQ region and reduce network latency for the batch process

Answer: A

NEW QUESTION 352

A customer has a 10 GB AWS Direct Connect connection to an AWS region where they have a web application hosted on Amazon Elastic Computer Cloud (EC2). The application has dependencies on an on-premises mainframe database that uses a BASE (Basic Available. Sort stale Eventual consistency) rather than an ACID (Atomicity. Consistency isolation. Durability) consistency model.

The application is exhibiting undesirable behavior because the database is not able to handle the volume of writes. How can you reduce the load on your on-premises database resources in the most cost-effective way?

- A. Use an Amazon Elastic Map Reduce (EMR) S3DistCp as a synchronization mechanism between the on-premises database and a Hadoop cluster on AWS.
- B. Modify the application to write to an Amazon SQS queue and develop a worker process to flush the queue to the on-premises database.
- C. Modify the application to use DynamoDB to feed an EMR cluster which uses a map function to write to the on-premises database.
- D. Provision an RDS read-replica database on AWS to handle the writes and synchronize the two databases using Data Pipeline.

Answer: A

Explanation: Reference: <https://aws.amazon.com/blogs/aws/category/amazon-elastic-map-reduce/>

NEW QUESTION 356

Your company plans to host a large donation website on Amazon Web Services (AWS). You anticipate a large and undetermined amount of traffic that will create many database writes. To be certain that you do not drop any writes to a database hosted on AWS. Which service should you use?

- A. Amazon RDS with provisioned IOPS up to the anticipated peak write throughput.
- B. Amazon Simple Queue Service (SQS) for capturing the writes and draining the queue to write to the database.
- C. Amazon ElastiCache to store the writes until the writes are committed to the database.
- D. Amazon DynamoDB with provisioned write throughput up to the anticipated peak write throughput

Answer: B

Explanation: Amazon Simple Queue Service (Amazon SQS) offers a reliable, highly scalable hosted queue for storing messages as they travel between computers. By using Amazon SQS, developers can simply move data between distributed application components performing different tasks, without losing messages or requiring each component to be always available. Amazon SQS makes it easy to build a distributed, decoupled application, working in close conjunction with the Amazon Elastic Compute Cloud (Amazon EC2) and the other AWS infrastructure web services.

What can I do with Amazon SQS?

Amazon SQS is a web service that gives you access to a message queue that can be used to store messages while waiting for a computer to process them. This allows you to quickly build message queuing applications that can be run on any computer on the internet. Since Amazon SQS is highly scalable and you only pay for what you use, you can start small and grow your application as you wish, with no compromise on performance or reliability. This lets you focus on building sophisticated message-based applications, without worrying about how the messages are stored and managed.

You can use Amazon SQS with software applications in various ways. For example, you can: Integrate Amazon SQS with other AWS infrastructure web services to make applications more reliable and flexible.

Use Amazon SQS to create a queue of work where each message is a task that needs to be completed by a process. One or many computers can read tasks from the queue and perform them. Build a microservices architecture, using queues to connect your microservices.

Keep notifications of significant events in a business process in an Amazon SQS queue. Each event can have a corresponding message in a queue, and applications that need to be aware of the event can read and process the messages.

NEW QUESTION 359

Your company is in the process of developing a next generation pet collar that collects biometric information to assist families with promoting healthy lifestyles for

their pets Each collar will push 30kb of biometric data In JSON format every 2 seconds to a collection platform that will process and analyze the data providing health trending information back to the pet owners and veterinarians via a web portal Management has tasked you to architect the collection platform ensuring the following requirements are met.

Provide the ability for real-time analytics of the inbound biometric data Ensure processing of the biometric data is highly durable. Elastic and parallel The results of the analytic processing should be persisted for data mining

Which architecture outlined below will meet the initial requirements for the collection platform?

- A. Utilize S3 to collect the inbound sensor data analyze the data from S3 with a daily scheduled Data Pipeline and save the results to a Redshift Cluster.
- B. Utilize Amazon Kinesis to collect the inbound sensor data, analyze the data with Kinesis clients and save the results to a Red shift cluster using EMR.
- C. Utilize SQS to collect the inbound sensor data analyze the data from SQS with Amazon Kinesis and save the results to a Microsoft SQL Server RDS instance.
- D. Utilize EMR to collect the inbound sensor data, analyze the data from S3 with Amazon Kinesis and save the results to Dynamo DB.

Answer: B

NEW QUESTION 362

You need a persistent and durable storage to trace call activity of an IVR (Interactive Voice Response) system. Call duration is mostly in the 2-3 minutes timeframe. Each traced call can be either active or terminated. An external application needs to know each minute the list of currently active calls, which are usually a few calls/second. Put once per month there is a periodic peak up to 1000 calls/second for a few hours. The system is open 24/7 and any downtime should be avoided.

Historical data is periodically archived to files. Cost saving is a priority for this project.

What database implementation would better fit this scenario, keeping costs as low as possible?

- A. Use RDS Multi-AZ with two tables, one for "Active calls" and one for "Terminated calls". In this way the "Active calls" table is always small and effective to access.
- B. Use DynamoDB with a "Calls" table and a Global Secondary Index on a "IsActive" attribute that is present for active calls only In this way the Global Secondary index is sparse and more effective.
- C. Use DynamoDB with a "Calls" table and a Global secondary index on a "State" attribute that can equal to "active" or "terminated" in this way the Global Secondary index can be used for all items in the table.
- D. Use RDS Multi-AZ with a "CALLS" table and an Indexed "STATE" field that can be equal to "ACTIVE" or "TERMINATED" In this way the SQL query is optimized by the use of the Index.

Answer: A

NEW QUESTION 365

A web design company currently runs several FTP servers that their 250 customers use to upload and download large graphic files They wish to move this system to AWS to make it more scalable, but they wish to maintain customer privacy and Keep costs to a minimum.


What AWS architecture would you recommend?

- A. ASK their customers to use an S3 client instead of an FTP client
- B. Create a single S3 bucket Create an IAM user for each customer Put the IAM Users in a Group that has an IAM policy that permits access to sub-directories within the bucket via use of the 'username' Policy variable.
- C. Create a single S3 bucket with Reduced Redundancy Storage turned on and ask their customers to use an S3 client instead of an FTP client Create a bucket for each customer with a Bucket Policy that permits access only to that one customer.
- D. Create an auto-scaling group of FTP servers with a scaling policy to automatically scale-in when minimum network traffic on the auto-scaling group is below a given threshold
- E. Load a central list of ftp users from S3 as part of the user Data startup script on each Instance.
- F. Create a single S3 bucket with Requester Pays turned on and ask their customers to use an S3 client instead of an FTP client Create a bucket for each customer with a Bucket Policy that permits access only to that one customer.

Answer: A

NEW QUESTION 369

Refer to the architecture diagram above of a batch processing solution using Simple Queue Service (SQS) to set up a message queue between EC2 instances which are used as batch processors Cloud Watch monitors the number of Job requests (queued messages) and an Auto Scaling group adds or deletes batch processors automatically based on parameters set in Cloud Watch alarms. You can use this architecture to implement which of the following features in a cost effective and efficient manner?

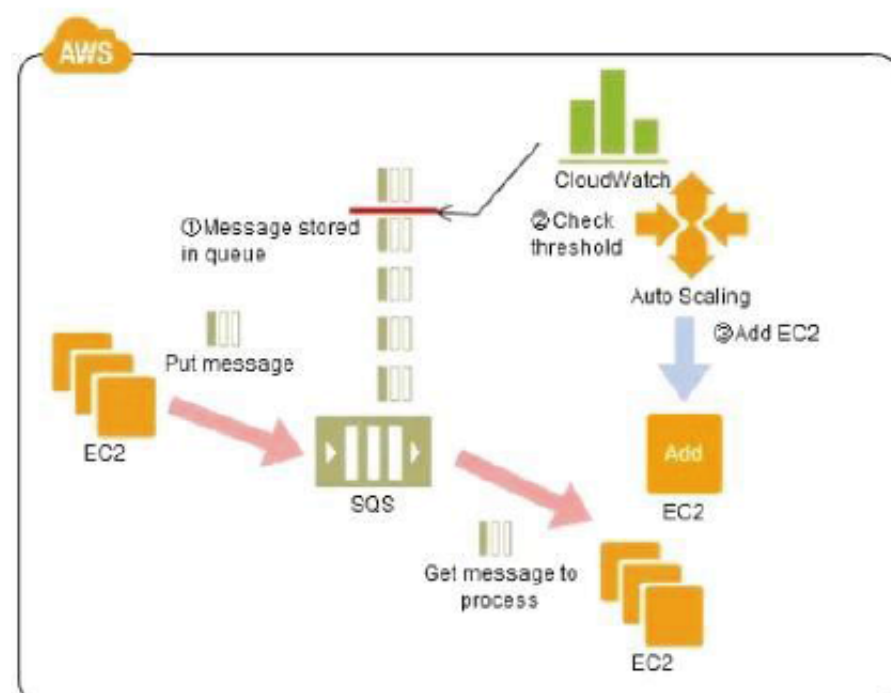

- A. Reduce the overall time for executing jobs through parallel processing by allowing a busy EC2 instance that receives a message to pass it to the next instance in a daisy-chain setup.

- B. Implement fault tolerance against EC2 instance failure since messages would remain in SQS and work can continue with recovery of EC2 instances implement fault tolerance against SQS failure by backing up messages to S3.
- C. Implement message passing between EC2 instances within a batch by exchanging messages through SQS.
- D. Coordinate number of EC2 instances with number of job requests automatically thus improving cost effectiveness.
- E. Handle high priority jobs before lower priority jobs by assigning a priority metadata field to SQS messages.

Answer: D

Explanation: Reference:

There are cases where a large number of batch jobs may need processing, and where the jobs may need to be re-prioritized.

For example, one such case is one where there are differences between different levels of services for unpaid users versus subscriber users (such as the time until publication) in services enabling, for example, presentation files to be uploaded for publication from a web browser. When the user uploads a presentation file, the conversion processes, for example, for publication are performed as batch processes on the system side, and the file is published after the conversion. Is it then necessary to be able to assign the level of priority to the batch processes for each type of subscriber.

Explanation of the Cloud Solution/Pattern

A queue is used in controlling batch jobs. The queue need only be provided with priority numbers. Job requests are controlled by the queue, and the job requests in the queue are processed by a batch server. In Cloud computing, a highly reliable queue is provided as a service, which you can use to structure a highly reliable batch system with ease. You may prepare multiple queues depending on priority levels, with job requests put into the queues depending on their priority levels, to apply prioritization to batch processes. The performance (number) of batch servers corresponding to a queue must be in accordance with the priority level thereof.

Implementation

In AWS, the queue service is the Simple Queue Service (SQS). Multiple SQS queues may be prepared to prepare queues for individual priority levels (with a priority queue and a secondary queue).

Moreover, you may also use the message Delayed Send function to delay process execution. Use SQS to prepare multiple queues for the individual priority levels. Place those processes to be executed immediately (job requests) in the high priority queue. Prepare numbers of batch servers, for processing the job requests of the queues, depending on the priority levels.

Queues have a message "Delayed Send" function. You can use this to delay the time for starting a process.

Configuration

Benefits

You can increase or decrease the number of servers for processing jobs to change automatically the processing speeds of the priority queues and secondary queues.

You can handle performance and service requirements through merely increasing or decreasing the number of EC2 instances used in job processing.

Even if an EC2 were to fail, the messages (jobs) would remain in the queue service, enabling processing to be continued immediately upon recovery of the EC2 instance, producing a system that is robust to failure.

Cautions

Depending on the balance between the number of EC2 instances for performing the processes and the number of messages that are queued, there may be cases where processing in the secondary queue may be completed first, so you need to monitor the processing speeds in the primary queue and the secondary queue.

NEW QUESTION 373

Your company currently has a 2-tier web application running in an on-premises data center. You have experienced several infrastructure failures in the past two months resulting in significant financial losses. Your CIO is strongly agreeing to move the application to AWS. While working on achieving buy-in from the other company executives, he asks you to develop a disaster recovery plan to help improve Business continuity in the short term. He specifies a target Recovery Time Objective (RTO) of 4 hours and a Recovery Point Objective (RPO) of 1 hour or less. He also asks you to implement the solution within 2 weeks. Your database is 200GB in size and you have a 20Mbps Internet connection.

How would you do this while minimizing costs?

- A. Create an EBS backed private AMI which includes a fresh install of your application
- B. Develop a CloudFormation template which includes your AMI and the required EC2, AutoScaling, and ELB resources to support deploying the application across Multiple- Availability-Zone
- C. Asynchronously replicate transactions from your on-premises database to a database instance in AWS across a secure VPN connection.
- D. Deploy your application on EC2 instances within an Auto Scaling group across multiple availability zone
- E. Asynchronously replicate transactions from your on-premises database to a database instance in AWS across a secure VPN connection.
- F. Create an EBS backed private AMI which includes a fresh install of your application
- G. Setup a script in your data center to backup the local database every 1 hour and to encrypt and copy the resulting file to an S3 bucket using multi-part upload.
- H. Install your application on a compute-optimized EC2 instance capable of supporting the application's average load
- I. Synchronously replicate transactions from your on-premises database to a database instance in AWS across a secure Direct Connect connection.

Answer: A

Explanation: Overview of Creating Amazon EBS-Backed AMIs

First, launch an instance from an AMI that's similar to the AMI that you'd like to create. You can connect to your instance and customize it. When the instance is configured correctly, ensure data integrity by

stopping the instance before you create an AMI, then create the image. When you create an Amazon EBS-backed AMI, we automatically register it for you.

Amazon EC2 powers down the instance before creating the AMI to ensure that everything on the instance is stopped and in a consistent state during the creation process. If you're confident that your instance is in a consistent state appropriate for AMI creation, you can tell Amazon EC2 not to power down and reboot the instance. Some file systems, such as XFS, can freeze and unfreeze activity, making it safe to create the image without rebooting the instance.

During the AMI-creation process, Amazon EC2 creates snapshots of your instance's root volume and any other EBS volumes attached to your instance. If any volumes attached to the instance are encrypted, the new AMI only launches successfully on instances that support Amazon EBS encryption. For more information, see Amazon EBS Encryption.

Depending on the size of the volumes, it can take several minutes for the AMI-creation process to complete (sometimes up to 24 hours). You may find it more efficient to create snapshots of your volumes prior to creating your AMI. This way, only small, incremental snapshots need to be created when the AMI is created, and the process completes more quickly (the total time for snapshot creation remains the same). For more information, see Creating an Amazon EBS Snapshot. After the process completes, you have a new AMI and snapshot created from the root volume of the instance. When you launch an instance using the new AMI, we create a new EBS volume for its root volume using the snapshot. Both the AMI and the snapshot incur charges to your account until you delete them. For more information, see Deregistering Your AMI.

If you add instance-store volumes or EBS volumes to your instance in addition to the root device volume, the block device mapping for the new AMI contains information for these volumes, and the block device mappings for instances that you launch from the new AMI automatically contain information for these volumes. The instance-store volumes specified in the block device mapping for the new instance are new and don't contain any data from the instance store volumes of the instance you used to create the AMI. The data on EBS volumes persists. For more information, see Block Device Mapping.

NEW QUESTION 378

Your startup wants to implement an order fulfillment process for selling a personalized gadget that needs an average of 3-4 days to produce with some orders taking up to 6 months you expect 10 orders per day on your first day. 1000 orders per day after 6 months and 10,000 orders after 12 months. Orders coming in are checked for consistency then dispatched to your manufacturing plant for production quality control packaging shipment and payment processing. If the product does not meet the quality standards at any stage of the process employees may force the process to repeat a step. Customers are notified via email about order status and any critical issues with their orders such as payment failure. Your case architecture includes AWS Elastic Beanstalk for your website with an RDS MySQL instance for customer data and orders. How can you implement the order fulfillment process while making sure that the emails are delivered reliably?

- A. Add a business process management application to your Elastic Beanstalk app servers and re-use the RDS database for tracking order status use one of the Elastic Beanstalk instances to send emails to customers.
- B. Use SWF with an Auto Scaling group of actMty workers and a decider instance in another Auto Scaling group with min/max=1 Use the decider instance to send emails to customers.
- C. Use SWF with an Auto Scaling group of actMty workers and a decider instance in another Auto Scaling group with min/max=1 use SES to send emails to customers.
- D. Use an SQS queue to manage all process tasks Use an Auto Scaling group of EC2 Instances that poll the tasks and execute the
- E. Use SES to send emails to customers.

Answer: C

NEW QUESTION 383

You have deployed a web application targeting a global audience across multiple AWS Regions under the domain name.example.com. You decide to use Route53 Latency-Based Routing to serve web requests to users from the region closest to the user. To provide business continuity in the event of server downtime you configure weighted record sets associated with two web servers in separate Availability Zones per region. During a DR test you notice that when you disable all web servers in one of the regions Route53 does not automatically direct all users to the other region. What could be happening? (Choose 2 answers)

- A. Latency resource record sets cannot be used in combination with weighted resource record sets.
- B. You did not setup an HTTP health check for one or more of the weighted resource record sets associated with the disabled web servers.
- C. The value of the weight associated with the latency alias resource record set in the region with the disabled servers is higher than the weight for the other region.
- D. One of the two working web servers in the other region did not pass its HTTP health check.
- E. You did not set "Evaluate Target Health" to "Yes" on the latency alias resource record set associated with example.com in the region where you disabled the servers.

Answer: BE

Explanation: How Health Checks Work in Complex Amazon Route 53 Configurations

Checking the health of resources in complex configurations works much the same way as in simple configurations. However, in complex configurations, you use a combination of alias resource record sets (including weighted alias, latency alias, and failover alias) and nonalias resource record sets to build a decision tree that gives you greater control over how Amazon Route 53 responds to requests.

For more information, see [How Health Checks Work in Simple Amazon Route 53 Configurations](#).

For example, you might use latency alias resource record sets to select a region close to a user and use weighted resource record sets for two or more resources within each region to protect against the failure of a single endpoint or an Availability Zone. The following diagram shows this configuration.

Here's how Amazon EC2 and Amazon Route 53 are configured:

You have Amazon EC2 instances in two regions, us-east-1 and ap-southeast-2. You want Amazon Route 53 to respond to queries by using the resource record sets in the region that provides the lowest latency for your customers, so you create a latency alias resource record set for each region.

(You create the latency alias resource record sets after you create resource record sets for the individual Amazon EC2 instances.)

Within each region, you have two Amazon EC2 instances. You create a weighted resource record set for each instance. The name and the type are the same for both of the weighted resource record sets in each region.

When you have multiple resources in a region, you can create weighted or failover resource record sets for your resources. You can also create even more complex configurations by creating weighted alias or failover alias resource record sets that, in turn, refer to multiple resources.

Each weighted resource record set has an associated health check. The IP address for each health check matches the IP address for the corresponding resource record set. This isn't required, but it's the most common configuration.

For both latency alias resource record sets, you set the value of Evaluate Target Health to Yes.

You use the Evaluate Target Health setting for each latency alias resource record set to make Amazon Route 53 evaluate the health of the alias targets-the weighted resource record sets-and respond accordingly.

The preceding diagram illustrates the following sequence of events:

Amazon Route 53 receives a query for example.com. Based on the latency for the user making the request, Amazon Route 53 selects the latency alias resource record set for the us-east-1 region.

Amazon Route 53 selects a weighted resource record set based on weight. Evaluate Target Health is Yes for the latency alias resource record set, so Amazon Route 53 checks the health of the selected weighted resource record set.

The health check failed, so Amazon Route 53 chooses another weighted resource record set based on weight and checks its health. That resource record set also is unhealthy.

Amazon Route 53 backs out of that branch of the tree, looks for the latency alias resource record set with the next-best latency, and chooses the resource record set for ap-southeast-2.

Amazon Route 53 again selects a resource record set based on weight, and then checks the health of the selected resource record set. The health check passed, so Amazon Route 53 returns the applicable value in response to the query.

What Happens When You Associate a Health Check with an Alias Resource Record Set?

You can associate a health check with an alias resource record set instead of or in addition to setting the value of Evaluate Target Health to Yes. However, it's generally more useful if Amazon Route 53 responds to queries based on the health of the underlying resources- the HTTP servers, database servers, and other resources that your alias resource record sets refer to. For example, suppose the following configuration:

You assign a health check to a latency alias resource record set for which the alias target is a group of weighted resource record sets.

You set the value of Evaluate Target Health to Yes for the latency alias resource record set.

In this configuration, both of the following must be true before Amazon Route 53 will return the applicable value for a weighted resource record set:

The health check associated with the latency alias resource record set must pass.

At least one weighted resource record set must be considered healthy, either because it's associated with a health check that passes or because it's not associated with a health check. In the latter case, Amazon Route 53 always considers the weighted resource record set healthy.

If the health check for the latency alias resource record set fails, Amazon Route 53 stops responding to queries using any of the weighted resource record sets in the alias target, even if they're all healthy. Amazon Route 53 doesn't know the status of the weighted resource record sets because it never looks past the failed health check on the alias resource record set.

What Happens When You Omit Health Checks?

In a complex configuration, it's important to associate health checks with all of the non-alias resource record sets. Let's return to the preceding example, but assume that a health check is missing on one of the weighted resource record sets in the us-east-1 region:
Here's what happens when you omit a health check on a non-alias resource record set in this configuration:
Amazon Route 53 receives a query for example.com. Based on the latency for the user making the request, Amazon Route 53 selects the latency alias resource record set for the us-east-1 region.
Amazon Route 53 looks up the alias target for the latency alias resource record set, and checks the status of the corresponding health checks. The health check for one weighted resource record set failed, so that resource record set is omitted from consideration.
The other weighted resource record set in the alias target for the us-east-1 region has no health check. The corresponding resource might or might not be healthy, but without a health check, Amazon Route 53 has no way to know. Amazon Route 53 assumes that the resource is healthy and returns the applicable value in response to the query.
What Happens When You Set Evaluate Target Health to No?
In general, you also want to set Evaluate Target Health to Yes for all of the alias resource record sets. In the following example, all of the weighted resource record sets have associated health checks, but Evaluate Target Health is set to No for the latency alias resource record set for the us-east-1 region:
Here's what happens when you set Evaluate Target Health to No for an alias resource record set in this configuration:
Amazon Route 53 receives a query for example.com. Based on the latency for the user making the request, Amazon Route 53 selects the latency alias resource record set for the us-east-1 region.
Amazon Route 53 determines what the alias target is for the latency alias resource record set, and checks the corresponding health checks. They're both failing. Because the value of Evaluate Target Health is No for the latency alias resource record set for the us-east-1 region, Amazon Route 53 must choose one resource record set in this branch instead of backing out of the branch and looking for a healthy resource record set in the ap-southeast-2 region.

NEW QUESTION 388

Your company previously configured a heavily used, dynamically routed VPN connection between your on-premises data center and AWS. You recently provisioned a DirectConnect connection and would like to start using the new connection. After configuring DirectConnect settings in the AWS Console, which of the following options will provide the most seamless transition for your users?

- A. Delete your existing VPN connection to avoid routing loops configure your DirectConnect router with the appropriate settings and verify network traffic is leveraging DirectConnect.
- B. Configure your DirectConnect router with a higher BGP priority than your VPN router, verify network traffic is leveraging DirectConnect and then delete your existing VPN connection.
- C. Update your VPC route tables to point to the DirectConnect connection configure your DirectConnect router with the appropriate settings verify network traffic is leveraging DirectConnect and then delete the VPN connection.
- D. Configure your DirectConnect router, update your VPC route tables to point to the DirectConnect connection, configure your VPN connection with a higher BGP point
- E. And verify network traffic is leveraging the DirectConnect connection.

Answer: D

NEW QUESTION 393

A web company is looking to implement an external payment service into their highly available application deployed in a VPC. Their application EC2 instances are behind a public-facing ELB. Auto scaling is used to add additional instances as traffic increases. Under normal load, the application runs 2 instances in the Auto Scaling group, but at peak it can scale 3x in size. The application instances need to communicate with the payment service over the Internet, which requires whitelisting of all public IP addresses used to communicate with it. A maximum of 4 whitelisting IP addresses are allowed at a time and can be added through an API.
How should they architect their solution?

- A. Route payment requests through two NAT instances setup for High Availability and whitelist the Elastic IP addresses attached to the EC2 instances.
- B. Whitelist the VPC Internet Gateway public IP and route payment requests through the Internet Gateway.
- C. Whitelist the ELB IP addresses and route payment requests from the application servers through the ELB.
- D. Automatically assign public IP addresses to the application instances in the Auto Scaling group and run a script on boot that adds each instance's public IP address to the payment validation whitelist API.

Answer: D

NEW QUESTION 394

You are designing the network infrastructure for an application server in Amazon VPC. Users will access all the application instances from the Internet as well as from an on-premises network. The on-premises network is connected to your VPC over an AWS Direct Connect link.
How would you design routing to meet the above requirements?

- A. Configure a single routing table with a default route via the Internet gateway. Propagate a default route via BGP on the AWS Direct Connect customer router.
- B. Associate the routing table with all VPC subnets.
- C. Configure a single routing table with a default route via the Internet gateway. Propagate specific routes for the on-premises networks via BGP on the AWS Direct Connect customer router. Associate the routing table with all VPC subnets.
- D. Configure a single routing table with two default routes: one to the Internet via an Internet gateway, the other to the on-premises network via the VPN gateway. Use this routing table across all subnets in your VPC.
- E. Configure two routing tables: one that has a default route via the Internet gateway and another that has a default route via the VPN gateway. Associate both routing tables with each VPC subnet.

Answer: A

NEW QUESTION 397

You've been brought in as solutions architect to assist an enterprise customer with their migration of an e-commerce platform to Amazon Virtual Private Cloud (VPC). The previous architect has already deployed a 3-tier VPC. The configuration is as follows:
VPC: vpc-2f8bc447 IGW: igw-2d8bc445 NACL: acl-208bc448
Subnets and Route Tables: Web servers: subnet-258bc44d
Application servers: subnet-248bc44c Database servers: subnet-9189c6f9 Route Tables:
rtb-218bc449 rtb-238bc44b Associations:
subnet-258bc44d : rtb-218bc449 subnet-248bc44c : rtb-238bc44b subnet-9189c6f9 : rtb-238bc44b
You are now ready to begin deploying EC2 instances into the VPC. Web servers must have direct access to the Internet. Application and database servers cannot

have direct access to the internet.

Which configuration below will allow you the ability to remotely administer your application and database servers, as well as allow these servers to retrieve updates from the Internet?

- A. Create a bastion and NAT instance in subnet-258bc44d, and add a route from rtb- 238bc44b to the NAT instance.
- B. Add a route from rtb-238bc44b to igw-2d8bc445 and add a bastion and NAT instance within subnet-248bc44c.
- C. Create a bastion and NAT instance in subnet-248bc44c, and add a route from rtb- 238bc44b to subnet-258bc44d.
- D. Create a bastion and NAT instance in subnet-258bc44d, add a route from rtb-238bc44b to igw- 2d8bc445, and a new NACL that allows access between subnet-258bc44d and subnet -248bc44c.

Answer: A

NEW QUESTION 399

You are migrating a legacy client-server application to AWS. The application responds to a specific DNS domain (e.g. www.example.com) and has a 2-tier architecture, with multiple application servers and a database server. Remote clients use TCP to connect to the application servers. The application servers need to know the IP address of the clients in order to function properly and are currently taking that information from the TCP socket. A Multi-AZ RDS MySQL instance will be used for the database. During the migration you can change the application code, but you have to file a change request. How would you implement the architecture on AWS in order to maximize scalability and high availability?

- A. File a change request to implement Alias Resource support in the application
- B. Use Route 53 Alias Resource Record to distribute load on two application servers in different AZs.
- C. File a change request to implement Latency Based Routing support in the application
- D. Use Route 53 with Latency Based Routing enabled to distribute load on two application servers in different AZs.
- E. File a change request to implement Cross-Zone support in the application
- F. Use an ELB with a TCP Listener and Cross-Zone Load Balancing enabled, two application servers in different AZs.
- G. File a change request to implement Proxy Protocol support in the application
- H. Use an ELB with a TCP Listener and Proxy Protocol enabled to distribute load on two application servers in different AZs.

Answer: D

NEW QUESTION 401

You require the ability to analyze a large amount of data, which is stored on Amazon S3 using Amazon Elastic Map Reduce. You are using the cc2 8x large Instance type, whose CPUs are mostly idle during processing. Which of the below would be the most cost efficient way to reduce the runtime of the job?

- A. Create more smaller files on Amazon S3.
- B. Add additional cc2 8x large instances by introducing a task group.
- C. Use smaller instances that have higher aggregate I/O performance.
- D. Create fewer, larger files on Amazon S3.

Answer: C

NEW QUESTION 403

Your department creates regular analytics reports from your company's log files. All log data is collected in Amazon S3 and processed by daily Amazon Elastic MapReduce (EMR) jobs that generate daily PDF reports and aggregated tables in CSV format for an Amazon Redshift data warehouse.

Your CFO requests that you optimize the cost structure for this system.

Which of the following alternatives will lower costs without compromising average performance of the system or data integrity for the raw data?

- A. Use reduced redundancy storage (RRS) for all data in S3. Use a combination of Spot Instances and Reserved Instances for Amazon EMR job
- B. Use Reserved Instances for Amazon Redshift.
- C. Use reduced redundancy storage (RRS) for PDF and .csv data in S3. Add Spot Instances to EMR job
- D. Use Spot Instances for Amazon Redshift.
- E. Use reduced redundancy storage (RRS) for PDF and .csv data in Amazon S3. Add Spot Instances to Amazon EMR job
- F. Use Reserved Instances for Amazon Redshift.
- G. Use reduced redundancy storage (RRS) for all data in Amazon S3. Add Spot Instances to Amazon EMR job
- H. Use Reserved Instances for Amazon Redshift.

Answer: C

Explanation: Using Reduced Redundancy Storage

Amazon S3 stores objects according to their storage class. It assigns the storage class to an object when it is written to Amazon S3. You can assign objects a specific storage class (standard or reduced redundancy) only when you write the objects to an Amazon S3 bucket or when you copy objects that are already stored in Amazon S3. Standard is the default storage class. For information about storage classes, see Object Key and Metadata.

In order to reduce storage costs, you can use reduced redundancy storage for noncritical, reproducible data at lower levels of redundancy than Amazon S3 provides with standard storage. The lower level of redundancy results in less durability and availability, but in many cases, the lower costs can make reduced redundancy storage an acceptable storage solution. For example, it can be a cost effective solution for sharing media content that is durably stored elsewhere. It can also make sense if you are storing thumbnails and other resized images that can be easily reproduced from an original image. Reduced redundancy storage is designed to provide 99.99% durability of objects over a given year.

This durability level corresponds to an average annual expected loss of 0.01% of objects. For example, if you store 10,000 objects using the RRS option, you can, on average, expect to incur an annual loss of a single object per year (0.01% of 10,000 objects).

Note

This annual loss represents an expected average and does not guarantee the loss of less than 0.01% of objects in a given year.

Reduced redundancy storage stores objects on multiple devices across multiple facilities, providing 400 times the durability of a typical disk drive, but it does not replicate objects as many times as Amazon S3 standard storage. In addition, reduced redundancy storage is designed to sustain the loss of data in a single facility. If an object in reduced redundancy storage has been lost, Amazon S3 will return a 405 error on requests made to that object. Amazon S3 also offers notifications for reduced redundancy storage object loss: you can configure your bucket so that when Amazon S3 detects the loss of an RRS object, a notification will be sent through Amazon Simple Notification Service (Amazon SNS). You can then replace the lost object. To enable notifications, you can use the Amazon S3 console to set the Notifications property of your bucket.

NEW QUESTION 407

You've been hired to enhance the overall security posture for a very large e-commerce site. They have a well architected multi-tier application running in a VPC that uses ELBs in front of both the web and the app tier with static assets served directly from S3. They are using a combination of RDS and DynamoDB for their dynamic data and then archive nightly into S3 for further processing with EMR. They are concerned because they found suspicious log entries and suspect someone is attempting to gain unauthorized access. Which approach provides a cost effective scalable mitigation to this kind of attack?

- A. Recommend that they lease space at a DirectConnect partner location and establish a DirectConnect connection to their VPC. They would then establish Internet connectivity into their space, filter the traffic in hardware Web Application Firewall (WAF). And then pass the traffic through the DirectConnect connection into their application running in their VPC.
- B. Add previously identified hostile source IPs as an explicit INBOUND DENY NACL to the web tier sub net.
- C. Add a WAF tier by creating a new ELB and an AutoScaling group of EC2 Instances running a host based WAF. They would redirect Route 53 to resolve to the new WAF tier ELB. The WAF tier would then pass the traffic to the current web tier. The web tier Security Groups would be updated to only allow traffic from the WAF tier Security Group.
- D. Remove all but TLS 1.2 from the web tier ELB and enable Advanced Protocol Filtering. This will enable the ELB itself to perform WAF functionality.

Answer: C

NEW QUESTION 408

You currently operate a web application in the AWS US-East region. The application runs on an autoscaled layer of EC2 instances and an RDS Multi-AZ database. Your IT security compliance officer has tasked you to develop a reliable and durable logging solution to track changes made to your EC2, IAM and RDS resources. The solution must ensure the integrity and confidentiality of your log data. Which of these solutions would you recommend?

- A. Create a new CloudTrail trail with one new S3 bucket to store the logs and with the global services option selected. Use IAM roles, S3 bucket policies and Multi Factor Authentication (MFA). Delete on the S3 bucket that stores your logs.
- B. Create a new CloudTrail with one new S3 bucket to store the logs. Configure SNS to send log file delivery notifications to your management system. Use IAM roles and S3 bucket policies on the S3 bucket that stores your logs.
- C. Create a new CloudTrail trail with an existing S3 bucket to store the logs and with the global services option selected. Use S3 ACLs and Multi Factor Authentication (MFA). Delete on the S3 bucket that stores your logs.
- D. Create three new CloudTrail trails with three new S3 buckets to store the logs: one for the AWS Management console, one for AWS SDKs and one for command line tools. Use IAM roles and S3 bucket policies on the S3 buckets that store your logs.

Answer: A

NEW QUESTION 409

You are designing a data leak prevention solution for your VPC environment. You want your VPC instances to be able to access software depots and distributions on the Internet for product updates. The depots and distributions are accessible via third party CDNs by their URLs. You want to explicitly deny any other outbound connections from your VPC instances to hosts on the Internet. Which of the following options would you consider?

- A. Configure a web proxy server in your VPC and enforce URL-based rules for outbound access. Remove default routes.
- B. Implement security groups and configure outbound rules to only permit traffic to software depots.
- C. Move all your instances into private VPC subnets, remove default routes from all routing tables and add specific routes to the software depots and distributions only.
- D. Implement network access control lists to all specific destinations, with an implicit deny as a rule.

Answer: A

NEW QUESTION 413

An administrator is using Amazon CloudFormation to deploy a three tier web application that consists of a web tier and application tier that will utilize Amazon DynamoDB for storage. When creating the CloudFormation template, which of the following would allow the application instance access to the DynamoDB tables without exposing API credentials?

- A. Create an Identity and Access Management Role that has the required permissions to read and write from the required DynamoDB table and associate the Role to the application instances by referencing an instance profile.
- B. Use the Parameter section in the CloudFormation template to have the user input Access and Secret Keys from an already created IAM user that has the permissions required to read and write from the required DynamoDB table.
- C. Create an Identity and Access Management Role that has the required permissions to read and write from the required DynamoDB table and reference the Role in the instance profile property of the application instance.
- D. Create an identity and Access Management user in the CloudFormation template that has permissions to read and write from the required DynamoDB table, use the GetAtt function to retrieve the Access and secret keys and pass them to the application instance through user-data.

Answer: C

NEW QUESTION 414

You are designing a connectivity solution between on-premises infrastructure and Amazon VPC. Your server's on-premises will be communicating with your VPC instances. You will be establishing IPsec tunnels over the Internet. You will be using VPN gateways and terminating the IPsec tunnels on AWS supported customer gateways.

Which of the following objectives would you achieve by implementing an IPsec tunnel as outlined above? (Choose 4 answers)

- A. End-to-end protection of data in transit
- B. End-to-end Identity authentication
- C. Data encryption across the Internet
- D. Protection of data in transit over the Internet
- E. Peer identity authentication between VPN gateway and customer gateway
- F. Data integrity protection across the Internet

Answer: CEF

NEW QUESTION 417

You are designing an intrusion detection prevention (IDS/IPS) solution for a customer web application in a single VPC. You are considering the options for implementing IOS IPS protection for traffic coming from the Internet.

Which of the following options would you consider? (Choose 2 answers)

- A. Implement IDS/IPS agents on each Instance running In VPC
- B. Configure an instance in each subnet to switch its network interface card to promiscuous mode and analyze network traffic.
- C. Implement Elastic Load Balancing with SSL listeners In front of the web applications
- D. Implement a reverse proxy layer in front of web servers and configure IDS/ IPS agents on each reverse proxy server.

Answer: BD

NEW QUESTION 418

You are designing a photo sharing mobile app the application will store all pictures in a single Amazon S3 bucket.

Users will upload pictures from their mobile device directly to Amazon S3 and will be able to view and download their own pictures directly from Amazon S3.

You want to configure security to handle potentially millions of users in the most secure manner possible. What should your server-side application do when a new user registers on the photo sharing mobile application?

- A. Create a set of long-term credentials using AWS Security Token Service with appropriate permissions Store these credentials in the mobile app and use them to access Amazon S3.
- B. Record the user's Information in Amazon RDS and create a role in IAM with appropriate permission
- C. When the user uses their mobile app create temporary credentials using the AWS Security Token Service 'Assume Role' function Store these credentials in the mobile app's memory and use them to access Amazon S3 Generate new credentials the next time the user runs the mobile app.
- D. Record the user's Information In Amazon DynamoDB
- E. When the user uses their mobile app create temporary credentials using AWS Security Token Service with appropriate permissions Store these credentials in the mobile app's memory and use them to access Amazon S3 Generate new credentials the next time the user runs the mobile app.
- F. Create IAM user
- G. Assign appropriate permissions to the IAM user Generate an access key and secret key for the IAM user, store them in the mobile app and use these credentials to access Amazon S3.
- H. Create an IAM user
- I. Update the bucket policy with appropriate permissions for the IAM user Generate an access Key and secret Key for the IAM user, store them In the mobile app and use these credentials to access Amazon S3.

Answer: B

NEW QUESTION 422

You have an application running on an EC2 Instance which will allow users to download files from a private S3 bucket using a pre-assigned URL. Before generating the URL the application should verify the existence of the file in S3.

How should the application use AWS credentials to access the S3 bucket securely?

- A. Use the AWS account access Keys the application retrieves the credentials from the source code of the application.
- B. Create an IAM user for the application with permissions that allow list access to the S3 bucket launch the instance as the IAM user and retrieve the IAM user's credentials from the EC2 instance user data.
- C. Create an IAM role for EC2 that allows list access to objects in the S3 bucket
- D. Launch the instance with the role, and retrieve the role's credentials from the EC2 Instance metadata
- E. Create an IAM user for the application with permissions that allow list access to the S3 bucket
- F. The application retrieves the IAM user credentials from a temporary directory with permissions that allow read access only to the application user.

Answer: C

NEW QUESTION 425

You require the ability to analyze a customer's clickstream data on a website so they can do behavioral analysis. Your customer needs to know what sequence of pages and ads their customer clicked on. This data will be used in real time to modify the page layouts as customers click through the site to increase stickiness and advertising click-through. Which option meets the requirements for capturing and analyzing this data?

- A. Log clicks in weblogs by URL store to Amazon S3, and then analyze with Elastic MapReduce
- B. Push web clicks by session to Amazon Kinesis and analyze behavior using Kinesis workers
- C. Write click events directly to Amazon Redshift and then analyze with SQL
- D. Publish web clicks by session to an Amazon SQS queue then periodically drain these events to Amazon RDS and analyze with SQL

Answer: B

Explanation: Reference: <http://www.slideshare.net/AmazonWebServices/aws-webcast-introduction-to-amazon-kinesis>

NEW QUESTION 429

An AWS customer runs a public blogging website. The site users upload two million blog entries a month. The average blog entry size is 200 KB. The access rate to blog entries drops to negligible 6 months after publication and users rarely access a blog entry 1 year after publication. Additionally, blog entries have a high update rate during the first 3 months following publication, this drops to no updates after 6 months. The customer wants to use CloudFront to improve his user's load times.

Which of the following recommendations would you make to the customer?

- A. Duplicate entries into two different buckets and create two separate CloudFront distributions where S3 access is restricted only to CloudFront identity
- B. Create a CloudFront distribution with "US" Europe price class for US/ Europe users and a different CloudFront distribution with 'All Edge Locations' for the remaining users.
- C. Create a CloudFront distribution with S3 access restricted only to the CloudFront identity and partition the blog entry's location in S3 according to the month it was uploaded to be used with CloudFront behaviors.
- D. Create a CloudFront distribution with Restrict Viewer Access Forward Query string set to true and minimum TTL of 0.

Answer: C

NEW QUESTION 432

Your company is getting ready to do a major public announcement of a social media site on AWS. The website is running on EC2 instances deployed across multiple Availability Zones with a Multi-AZ RDS MySQL Extra Large DB Instance. The site performs a high number of small reads and writes per second and relies on an eventual consistency model. After comprehensive tests you discover that there is read contention on RDS MySQL. Which are the best approaches to meet these requirements? (Choose 2 answers)

- A. Deploy ElasticCache in-memory cache running in each availability zone
- B. Implement sharding to distribute load to multiple RDS MySQL instances
- C. Increase the RDS MySQL Instance size and Implement provisioned IOPS
- D. Add an RDS MySQL read replica in each availability zone

Answer: AC

NEW QUESTION 433

A large real-estate brokerage is exploring the option of adding a cost-effective location based alert to their existing mobile application. The application backend infrastructure currently runs on AWS. Users who opt in to this service will receive alerts on their mobile device regarding real-estate offers in proximity to their location. For the alerts to be relevant, delivery time needs to be in the low minute count. The existing mobile app has 5 million users across the US. Which one of the following architectural suggestions would you make to the customer?

- A. The mobile application will submit its location to a web service endpoint utilizing Elastic Load Balancing and EC2 instances. DynamoDB will be used to store and retrieve relevant offers. EC2 instances will communicate with mobile carriers/device providers to push alerts back to mobile application.
- B. Use AWS DirectConnect or VPN to establish connectivity with mobile carriers. EC2 instances will receive the mobile applications' location through carrier connection. ROS will be used to store and relevant offers. EC2 instances will communicate with mobile carriers to push alerts back to the mobile application.
- C. The mobile application will send device location using SO.
- D. EC2 instances will retrieve the relevant offers from DynamoDB. AWS Mobile Push will be used to send offers to the mobile application.
- E. The mobile application will send device location using AWS Mobile Push. EC2 instances will retrieve the relevant offers from DynamoDB. EC2 instances will communicate with mobile carriers/device providers to push alerts back to the mobile application.

Answer: A

NEW QUESTION 434

You are developing a new mobile application and are considering storing user preferences in AWS. This would provide a more uniform cross-device experience to users using multiple mobile devices to access the application. The preference data for each user is estimated to be 50KB in size. Additionally, 5 million customers are expected to use the application on a regular basis. The solution needs to be cost-effective, highly available, scalable and secure. How would you design a solution to meet the above requirements?

- A. Setup an RDS MySQL instance in 2 availability zones to store the user preference data.
- B. Deploy a public facing application on a server in front of the database to manage security and access credentials.
- C. Setup a DynamoDB table with an item for each user having the necessary attributes to hold the user preference.
- D. The mobile application will query the user preferences directly from the DynamoDB table.
- E. Utilize STS.
- F. Web Identity Federation, and DynamoDB Fine Grained Access Control to authenticate and authorize access.
- G. Setup an RDS MySQL instance with multiple read replicas in 2 availability zones to store the user preference data. The mobile application will query the user preferences from the read replica.
- H. Leverage the MySQL user management and access privilege system to manage security and access credentials.
- I. Store the user preference data in S3. Setup a DynamoDB table with an item for each user and an item attribute pointing to the user's S3 object.
- J. The mobile application will retrieve the S3 URL from DynamoDB and then access the S3 object directly. Utilize STS, Web Identity Federation, and S3 ACLs to authenticate and authorize access.

Answer: B

NEW QUESTION 435

Your team has a Tomcat-based Java application you need to deploy into development, test and production environments. After some research, you opt to use Elastic Beanstalk due to its tight integration with your developer tools and RDS due to its ease of management. Your QA team lead points out that you need to roll a sanitized set of production data into your environment on a nightly basis. Similarly, other software teams in your org want access to that same restored data via their EC2 instances in your VPC. The optimal setup for persistence and security that meets the above requirements would be the following.

- A. Create your RDS instance as part of your Elastic Beanstalk definition and alter its security group to allow access to it from hosts in your application subnets.
- B. Create your RDS instance separately and add its IP address to your application's DB connection strings in your code. Alter its security group to allow access to it from hosts within your VPC's IP address block.
- C. Create your RDS instance separately and pass its DNS name to your app's DB connection string as an environment variable.
- D. Create a security group for client machines and add it as a valid source for DB traffic to the security group of the RDS instance itself.
- E. Create your RDS instance separately and pass its DNS name to your app's DB connection string as an environment variable. Alter its security group to allow access to it from hosts in your application subnets.

Answer: A

NEW QUESTION 438

You are looking to migrate your Development (Dev) and Test environments to AWS. You have decided to use separate AWS accounts to host each environment. You plan to link each account's bill to a Master AWS account using Consolidated Billing. To make sure you keep within budget, you would like to implement a way for administrators in the Master account to have access to stop, delete and/or terminate resources in both the Dev and Test accounts. Identify which option will allow you to achieve this goal.

- A. Create IAM users in the Master account with full Admin permission.

- B. Create cross-account roles in the Dev and Test accounts that grant the Master account access to the resources in the account by inheriting permissions from the Master account.
- C. Create IAM users and a cross-account role in the Master account that grants full Admin permissions to the Dev and Test accounts.
- D. Create IAM users in the Master account Create cross-account roles in the Dev and Test accounts that have full Admin permissions and grant the Master account access.
- E. Link the accounts using Consolidated Billin
- F. This will give IAM users in the Master account access to resources in the Dev and Test accounts

Answer: C

Explanation: Bucket Owner Granting Cross-account Permission to objects It Does Not Own

In this example scenario, you own a bucket and you have enabled other AWS accounts to upload objects. That is, your bucket can have objects that other AWS accounts own.

Now, suppose as a bucket owner, you need to grant cross-account permission on objects, regardless of who the owner is, to a user in another account. For example, that user could be a billing application that needs to access object metadata. There are two core issues:

The bucket owner has no permissions on those objects created by other AWS accounts. So for the bucket owner to grant permissions on objects it does not own, the object owner, the AWS account that created the objects, must first grant permission to the bucket owner. The bucket owner can then delegate those permissions.

Bucket owner account can delegate permissions to users in its own account but it cannot delegate permissions to other AWS accounts, because cross-account delegation is not supported.

In this scenario, the bucket owner can create an AWS Identity and Access Management (IAM) role with permission to access objects, and grant another AWS account permission to assume the role temporarily enabling it to access objects in the bucket.

Background: Cross-Account Permissions and Using IAM Roles

IAM roles enable several scenarios to delegate access to your resources, and cross-account access is

one of the key scenarios. In this example, the bucket owner, Account A, uses an IAM role to temporarily delegate object access cross-account to users in another AWS account, Account C. Each IAM role you create has two policies attached to it:

A trust policy identifying another AWS account that can assume the role.

An access policy defining what permissions-for example, s3:GetObject-are allowed when someone assumes the role. For a list of permissions you can specify in a policy, see Specifying Permissions in a Policy.

The AWS account identified in the trust policy then grants its user permission to assume the role. The user can then do the following to access objects:

Assume the role and, in response, get temporary security credentials. Using the temporary security credentials, access the objects in the bucket.

For more information about IAM roles, go to Roles (Delegation and Federation) in IAM User Guide. The following is a summary of the walkthrough steps:

Account A administrator user attaches a bucket policy granting Account B conditional permission to upload objects.

Account A administrator creates an IAM role, establishing trust with Account C, so users in that account can access Account A. The access policy attached to the role limits what user in Account C can do when the user accesses Account A.

Account B administrator uploads an object to the bucket owned by Account A, granting full-control permission to the bucket owner.

Account C administrator creates a user and attaches a user policy that allows the user to assume the role.

User in Account C first assumes the role, which returns the user temporary security credentials. Using those temporary credentials, the user then accesses objects in the bucket.

For this example, you need three accounts. The following table shows how we refer to these accounts and the administrator users in these accounts. Per IAM guidelines (see About Using an

Administrator User to Create Resources and Grant Permissions) we do not use the account root

credentials in this walkthrough. Instead, you create an administrator user in each account and use those credentials in creating resources and granting them permissions

NEW QUESTION 441

You deployed your company website using Elastic Beanstalk and you enabled log file rotation to S3. An Elastic Map Reduce job is periodically analyzing the logs on S3 to build a usage dashboard that you share with your CIO.

You recently improved overall performance of the website using Cloud Front for dynamic content delivery and your website as the origin.

After this architectural change, the usage dashboard shows that the traffic on your website dropped by an order of magnitude. How do you fix your usage dashboard'?

- A. Enable Cloud Front to deliver access logs to S3 and use them as input of the Elastic Map Reduce job.
- B. Turn on Cloud Trail and use trail log files on S3 as input of the Elastic Map Reduce job
- C. Change your log collection process to use Cloud Watch ELB metrics as input of the Elastic MapReduce job
- D. Use Elastic Beanstalk "Rebuild Environment" option to update log delivery to the Elastic Map Reduce job.
- E. Use Elastic Beanstalk "Restart App server(s)" option to update log delivery to the Elastic Map Reduce job.

Answer: D

NEW QUESTION 443

You are running a successful multitier web application on AWS and your marketing department has asked you to add a reporting tier to the application. The reporting tier will aggregate and publish status reports every 30 minutes from user-generated information that is being stored in your web application's database.

You are currently running a Multi-AZ RDS MySQL instance for the database tier. You also have implemented ElastiCache as a database caching layer between the application tier and database tier. Please select the answer that will allow you to successfully implement the reporting tier with as little impact as possible to your database.

- A. Continually send transaction logs from your master database to an S3 bucket and generate the reports off the S3 bucket using S3 byte range requests.
- B. Generate the reports by querying the synchronously replicated standby RDS MySQL instance maintained through Multi-AZ.
- C. Launch a RDS Read Replica connected to your Multi AZ master database and generate reports by querying the Read Replica.
- D. Generate the reports by querying the ElastiCache database caching tier

Answer: C

Explanation: Amazon RDS allows you to use read replicas with Multi-AZ deployments. In Multi-AZ deployments for MySQL, Oracle, SQL Server, and PostgreSQL, the data in your primary DB Instance is synchronously replicated to a standby instance in a different Availability Zone (AZ). Because of their synchronous replication, Multi-AZ deployments for these engines offer greater data durability benefits than do read replicas. (In all Amazon RDS for Aurora deployments, your data is automatically replicated across 3 Availability Zones.)

You can use Multi-AZ deployments and read replicas in conjunction to enjoy the complementary benefits of each. You can simply specify that a given Multi-AZ deployment is the source DB Instance for your Read replicas. That way you gain both the data durability and availability benefits of Multi-AZ deployments and the

read scaling benefits of read replicas.

Note that for Multi-AZ deployments, you have the option to create your read replica in an AZ other than that of the primary and the standby for even more redundancy. You can identify the AZ corresponding to your standby by looking at the "Secondary Zone" field of your DB Instance in the AWS Management Console.

NEW QUESTION 446

A web company is looking to implement an intrusion detection and prevention system into their deployed VPC. This platform should have the ability to scale to thousands of instances running inside of the VPC, How should they architect their solution to achieve these goals?

- A. Configure an instance with monitoring software and the elastic network interface (ENI) set to promiscuous mode packet sniffing to see an traffic across the VPC,
- B. Create a second VPC and route all traffic from the primary application VPC through the second VPC where the scalable virtualized IDS/IPS platform resides.
- C. Configure servers running in the VPC using the host-based 'route' commands to send all traffic through the platform to a scalable virtualized IDS/IPS.
- D. Configure each host with an agent that collects all network traffic and sends that traffic to the IDS/IPS platform for inspection.

Answer: C

NEW QUESTION 448

A web-startup runs its very successful social news application on Amazon EC2 with an Elastic Load Balancer, an Auto-Scaling group of Java/Tomcat application-servers, and DynamoDB as data store. The main web-application best runs on m2 x large instances since it is highly memory- bound Each new deployment requires semi-automated creation and testing of a new AM for the application servers which takes quite a while and is therefore only done once per week. Recently, a new chat feature has been implemented in nodejs and wails to be integrated in the architecture. First tests show that the new component is CPU bound Because the company has some experience with using Chef, they decided to streamline the deployment process and use AWS Ops Works as an application life cycle tool to simplify management of the application and reduce the deployment cycles.

What configuration in AWS Ops Works is necessary to integrate the new chat module in the most cost-efficient and flexible way?

- A. Create one AWS OpsWorks stack, create one AWS Ops Works layer, create one custom recipe
- B. Create one AWS OpsWorks stack create two AWS Ops Works layers create one custom recipe
- C. Create two AWS OpsWorks stacks create two AWS Ops Works layers create one custom recipe
- D. Create two AWS OpsWorks stacks create two AWS Ops Works layers create two custom recipe

Answer: C

NEW QUESTION 451

Your firm has uploaded a large amount of aerial image data to S3 In the past, in your on-premises environment, you used a dedicated group of servers to process this data and used Rabbit MQ an open source messaging system to get job information to the servers. Once processed the data would go to tape and be shipped offsite. Your manager told you to stay with the current design, and leverage AWS archival storage and messaging services to minimize cost. Which is correct?

- A. Use SNS for passing job messages use Cloud Watch alarms to terminate EC2 worker instances when they become idle
- B. Once data is processed, change the storage class of the S3 objects to Reduced Redundancy Storage.
- C. Setup Auto-Scaled workers triggered by queue depth that use spot instances to process messages in SNS Once data is processed,
- D. Change the storage class of the S3 objects to Reduced Redundancy Storage
- E. Setup Auto-Scaled workers triggered by queue depth that use spot instances to process messages in SNS Once data is processed, change the storage class of the S3 objects to Glacier.
- F. Use SNS to pass job messages use Cloud Watch alarms to terminate spot worker instances when they become idle
- G. Once data is processed, change the storage class of the S3 object to Glacier.

Answer: D

NEW QUESTION 453

Before I delete an EBS volume, what can I do if I want to recreate the volume later?

- A. Create a copy of the EBS volume (not a snapshot)
- B. Store a snapshot of the volume
- C. Download the content to an EC2 instance
- D. Back up the data in to a physical disk

Answer: B

NEW QUESTION 458

Select the most correct

The device name /dev/sdal (within Amazon EC2) is __

- A. Possible for EBS volumes
- B. Reserved for the root device
- C. Recommended for EBS volumes
- D. Recommended for instance store volumes

Answer: B

NEW QUESTION 461

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

AWS-Solution-Architect-Associate Practice Exam Features:

- * AWS-Solution-Architect-Associate Questions and Answers Updated Frequently
- * AWS-Solution-Architect-Associate Practice Questions Verified by Expert Senior Certified Staff
- * AWS-Solution-Architect-Associate Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * AWS-Solution-Architect-Associate Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The AWS-Solution-Architect-Associate Practice Test Here](#)