



Google

Exam Questions Associate-Cloud-Engineer

Google Cloud Certified - Associate Cloud Engineer

NEW QUESTION 1

Your organization uses G Suite for communication and collaboration. All users in your organization have a G Suite account. You want to grant some G Suite users access to your Cloud Platform project. What should you do?

- A. Enable Cloud Identity in the GCP Console for your domain.
- B. Grant them the required IAM roles using their G Suite email address.
- C. Create a CSV sheet with all users' email addresses
- D. Use the gcloud command line tool to convert them into Google Cloud Platform accounts.
- E. In the G Suite console, add the users to a special group called cloud-console-users@yourdomain.com. Rely on the default behavior of the Cloud Platform to grant users access if they are members of this group.

Answer: B

NEW QUESTION 2

You need to grant access for three users so that they can view and edit table data on a Cloud Spanner instance. What should you do?

- A. Run `gcloud iam roles describe roles/spanner.databaseUser`
- B. Add the users to the role.
- C. Run `gcloud iam roles describe roles/spanner.databaseUser`
- D. Add the users to a new group
- E. Add the group to the role.
- F. Run `gcloud iam roles describe roles/spanner.viewer --project my-project`
- G. Add the users to the role.
- H. Run `gcloud iam roles describe roles/spanner.viewer --project my-project`
- I. Add the users to a new group. Add the group to the role.

Answer: A

NEW QUESTION 3

You have just created a new project which will be used to deploy a globally distributed application. You will use Cloud Spanner for data storage. You want to create a Cloud Spanner instance. You want to perform the first step in preparation of creating the instance. What should you do?

- A. Grant yourself the IAM role of Cloud Spanner Admin
- B. Create a new VPC network with subnetworks in all desired regions
- C. Configure your Cloud Spanner instance to be multi-regional
- D. Enable the Cloud Spanner API

Answer: C

NEW QUESTION 4

You want to configure a solution for archiving data in a Cloud Storage bucket. The solution must be cost-effective. Data with multiple versions should be archived after 30 days. Previous versions are accessed once a month for reporting. This archive data is also occasionally updated at month-end. What should you do?

- A. Add a bucket lifecycle rule that archives data with newer versions after 30 days to Coldline Storage.
- B. Add a bucket lifecycle rule that archives data with newer versions after 30 days to Nearline Storage.
- C. Add a bucket lifecycle rule that archives data from regional storage after 30 days to Coldline Storage.
- D. Add a bucket lifecycle rule that archives data from regional storage after 30 days to Nearline Storage.

Answer: B

NEW QUESTION 5

You are running multiple VPC-native Google Kubernetes Engine clusters in the same subnet. The IPs available for the nodes are exhausted, and you want to ensure that the clusters can grow in nodes when needed. What should you do?

- A. Create a new subnet in the same region as the subnet being used.
- B. Add an alias IP range to the subnet used by the GKE clusters.
- C. Create a new VPC, and set up VPC peering with the existing VPC.
- D. Expand the CIDR range of the relevant subnet for the cluster.

Answer: C

Explanation:

To create a VPC peering connection, first create a request to peer with another VPC.

NEW QUESTION 6

You are developing a new application and are looking for a Jenkins installation to build and deploy your source code. You want to automate the installation as quickly and easily as possible. What should you do?

- A. Deploy Jenkins through the Google Cloud Marketplace.
- B. Create a new Compute Engine instance
- C. Run the Jenkins executable.
- D. Create a new Kubernetes Engine cluster
- E. Create a deployment for the Jenkins image.
- F. Create an instance template with the Jenkins executable
- G. Create a managed instance group with this template.

Answer: A

NEW QUESTION 7

You are hosting an application from Compute Engine virtual machines (VMs) in us-central1-a. You want to adjust your design to support the failure of a single Compute Engine zone, eliminate downtime, and minimize cost. What should you do?

- A. – Create Compute Engine resources in us-central1-b.–Balance the load across both us-central1-a and us-central1-b.
- B. – Create a Managed Instance Group and specify us-central1-a as the zone.–Configure the Health Check with a short Health Interval.
- C. – Create an HTTP(S) Load Balancer.–Create one or more global forwarding rules to direct traffic to your VMs.
- D. – Perform regular backups of your application.–Create a Cloud Monitoring Alert and be notified if your application becomes unavailable.–Restore from backups when notified.

Answer: C

NEW QUESTION 8

You have a development project with appropriate IAM roles defined. You are creating a production project and want to have the same IAM roles on the new project, using the fewest possible steps. What should you do?

- A. Use gcloud iam roles copy and specify the production project as the destination project.
- B. Use gcloud iam roles copy and specify your organization as the destination organization.
- C. In the Google Cloud Platform Console, use the 'create role from role' functionality.
- D. In the Google Cloud Platform Console, use the 'create role' functionality and select all applicable permissions.

Answer: B

NEW QUESTION 9

Your projects incurred more costs than you expected last month. Your research reveals that a development GKE container emitted a huge number of logs, which resulted in higher costs. You want to disable the logs quickly using the minimum number of steps. What should you do?

- A. 1. Go to the Logs ingestion window in Stackdriver Logging, and disable the log source for the GKE container resource.
- B. 1. Go to the Logs ingestion window in Stackdriver Logging, and disable the log source for the GKE Cluster Operations resource.
- C. 1. Go to the GKE console, and delete existing clusters.2. Recreate a new cluster.3. Clear the option to enable legacy Stackdriver Logging.
- D. 1. Go to the GKE console, and delete existing clusters.2. Recreate a new cluster.3. Clear the option to enable legacy Stackdriver Monitoring.

Answer: A

NEW QUESTION 10

You need to set up permissions for a set of Compute Engine instances to enable them to write data into a particular Cloud Storage bucket. You want to follow Google-recommended practices. What should you do?

- A. Create a service account with an access scop
- B. Use the access scope 'https://www.googleapis.com/auth/devstorage.write_only'.
- C. Create a service account with an access scop
- D. Use the access scope 'https://www.googleapis.com/auth/cloud-platform'.
- E. Create a service account and add it to the IAM role 'storage.objectCreator' for that bucket.
- F. Create a service account and add it to the IAM role 'storage.objectAdmin' for that bucket.

Answer: B

NEW QUESTION 10

You need to manage a third-party application that will run on a Compute Engine instance. Other Compute Engine instances are already running with default configuration. Application installation files are hosted on Cloud Storage. You need to access these files from the new instance without allowing other virtual machines (VMs) to access these files. What should you do?

- A. Create the instance with the default Compute Engine service account Grant the service account permissions on Cloud Storage.
- B. Create the instance with the default Compute Engine service account Add metadata to the objects on Cloud Storage that matches the metadata on the new instance.
- C. Create a new service account and assign this service account to the new instance Grant the service account permissions on Cloud Storage.
- D. Create a new service account and assign this service account to the new instance Add metadata to the objects on Cloud Storage that matches the metadata on the new instance.

Answer: C

NEW QUESTION 11

You are asked to set up application performance monitoring on Google Cloud projects A, B, and C as a single pane of glass. You want to monitor CPU, memory, and disk. What should you do?

- A. Enable API and then share charts from project A, B, and C.
- B. Enable API and then give the metrics.reader role to projects A, B, and C.
- C. Enable API and then use default dashboards to view all projects in sequence.
- D. Enable API, create a workspace under project A, and then add project B and C.

Answer: D

NEW QUESTION 12

You need to run an important query in BigQuery but expect it to return a lot of records. You want to find out how much it will cost to run the query. You are using on-demand pricing. What should you do?

- A. Arrange to switch to Flat-Rate pricing for this query, then move back to on-demand.
- B. Use the command line to run a dry run query to estimate the number of bytes read.
- C. Then convert that bytes estimate to dollars using the Pricing Calculator.
- D. Use the command line to run a dry run query to estimate the number of bytes returned.
- E. Then convert that bytes estimate to dollars using the Pricing Calculator.
- F. Run a select count (*) to get an idea of how many records your query will look through.
- G. Then convert that number of rows to dollars using the Pricing Calculator.

Answer: B

NEW QUESTION 16

You recently deployed a new version of an application to App Engine and then discovered a bug in the release. You need to immediately revert to the prior version of the application. What should you do?

- A. Run `gcloud app restore`.
- B. On the App Engine page of the GCP Console, select the application that needs to be reverted and click Revert.
- C. On the App Engine Versions page of the GCP Console, route 100% of the traffic to the previous version.
- D. Deploy the original version as a separate application.
- E. Then go to App Engine settings and split traffic between applications so that the original version serves 100% of the requests.

Answer: D

NEW QUESTION 19

You need to provide a cost estimate for a Kubernetes cluster using the GCP pricing calculator for Kubernetes. Your workload requires high IOPs, and you will also be using disk snapshots. You start by entering the number of nodes, average hours, and average days. What should you do next?

- A. Fill in local SSD
- B. Fill in persistent disk storage and snapshot storage.
- C. Fill in local SSD
- D. Add estimated cost for cluster management.
- E. Select Add GPU
- F. Fill in persistent disk storage and snapshot storage.
- G. Select Add GPU
- H. Add estimated cost for cluster management.

Answer: C

NEW QUESTION 22

You are setting up a Windows VM on Compute Engine and want to make sure you can log in to the VM via RDP. What should you do?

- A. After the VM has been created, use your Google Account credentials to log in into the VM.
- B. After the VM has been created, use `gcloud compute reset-windows-password` to retrieve the login credentials for the VM.
- C. When creating the VM, add metadata to the instance using 'windows-password' as the key and a password as the value.
- D. After the VM has been created, download the JSON private key for the default Compute Engine service account.
- E. Use the credentials in the JSON file to log in to the VM.

Answer: D

NEW QUESTION 24

Your development team needs a new Jenkins server for their project. You need to deploy the server using the fewest steps possible. What should you do?

- A. Download and deploy the Jenkins Java WAR to App Engine Standard.
- B. Create a new Compute Engine instance and install Jenkins through the command line interface.
- C. Create a Kubernetes cluster on Compute Engine and create a deployment with the Jenkins Docker image.
- D. Use GCP Marketplace to launch the Jenkins solution.

Answer: D

NEW QUESTION 27

You have a Linux VM that must connect to Cloud SQL. You created a service account with the appropriate access rights. You want to make sure that the VM uses this service account instead of the default Compute Engine service account. What should you do?

- A. When creating the VM via the web console, specify the service account under the 'Identity and API Access' section.
- B. Download a JSON Private Key for the service account.
- C. On the Project Metadata, add that JSON as the value for the key `compute-engine-service-account`.
- D. Download a JSON Private Key for the service account.
- E. On the Custom Metadata of the VM, add that JSON as the value for the key `compute-engine-service-account`.
- F. Download a JSON Private Key for the service account.
- G. After creating the VM, ssh into the VM and save the JSON under `~/gcloud/compute-engine-service-account.json`.

Answer: A

NEW QUESTION 30

You need to verify that a Google Cloud Platform service account was created at a particular time. What should you do?

- A. Filter the Activity log to view the Configuration categor
- B. Filter the Resource type to Service Account.
- C. Filter the Activity log to view the Configuration categor
- D. Filter the Resource type to Google Project.
- E. Filter the Activity log to view the Data Access categor
- F. Filter the Resource type to Service Account.
- G. Filter the Activity log to view the Data Access categor
- H. Filter the Resource type to Google Project.

Answer: D

NEW QUESTION 35

Your company runs its Linux workloads on Compute Engine instances. Your company will be working with a new operations partner that does not use Google Accounts. You need to grant access to the instances to your operations partner so they can maintain the installed tooling. What should you do?

- A. Enable Cloud IAP for the Compute Engine instances, and add the operations partner as a Cloud IAP Tunnel User.
- B. Tag all the instances with the same network ta
- C. Create a firewall rule in the VPC to grant TCP access on port 22 for traffic from the operations partner to instances with the network tag.
- D. Set up Cloud VPN between your Google Cloud VPC and the internal network of the operations partner.
- E. Ask the operations partner to generate SSH key pairs, and add the public keys to the VM instances.

Answer: B

NEW QUESTION 39

You need to assign a Cloud Identity and Access Management (Cloud IAM) role to an external auditor. The auditor needs to have permissions to review your Google Cloud Platform (GCP) Audit Logs and also to review your Data Access logs. What should you do?

- A. Assign the auditor the IAM role roles/logging.privateLogViewe
- B. Perform the export of logs to Cloud Storage.
- C. Assign the auditor the IAM role roles/logging.privateLogViewe
- D. Direct the auditor to also review the logs for changes to Cloud IAM policy.
- E. Assign the auditor's IAM user to a custom role that has logging.privateLogEntries.list permissio
- F. Perform the export of logs to Cloud Storage.
- G. Assign the auditor's IAM user to a custom role that has logging.privateLogEntries.list permissio
- H. Direct the auditor to also review the logs for changes to Cloud IAM policy.

Answer: C

NEW QUESTION 41

You have been asked to set up the billing configuration for a new Google Cloud customer. Your customer wants to group resources that share common IAM policies. What should you do?

- A. Use labels to group resources that share common IAM policies
- B. Use folders to group resources that share common IAM policies
- C. Set up a proper billing account structure to group IAM policies
- D. Set up a proper project naming structure to group IAM policies

Answer: B

NEW QUESTION 45

You are using Deployment Manager to create a Google Kubernetes Engine cluster. Using the same Deployment Manager deployment, you also want to create a DaemonSet in the kube-system namespace of the cluster. You want a solution that uses the fewest possible services. What should you do?

- A. Add the cluster's API as a new Type Provider in Deployment Manager, and use the new type to create the DaemonSet.
- B. Use the Deployment Manager Runtime Configurator to create a new Config resource that contains the DaemonSet definition.
- C. With Deployment Manager, create a Compute Engine instance with a startup script that uses kubectl to create the DaemonSet.
- D. In the cluster's definition in Deployment Manager, add a metadata that has kube-system as key and the DaemonSet manifest as value.

Answer: C

NEW QUESTION 47

You want to run a single caching HTTP reverse proxy on GCP for a latency-sensitive website. This specific reverse proxy consumes almost no CPU. You want to have a 30-GB in-memory cache, and need an additional 2 GB of memory for the rest of the processes. You want to minimize cost. How should you run this reverse proxy?

- A. Create a Cloud Memorystore for Redis instance with 32-GB capacity.
- B. Run it on Compute Engine, and choose a custom instance type with 6 vCPUs and 32 GB of memory.
- C. Package it in a container image, and run it on Kubernetes Engine, using n1-standard-32 instances as nodes.
- D. Run it on Compute Engine, choose the instance type n1-standard-1, and add an SSD persistent disk of 32 GB.

Answer: B

NEW QUESTION 52

You created a Google Cloud Platform project with an App Engine application inside the project. You initially configured the application to be served from the us-central region. Now you want the application to be served from the asia-northeast1 region. What should you do?

- A. Change the default region property setting in the existing GCP project to asia-northeast1.

- B. Change the region property setting in the existing App Engine application from us-central to asia-northeast1.
- C. Create a second App Engine application in the existing GCP project and specify asia-northeast1 as the region to serve your application.
- D. Create a new GCP project and create an App Engine application inside this new project
- E. Specify asia-northeast1 as the region to serve your application.

Answer: C

NEW QUESTION 55

You need to deploy an application, which is packaged in a container image, in a new project. The application exposes an HTTP endpoint and receives very few requests per day. You want to minimize costs. What should you do?

- A. Deploy the container on Cloud Run.
- B. Deploy the container on Cloud Run on GKE.
- C. Deploy the container on App Engine Flexible.
- D. Deploy the container on Google Kubernetes Engine, with cluster autoscaling and horizontal pod autoscaling enabled.

Answer: A

NEW QUESTION 58

Your organization has three existing Google Cloud projects. You need to bill the Marketing department for only their Google Cloud services for a new initiative within their group. What should you do?

- A. * 1. Verify that you are assigned the Billing Administrator IAM role for your organization's Google Cloud Project for the Marketing department* 2. Link the new project to a Marketing Billing Account
- B. * 1. Verify that you are assigned the Billing Administrator IAM role for your organization's Google Cloud account* 2. Create a new Google Cloud Project for the Marketing department* 3. Set the default key-value project labels to department marketing for all services in this project
- C. * 1. Verify that you are assigned the Organization Administrator IAM role for your organization's Google Cloud account* 2. Create a new Google Cloud Project for the Marketing department 3. Link the new project to a Marketing Billing Account.
- D. * 1. Verify that you are assigned the Organization Administrator IAM role for your organization's Google Cloud account* 2. Create a new Google Cloud Project for the Marketing department* 3. Set the default key value project labels to department marketing for all services in this project

Answer: A

NEW QUESTION 62

Your company's infrastructure is on-premises, but all machines are running at maximum capacity. You want to burst to Google Cloud. The workloads on Google Cloud must be able to directly communicate to the workloads on-premises using a private IP range. What should you do?

- A. In Google Cloud, configure the VPC as a host for Shared VPC.
- B. In Google Cloud, configure the VPC for VPC Network Peering.
- C. Create bastion hosts both in your on-premises environment and on Google Cloud
- D. Configure both as proxy servers using their public IP addresses.
- E. Set up Cloud VPN between the infrastructure on-premises and Google Cloud.

Answer: B

NEW QUESTION 66

Every employee of your company has a Google account. Your operational team needs to manage a large number of instances on Compute Engine. Each member of this team needs only administrative access to the servers. Your security team wants to ensure that the deployment of credentials is operationally efficient and must be able to determine who accessed a given instance. What should you do?

- A. Generate a new SSH key pair
- B. Give the private key to each member of your team
- C. Configure the public key in the metadata of each instance.
- D. Ask each member of the team to generate a new SSH key pair and to send you their public key
- E. Use a configuration management tool to deploy those keys on each instance.
- F. Ask each member of the team to generate a new SSH key pair and to add the public key to their Google account
- G. Grant the "compute.osAdminLogin" role to the Google group corresponding to this team.
- H. Generate a new SSH key pair
- I. Give the private key to each member of your team
- J. Configure the public key as a project-wide public SSH key in your Cloud Platform project and allow project-wide public SSH keys on each instance.

Answer: C

Explanation:

<https://cloud.google.com/compute/docs/instances/managing-instance-access>

NEW QUESTION 67

You've deployed a microservice called myapp1 to a Google Kubernetes Engine cluster using the YAML file specified below:

```
apiVersion: apps/v1
kind: Deployment
metadata:
  name: myapp1-deployment
spec:
  selector:
    matchLabels:
      app: myapp1
  replicas: 2
  template:
    metadata:
      labels:
        app: myapp1
    spec:
      containers:
        - name: main-container
          image: gcr.io/my-company-repo/myapp1:1.4
          env:
            - name: DB_PASSWORD
              value: "t0ugh2guess!"
          ports:
            - containerPort: 8080
```

You need to refactor this configuration so that the database password is not stored in plain text. You want to follow Google-recommended practices. What should you do?

- A. Store the database password inside the Docker image of the container, not in the YAML file.
- B. Store the database password inside a Secret objec
- C. Modify the YAML file to populate the DB_PASSWORD environment variable from the Secret.
- D. Store the database password inside a ConfigMap objec
- E. Modify the YAML file to populate the DB_PASSWORD environment variable from the ConfigMap.
- F. Store the database password in a file inside a Kubernetes persistent volume, and use a persistent volume claim to mount the volume to the container.

Answer: C

NEW QUESTION 69


An application generates daily reports in a Compute Engine virtual machine (VM). The VM is in the project corp-iot-insights. Your team operates only in the project corp-aggregate-reports and needs a copy of the daily exports in the bucket corp-aggregate-reports-storage. You want to configure access so that the daily reports from the VM are available in the bucket corp-aggregate-reports-storage and use as few steps as possible while following Google-recommended practices. What should you do?

- A. Move both projects under the same folder.
- B. Grant the VM Service Account the role Storage Object Creator on corp-aggregate-reports-storage.
- C. Create a Shared VPC network between both project
- D. Grant the VM Service Account the role Storage Object Creator on corp-iot-insights.
- E. Make corp-aggregate-reports-storage public and create a folder with a pseudo-randomized suffix name. Share the folder with the IoT team.

Answer: D

NEW QUESTION 70

Your company has a 3-tier solution running on Compute Engine. The configuration of the current infrastructure is shown below.

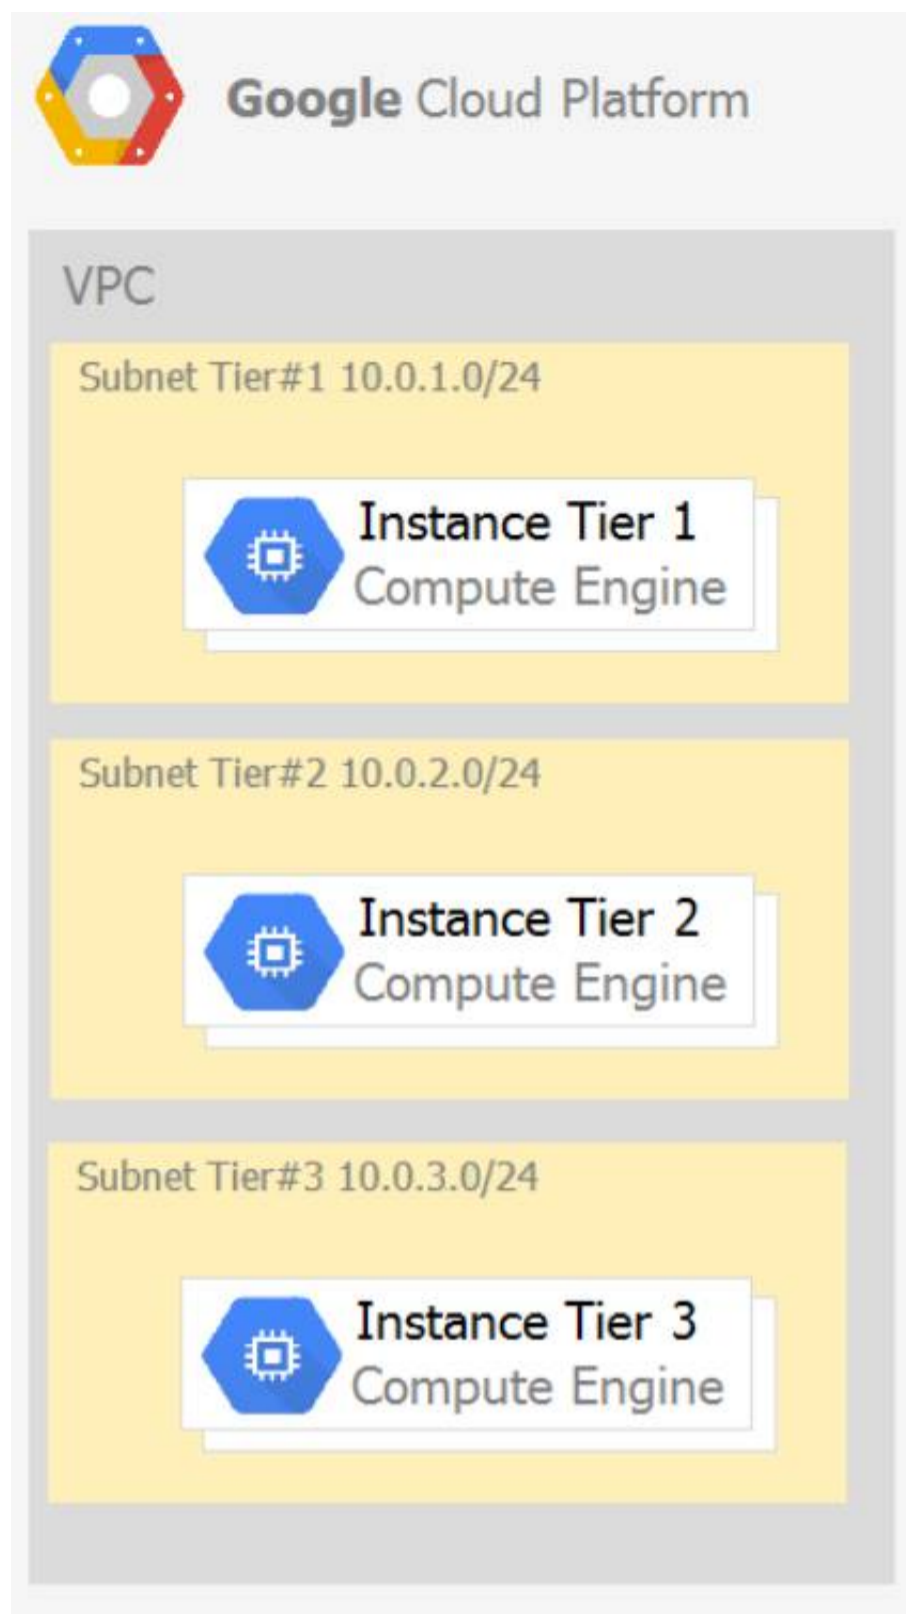

Each tier has a service account that is associated with all instances within it. You need to enable communication on TCP port 8080 between tiers as follows:

- Instances in tier #1 must communicate with tier #2.
- Instances in tier #2 must communicate with tier #3. What should you do?

- A. 1. Create an ingress firewall rule with the following settings:• Targets: all instances• Source filter: IP ranges (with the range set to 10.0.2.0/24)• Protocols: allow all
 2. Create an ingress firewall rule with the following settings:• Targets: all instances• Source filter: IP ranges (with the range set to 10.0.1.0/24)• Protocols: allow all
- B. 1. Create an ingress firewall rule with the following settings:• Targets: all instances with tier #2 service account• Source filter: all instances with tier #1 service account• Protocols: allow TCP:8080
 2. Create an ingress firewall rule with the following settings:• Targets: all instances with tier #3 service account• Source filter: all instances with tier #2 service account• Protocols: allow TCP: 8080
- C. 1. Create an ingress firewall rule with the following settings:• Targets: all instances with tier #2 service account• Source filter: all instances with tier #1 service account• Protocols: allow all
 2. Create an ingress firewall rule with the following settings:• Targets: all instances with tier #3 service account• Source filter: all instances with tier #2 service account• Protocols: allow all
- D. 1. Create an egress firewall rule with the following settings:• Targets: all instances• Source filter: IP ranges (with the range set to 10.0.2.0/24)• Protocols: allow TCP: 8080
 2. Create an egress firewall rule with the following settings:• Targets: all instances• Source filter: IP ranges (with the range set to 10.0.1.0/24)• Protocols: allow TCP: 8080

Answer: B

NEW QUESTION 74

You want to deploy an application on Cloud Run that processes messages from a Cloud Pub/Sub topic. You want to follow Google-recommended practices. What should you do?

- A. 1. Create a Cloud Function that uses a Cloud Pub/Sub trigger on that topic.
 2. Call your application on Cloud Run from the Cloud Function for every message.
- B. 1. Grant the Pub/Sub Subscriber role to the service account used by Cloud Run.
 2. Create a Cloud Pub/Sub subscription for that topic.
 3. Make your application pull messages from that subscription.
- C. 1. Create a service account.
 2. Give the Cloud Run Invoker role to that service account for your Cloud Run application.
 3. Create a Cloud Pub/Sub subscription that uses that service account and uses your Cloud Run application as the push endpoint.
- D. 1. Deploy your application on Cloud Run on GKE with the connectivity set to Internal.
 2. Create a Cloud Pub/Sub subscription for that topic.
 3. In the same Google Kubernetes Engine cluster as your application, deploy a container that takes the messages and sends them to your application.

Answer: D

NEW QUESTION 75

You are given a project with a single virtual private cloud (VPC) and a single subnetwork in the us-central1 region. There is a Compute Engine instance hosting an application in this subnetwork. You need to deploy a new instance in the same project in the europe-west1 region. This new instance needs access to the application. You want to follow Google-recommended practices. What should you do?

- A. 1. Create a subnetwork in the same VPC, in europe-west1.2. Create the new instance in the new subnetwork and use the first instance's private address as the endpoint.
- B. 1. Create a VPC and a subnetwork in europe-west1.2. Expose the application with an internal load balancer.3. Create the new instance in the new subnetwork and use the load balancer's address as the endpoint.
- C. 1. Create a subnetwork in the same VPC, in europe-west1.2. Use Cloud VPN to connect the two subnetworks.3. Create the new instance in the new subnetwork and use the first instance's private address as the endpoint.
- D. 1. Create a VPC and a subnetwork in europe-west1.2. Peer the 2 VPCs.3. Create the new instance in the new subnetwork and use the first instance's private address as the endpoint.

Answer: B

NEW QUESTION 79

Your organization is a financial company that needs to store audit log files for 3 years. Your organization has hundreds of Google Cloud projects. You need to implement a cost-effective approach for log file retention. What should you do?

- A. Create an export to the sink that saves logs from Cloud Audit to BigQuery.
- B. Create an export to the sink that saves logs from Cloud Audit to a Coldline Storage bucket.
- C. Write a custom script that uses logging API to copy the logs from Stackdriver logs to BigQuery.
- D. Export these logs to Cloud Pub/Sub and write a Cloud Dataflow pipeline to store logs to Cloud SQL.

Answer: A

NEW QUESTION 80

You have a Google Cloud Platform account with access to both production and development projects. You need to create an automated process to list all compute instances in development and production projects on a daily basis. What should you do?

- A. Create two configurations using gcloud confi
- B. Write a script that sets configurations as active, individuall
- C. For each configuration, use gcloud compute instances list to get a list of compute resources.
- D. Create two configurations using gsutil confi
- E. Write a script that sets configurations as active,individuall
- F. For each configuration, use gsutil compute instances list to get a list of compute resources.
- G. Go to Cloud Shell and export this information to Cloud Storage on a daily basis.
- H. Go to GCP Console and export this information to Cloud SQL on a daily basis.

Answer: A

NEW QUESTION 82

You are using multiple configurations for gcloud. You want to review the configured Kubernetes Engine cluster of an inactive configuration using the fewest possible steps. What should you do?

- A. Use gcloud config configurations describe to review the output.
- B. Use gcloud config configurations activate and gcloud config list to review the output.
- C. Use kubectl config get-contexts to review the output.
- D. Use kubectl config use-context and kubectl config view to review the output.

Answer: D

NEW QUESTION 84

Your company uses a large number of Google Cloud services centralized in a single project. All teams have specific projects for testing and development. The DevOps team needs access to all of the production services in order to perform their job. You want to prevent Google Cloud product changes from broadening their permissions in the future. You want to follow Google-recommended practices. What should you do?

- A. Grant all members of the DevOps team the role of Project Editor on the organization level.
- B. Grant all members of the DevOps team the role of Project Editor on the production project.
- C. Create a custom role that combines the required permission
- D. Grant the DevOps team the custom role on the production project.
- E. Create a custom role that combines the required permission
- F. Grant the DevOps team the custom role on the organization level.

Answer: A

NEW QUESTION 89

You want to configure 10 Compute Engine instances for availability when maintenance occurs. Your requirements state that these instances should attempt to automatically restart if they crash. Also, the instances should be highly available including during system maintenance. What should you do?

- A. Create an instance template for the instance
- B. Set the 'Automatic Restart' to o
- C. Set the 'On-host maintenance' to Migrate VM instanc
- D. Add the instance template to an instance group.
- E. Create an instance template for the instance
- F. Set 'Automatic Restart' to of
- G. Set 'On-host maintenance' to Terminate VM instance
- H. Add the instance template to an instance group.

- I. Create an instance group for the instance
- J. Set the 'Autohealing' health check to healthy (HTTP).
- K. Create an instance group for the instanc
- L. Verify that the 'Advanced creation options' setting for 'do not retry machine creation' is set to off.

Answer: B

NEW QUESTION 93

You need to create a new billing account and then link it with an existing Google Cloud Platform project. What should you do?

- A. Verify that you are Project Billing Manager for the GCP projec
- B. Update the existing project to link it to the existing billing account.
- C. Verify that you are Project Billing Manager for the GCP projec
- D. Create a new billing account and linkthe new billing account to the existing project.
- E. Verify that you are Billing Administrator for the billing accoun
- F. Create a new project and link the new project to the existing billing account.
- G. Verify that you are Billing Administrator for the billing accoun
- H. Update the existing project to link it to the existing billing account.

Answer: C

NEW QUESTION 94

Your organization needs to grant users access to query datasets in BigQuery but prevent them from accidentally deleting the datasets. You want a solution that follows Google-recommended practices. What should you do?

- A. Add users to roles/bigquery user role only, instead of roles/bigquery dataOwner.
- B. Add users to roles/bigquery dataEditor role only, instead of roles/bigquery dataOwner.
- C. Create a custom role by removing delete permissions, and add users to that role only.
- D. Create a custom role by removing delete permission
- E. Add users to the group, and then add the group to the custom role.

Answer: B

NEW QUESTION 97

You have a project for your App Engine application that serves a development environment. The required testing has succeeded and you want to create a new project to serve as your production environment. What should you do?

- A. Use gcloud to create the new project, and then deploy your application to the new project.
- B. Use gcloud to create the new project and to copy the deployed application to the new project.
- C. Create a Deployment Manager configuration file that copies the current App Engine deployment into a new project.
- D. Deploy your application again using gcloud and specify the project parameter with the new project name to create the new project.

Answer: C

NEW QUESTION 98

You want to select and configure a solution for storing and archiving data on Google Cloud Platform. You need to support compliance objectives for data from one geographic location. This data is archived after 30 days and needs to be accessed annually. What should you do?

- A. Select Multi-Regional Storag
- B. Add a bucket lifecycle rule that archives data after 30 days to Coldline Storage.
- C. Select Multi-Regional Storag
- D. Add a bucket lifecycle rule that archives data after 30 days to Nearline Storage.
- E. Select Regional Storag
- F. Add a bucket lifecycle rule that archives data after 30 days to Nearline Storage.
- G. Select Regional Storag
- H. Add a bucket lifecycle rule that archives data after 30 days to Coldline Storage.

Answer: C

NEW QUESTION 101

Your existing application running in Google Kubernetes Engine (GKE) consists of multiple pods running on four GKE n1-standard-2 nodes. You need to deploy additional pods requiring n2-highmem-16 nodes without any downtime. What should you do?

- A. Use gcloud container clusters upgrad
- B. Deploy the new services.
- C. Create a new Node Pool and specify machine type n2-highmem-16. Deploy the new pods.
- D. Create a new cluster with n2-highmem-16 node
- E. Redeploy the pods and delete the old cluster.
- F. Create a new cluster with both n1-standard-2 and n2-highmem-16 node
- G. Redeploy the pods and delete the old cluster.

Answer: B

NEW QUESTION 104

You are running multiple microservices in a Kubernetes Engine cluster. One microservice is rendering images. The microservice responsible for the image rendering requires a large amount of CPU time compared to the memory it requires. The other microservices are workloads that are optimized for n1-standard machine types. You need to optimize your cluster so that all workloads are using resources as efficiently as possible. What should you do?

- A. Assign the pods of the image rendering microservice a higher pod priority than the older microservices
- B. Create a node pool with compute-optimized machine type nodes for the image rendering microservice Use the node pool with general-purpose machine type nodes for the other microservices
- C. Use the node pool with general-purpose machine type nodes for lite mage rendering microservice Create a nodepool with compute-optimized machine type nodes for the other microservices
- D. Configure the required amount of CPU and memory in the resource requests specification of the image rendering microservice deployment Keep the resource requests for the other microservices at the default

Answer: B

NEW QUESTION 109

Your VMs are running in a subnet that has a subnet mask of 255.255.255.240. The current subnet has no more free IP addresses and you require an additional 10 IP addresses for new VMs. The existing and new VMs should all be able to reach each other without additional routes. What should you do?

- A. Use gcloud to expand the IP range of the current subnet.
- B. Delete the subnet, and recreate it using a wider range of IP addresses.
- C. Create a new projec
- D. Use Shared VPC to share the current network with the new project.
- E. Create a new subnet with the same starting IP but a wider range to overwrite the current subnet.

Answer: C

NEW QUESTION 111

You have an application on a general-purpose Compute Engine instance that is experiencing excessive disk read throttling on its Zonal SSD Persistent Disk. The application primarily reads large files from disk. The disk size is currently 350 GB. You want to provide the maximum amount of throughput while minimizing costs. What should you do?

- A. Increase the size of the disk to 1 TB.
- B. Increase the allocated CPU to the instance.
- C. Migrate to use a Local SSD on the instance.
- D. Migrate to use a Regional SSD on the instance.

Answer: C

NEW QUESTION 112

You are the project owner of a GCP project and want to delegate control to colleagues to manage buckets and files in Cloud Storage. You want to follow Google-recommended practices. Which IAM roles should you grant your colleagues?

- A. Project Editor
- B. Storage Admin
- C. Storage Object Admin
- D. Storage Object Creator

Answer: B

NEW QUESTION 116

Your finance team wants to view the billing report for your projects. You want to make sure that the finance team does not get additional permissions to the project. What should you do?

- A. Add the group for the finance team to roles/billing user role.
- B. Add the group for the finance team to roles/billing admin role.
- C. Add the group for the finance team to roles/billing viewer role.
- D. Add the group for the finance team to roles/billing project/Manager role.

Answer: A

NEW QUESTION 118

You are deploying an application to a Compute Engine VM in a managed instance group. The application must be running at all times, but only a single instance of the VM should run per GCP project. How should you configure the instance group?

- A. Set autoscaling to On, set the minimum number of instances to 1, and then set the maximum number of instances to 1.
- B. Set autoscaling to Off, set the minimum number of instances to 1, and then set the maximum number of instances to 1.
- C. Set autoscaling to On, set the minimum number of instances to 1, and then set the maximum number of instances to 2.
- D. Set autoscaling to Off, set the minimum number of instances to 1, and then set the maximum number of instances to 2.

Answer: A

NEW QUESTION 122

You are managing a Data Warehouse on BigQuery. An external auditor will review your company's processes, and multiple external consultants will need view access to the data. You need to provide them with view access while following Google-recommended practices. What should you do?

- A. Grant each individual external consultant the role of BigQuery Editor
- B. Grant each individual external consultant the role of BigQuery Viewer
- C. Create a Google Group that contains the consultants and grant the group the role of BigQuery Editor
- D. Create a Google Group that contains the consultants, and grant the group the role of BigQuery Viewer

Answer: D

NEW QUESTION 126

You have a virtual machine that is currently configured with 2 vCPUs and 4 GB of memory. It is running out of memory. You want to upgrade the virtual machine to have 8 GB of memory. What should you do?

- A. Rely on live migration to move the workload to a machine with more memory.
- B. Use gcloud to add metadata to the V
- C. Set the key to required-memory-size and the value to 8 GB.
- D. Stop the VM, change the machine type to n1-standard-8, and start the VM.
- E. Stop the VM, increase the memory to 8 GB, and start the VM.

Answer: D

NEW QUESTION 128

You have an application that looks for its licensing server on the IP 10.0.3.21. You need to deploy the licensing server on Compute Engine. You do not want to change the configuration of the application and want the application to be able to reach the licensing server. What should you do?

- A. Reserve the IP 10.0.3.21 as a static internal IP address using gcloud and assign it to the licensing server.
- B. Reserve the IP 10.0.3.21 as a static public IP address using gcloud and assign it to the licensing server.
- C. Use the IP 10.0.3.21 as a custom ephemeral IP address and assign it to the licensing server.
- D. Start the licensing server with an automatic ephemeral IP address, and then promote it to a static internal IP address.

Answer: A

NEW QUESTION 130

You need to configure IAM access audit logging in BigQuery for external auditors. You want to follow Google-recommended practices. What should you do?

- A. Add the auditors group to the 'logging.viewer' and 'bigQuery.dataViewer' predefined IAM roles.
- B. Add the auditors group to two new custom IAM roles.
- C. Add the auditor user accounts to the 'logging.viewer' and 'bigQuery.dataViewer' predefined IAM roles.
- D. Add the auditor user accounts to two new custom IAM roles.

Answer: C

NEW QUESTION 131

You are assigned to maintain a Google Kubernetes Engine (GKE) cluster named dev that was deployed on Google Cloud. You want to manage the GKE configuration using the command line interface (CLI). You have just downloaded and installed the Cloud SDK. You want to ensure that future CLI commands by default address this specific cluster. What should you do?

- A. Use the command gcloud config set container/cluster dev
- B. Use the command gcloud container clusters update dev
- C. Create a file called gk
- D. default in the -/ .gcloud folder that contains the cluster name
- E. Create a file called default
- F. j son in the -/.gcloud folder that contains the cluster name

Answer: B

NEW QUESTION 136

You need to add a group of new users to Cloud Identity. Some of the users already have existing Google accounts. You want to follow one of Google's recommended practices and avoid conflicting accounts. What should you do?

- A. Invite the user to transfer their existing account
- B. Invite the user to use an email alias to resolve the conflict
- C. Tell the user that they must delete their existing account
- D. Tell the user to remove all personal email from the existing account

Answer: B

NEW QUESTION 140

You host a static website on Cloud Storage. Recently, you began to include links to PDF files on this site.

Currently, when users click on the links to these PDF files, their browsers prompt them to save the file onto their local system. Instead, you want the clicked PDF files to be displayed within the browser window directly, without prompting the user to save the file locally. What should you do?

- A. Enable Cloud CDN on the website frontend.
- B. Enable 'Share publicly' on the PDF file objects.
- C. Set Content-Type metadata to application/pdf on the PDF file objects.
- D. Add a label to the storage bucket with a key of Content-Type and value of application/pdf.

Answer: C

NEW QUESTION 143

You have 32 GB of data in a single file that you need to upload to a Nearline Storage bucket. The WAN connection you are using is rated at 1 Gbps, and you are the only one on the connection. You want to use as much of the rated 1 Gbps as possible to transfer the file rapidly. How should you upload the file?

- A. Use the GCP Console to transfer the file instead of gsutil.
- B. Enable parallel composite uploads using gsutil on the file transfer.

- C. Decrease the TCP window size on the machine initiating the transfer.
- D. Change the storage class of the bucket from Nearline to Multi-Regional.

Answer: B

NEW QUESTION 148

You have created an application that is packaged into a Docker image. You want to deploy the Docker image as a workload on Google Kubernetes Engine. What should you do?

- A. Upload the image to Cloud Storage and create a Kubernetes Service referencing the image
- B. Upload the image to Cloud Storage and create a Kubernetes Deployment referencing the image
- C. Upload the image to Container Registry and create a Kubernetes Service referencing the image.
- D. Upload the image to Container Registry and create a Kubernetes Deployment referencing the image

Answer: C

NEW QUESTION 152

You have production and test workloads that you want to deploy on Compute Engine. Production VMs need to be in a different subnet than the test VMs. All the VMs must be able to reach each other over internal IP without creating additional routes. You need to set up VPC and the 2 subnets. Which configuration meets these requirements?

- A. Create a single custom VPC with 2 subnet
- B. Create each subnet in a different region and with a different CIDR range.
- C. Create a single custom VPC with 2 subnet
- D. Create each subnet in the same region and with the same CIDR range.
- E. Create 2 custom VPCs, each with a single subnet
- F. Create each subnet in a different region and with a different CIDR range.
- G. Create 2 custom VPCs, each with a single subnet
- H. Create each subnet in the same region and with the same CIDR range.

Answer: A

NEW QUESTION 155

You are building an archival solution for your data warehouse and have selected Cloud Storage to archive your data. Your users need to be able to access this archived data once a quarter for some regulatory requirements. You want to select a cost-efficient option. Which storage option should you use?

- A. Cold Storage
- B. Nearline Storage
- C. Regional Storage
- D. Multi-Regional Storage

Answer: B

Explanation:

Nearline, Coldline, and Archive offer ultra low-cost, highly-durable, highly available archival storage. For data accessed less than once a year, Archive is a cost-effective storage option for long-term preservation of data.

Coldline is also ideal for cold storage—data your business expects to touch less than once a quarter. For warmer storage, choose Nearline: data you expect to access less than once a month, but possibly multiple times throughout the year. All storage classes are available across all GCP regions and provide unparalleled sub-second access speeds with a consistent API.

NEW QUESTION 156

You are building a product on top of Google Kubernetes Engine (GKE). You have a single GKE cluster. For each of your customers, a Pod is running in that cluster, and your customers can run arbitrary code inside their Pod. You want to maximize the isolation between your customers' Pods. What should you do?

- A. Use Binary Authorization and whitelist only the container images used by your customers' Pods.
- B. Use the Container Analysis API to detect vulnerabilities in the containers used by your customers' Pods.
- C. Create a GKE node pool with a sandbox type configured to gvisor
- D. Add the parameter runtimeClassName: gvisor to the specification of your customers' Pods.
- E. Use the cos_containerd image for your GKE node
- F. Add a nodeSelector with the value cloud.google.com/gke-os-distribution: cos_containerd to the specification of your customers' Pods.

Answer: C

NEW QUESTION 159

You are configuring service accounts for an application that spans multiple projects. Virtual machines (VMs) running in the web-applications project need access to BigQuery datasets in crm-databases-proj. You want to follow Google-recommended practices to give access to the service account in the web-applications project. What should you do?

- A. Give "project owner" for web-applications appropriate roles to crm-databases-proj
- B. Give "project owner" role to crm-databases-proj and the web-applications project.
- C. Give "project owner" role to crm-databases-proj and bigquery.dataViewer role to web-applications.
- D. Give bigquery.dataViewer role to crm-databases-proj and appropriate roles to web-applications.

Answer: D

NEW QUESTION 160

You are hosting an application on bare-metal servers in your own data center. The application needs access to Cloud Storage. However, security policies prevent

the servers hosting the application from having public IP addresses or access to the internet. You want to follow Google-recommended practices to provide the application with access to Cloud Storage. What should you do?

- A. 1. Use nslookup to get the IP address for storage.googleapis.com.2. Negotiate with the security team to be able to give a public IP address to the servers.3. Only allow egress traffic from those servers to the IP addresses for storage.googleapis.com.
- B. 1. Using Cloud VPN, create a VPN tunnel to a Virtual Private Cloud (VPC) in Google Cloud Platform (GCP).2. In this VPC, create a Compute Engine instance and install the Squid proxy server on this instance.3. Configure your servers to use that instance as a proxy to access Cloud Storage.
- C. 1. Use Migrate for Compute Engine (formerly known as Velostrata) to migrate those servers to Compute Engine.2. Create an internal load balancer (ILB) that uses storage.googleapis.com as backend.3. Configure your new instances to use this ILB as proxy.
- D. 1. Using Cloud VPN or Interconnect, create a tunnel to a VPC in GCP.2. Use Cloud Router to create a custom route advertisement for 199.36.153.4/30. Announce that network to your on-premises network through the VPN tunnel.3. In your on-premises network, configure your DNS server to resolve *.googleapis.com as a CNAME to restricted.googleapis.com.

Answer: D

NEW QUESTION 162

You are operating a Google Kubernetes Engine (GKE) cluster for your company where different teams can run non-production workloads. Your Machine Learning (ML) team needs access to Nvidia Tesla P100 GPUs to train their models. You want to minimize effort and cost. What should you do?

- A. Ask your ML team to add the "accelerator: gpu" annotation to their pod specification.
- B. Recreate all the nodes of the GKE cluster to enable GPUs on all of them.
- C. Create your own Kubernetes cluster on top of Compute Engine with nodes that have GPU
- D. Dedicate this cluster to your ML team.
- E. Add a new, GPU-enabled, node pool to the GKE cluster
- F. Ask your ML team to add the cloud.google.com/gke -accelerator: nvidia-tesla-p100 nodeSelector to their pod specification.

Answer: B

NEW QUESTION 166

Your organization has user identities in Active Directory. Your organization wants to use Active Directory as their source of truth for identities. Your organization wants to have full control over the Google accounts used by employees for all Google services, including your Google Cloud Platform (GCP) organization. What should you do?

- A. Use Google Cloud Directory Sync (GCDS) to synchronize users into Cloud Identity.
- B. Use the cloud Identity APIs and write a script to synchronize users to Cloud Identity.
- C. Export users from Active Directory as a CSV and import them to Cloud Identity via the Admin Console.
- D. Ask each employee to create a Google account using self sign up
- E. Require that each employee use their company email address and password.

Answer: A

NEW QUESTION 167

You want to select and configure a cost-effective solution for relational data on Google Cloud Platform. You are working with a small set of operational data in one geographic location. You need to support point-in-time recovery. What should you do?

- A. Select Cloud SQL (MySQL). Verify that the enable binary logging option is selected.
- B. Select Cloud SQL (MySQL). Select the create failover replicas option.
- C. Select Cloud Spanner
- D. Set up your instance with 2 nodes.
- E. Select Cloud Spanner
- F. Set up your instance as multi-regional.

Answer: A

NEW QUESTION 172

You have downloaded and installed the gcloud command line interface (CLI) and have authenticated with your Google Account. Most of your Compute Engine instances in your project run in the europe-west1-d zone. You want to avoid having to specify this zone with each CLI command when managing these instances. What should you do?

- A. Set the europe-west1-d zone as the default zone using the gcloud config subcommand.
- B. In the Settings page for Compute Engine under Default location, set the zone to europe-west1-d.
- C. In the CLI installation directory, create a file called default.conf containing zone=europe-west1-d.
- D. Create a Metadata entry on the Compute Engine page with key compute/zone and value europe-west1-d.

Answer: C

NEW QUESTION 177

You have a Dockerfile that you need to deploy on Kubernetes Engine. What should you do?

- A. Use kubectl app deploy <dockerfilename>.
- B. Use gcloud app deploy <dockerfilename>.
- C. Create a docker image from the Dockerfile and upload it to Container Registry
- D. Create a Deployment YAML file to point to that image
- E. Use kubectl to create the deployment with that file.
- F. Create a docker image from the Dockerfile and upload it to Cloud Storage
- G. Create a Deployment YAML file to point to that image
- H. Use kubectl to create the deployment with that file.

Answer: C

NEW QUESTION 181

You have a developer laptop with the Cloud SDK installed on Ubuntu. The Cloud SDK was installed from the Google Cloud Ubuntu package repository. You want to test your application locally on your laptop with Cloud Datastore. What should you do?

- A. Export Cloud Datastore data using `gcloud datastore export`.
- B. Create a Cloud Datastore index using `gcloud datastore indexes create`.
- C. Install the `google-cloud-sdk-datastore-emulator` component using the `apt get install` command.
- D. Install the `cloud-datastore-emulator` component using the `gcloud components install` command.

Answer: D

NEW QUESTION 186

Your organization has strict requirements to control access to Google Cloud projects. You need to enable your Site Reliability Engineers (SREs) to approve requests from the Google Cloud support team when an SRE opens a support case. You want to follow Google-recommended practices. What should you do?

- A. Add your SREs to roles/`iam.roleAdmin` role.
- B. Add your SREs to roles/`accessapproval approver` role.
- C. Add your SREs to a group and then add this group to roles/`iam roleAdmin` role.
- D. Add your SREs to a group and then add this group to roles/`accessapproval approver` role.

Answer: A

NEW QUESTION 191

Your organization uses Active Directory (AD) to manage user identities. Each user uses this identity for federated access to various on-premises systems. Your security team has adopted a policy that requires users to log into Google Cloud with their AD identity instead of their own login. You want to follow the Google-recommended practices to implement this policy. What should you do?

- A. Sync Identities with Cloud Directory Sync, and then enable SAML for single sign-on
- B. Sync Identities in the Google Admin console, and then enable OAuth for single sign-on
- C. Sync identities with 3rd party LDAP sync, and then copy passwords to allow simplified login with (he same credentials
- D. Sync identities with Cloud Directory Sync, and then copy passwords to allow simplified login with the same credentials.

Answer: A

NEW QUESTION 192

A colleague handed over a Google Cloud Platform project for you to maintain. As part of a security checkup, you want to review who has been granted the Project Owner role. What should you do?

- A. In the console, validate which SSH keys have been stored as project-wide keys.
- B. Navigate to Identity-Aware Proxy and check the permissions for these resources.
- C. Enable Audit Logs on the IAM & admin page for all resources, and validate the results.
- D. Use the command `gcloud projects get-iam-policy` to view the current role assignments.

Answer: B

NEW QUESTION 194

You have created a code snippet that should be triggered whenever a new file is uploaded to a Cloud Storage bucket. You want to deploy this code snippet. What should you do?

- A. Use App Engine and configure Cloud Scheduler to trigger the application using Pub/Sub.
- B. Use Cloud Functions and configure the bucket as a trigger resource.
- C. Use Google Kubernetes Engine and configure a CronJob to trigger the application using Pub/Sub.
- D. Use Dataflow as a batch job, and configure the bucket as a data source.

Answer: A

NEW QUESTION 199

You are building an application that stores relational data from users. Users across the globe will use this application. Your CTO is concerned about the scaling requirements because the size of the user base is unknown. You need to implement a database solution that can scale with your user growth with minimum configuration changes. Which storage solution should you use?

- A. Cloud SQL
- B. Cloud Spanner
- C. Cloud Firestore
- D. Cloud Datastore

Answer: D

NEW QUESTION 202

Your management has asked an external auditor to review all the resources in a specific project. The security team has enabled the Organization Policy called Domain Restricted Sharing on the organization node by specifying only your Cloud Identity domain. You want the auditor to only be able to view, but not modify, the resources in that project. What should you do?

- A. Ask the auditor for their Google account, and give them the Viewer role on the project.
- B. Ask the auditor for their Google account, and give them the Security Reviewer role on the project.
- C. Create a temporary account for the auditor in Cloud Identity, and give that account the Viewer role on the project.
- D. Create a temporary account for the auditor in Cloud Identity, and give that account the Security Reviewer role on the project.

Answer: A

NEW QUESTION 204

You are building an application that processes data files uploaded from thousands of suppliers. Your primary goals for the application are data security and the expiration of aged data. You need to design the application to:

- Restrict access so that suppliers can access only their own data.
- Give suppliers write access to data only for 30 minutes.
- Delete data that is over 45 days old.

You have a very short development cycle, and you need to make sure that the application requires minimal maintenance. Which two strategies should you use? (Choose two.)

- A. Build a lifecycle policy to delete Cloud Storage objects after 45 days.
- B. Use signed URLs to allow suppliers limited time access to store their objects.
- C. Set up an SFTP server for your application, and create a separate user for each supplier.
- D. Build a Cloud function that triggers a timer of 45 days to delete objects that have expired.
- E. Develop a script that loops through all Cloud Storage buckets and deletes any buckets that are older than 45 days.

Answer: AE

NEW QUESTION 208

You need to create a copy of a custom Compute Engine virtual machine (VM) to facilitate an expected increase in application traffic due to a business acquisition. What should you do?

- A. Create a Compute Engine snapshot of your base V
- B. Create your images from that snapshot.
- C. Create a Compute Engine snapshot of your base V
- D. Create your instances from that snapshot.
- E. Create a custom Compute Engine image from a snapsho
- F. Create your images from that image.
- G. Create a custom Compute Engine image from a snapsho
- H. Create your instances from that image.

Answer: D

Explanation:

A custom image belongs only to your project. To create an instance with a custom image, you must first have a custom image.

NEW QUESTION 209

You need to create a custom IAM role for use with a GCP service. All permissions in the role must be suitable for production use. You also want to clearly share with your organization the status of the custom role. This will be the first version of the custom role. What should you do?

- A. Use permissions in your role that use the 'supported' support level for role permission
- B. Set the role stage to ALPHA while testing the role permissions.
- C. Use permissions in your role that use the 'supported' support level for role permission
- D. Set the role stage to BETA while testing the role permissions.
- E. Use permissions in your role that use the 'testing' support level for role permission
- F. Set the role stage to ALPHA while testing the role permissions.
- G. Use permissions in your role that use the 'testing' support level for role permission
- H. Set the role stage to BETA while testing the role permissions.

Answer: C

NEW QUESTION 213

You deployed a new application inside your Google Kubernetes Engine cluster using the YAML file specified below.

```
apiVersion: apps/v1
kind: Deployment
metadata:
  name: myapp-deployment
spec:
  selector:
    matchLabels:
      app: myapp
  replicas: 2
  template:
    metadata:
      labels:
        app: myapp
    spec:
      containers:
        - name: myapp
          image: myapp:1.1
          ports:
            - containerPort: 80

apiVersion: v1
kind: Service
metadata:
  name: myapp-service
spec:
  ports:
    - port: 8000
      targetPort: 80
      protocol: TCP
  selector:
    app: myapp
```

You check the status of the deployed pods and notice that one of them is still in PENDING status:

```
kubectl get pods -l app=myapp
```

NAME	READY	STATUS	RESTART	AGE
myapp-deployment-58ddbbb995-lp86m	0/1	Pending	0	9m
myapp-deployment-58ddbbb995-qjpkg	1/1	Running	0	9m

You want to find out why the pod is stuck in pending status. What should you do?

- A. Review details of the myapp-service Service object and check for error messages.
- B. Review details of the myapp-deployment Deployment object and check for error messages.
- C. Review details of myapp-deployment-58ddbbb995-lp86m Pod and check for warning messages.
- D. View logs of the container in myapp-deployment-58ddbbb995-lp86m pod and check for warning messages.

Answer: C

NEW QUESTION 216

Your company implemented BigQuery as an enterprise data warehouse. Users from multiple business units run queries on this data warehouse. However, you notice that query costs for BigQuery are very high, and you need to control costs. Which two methods should you use? (Choose two.)

- A. Split the users from business units to multiple projects.
- B. Apply a user- or project-level custom query quota for BigQuery data warehouse.
- C. Create separate copies of your BigQuery data warehouse for each business unit.
- D. Split your BigQuery data warehouse into multiple data warehouses for each business unit.
- E. Change your BigQuery query model from on-demand to flat rat
- F. Apply the appropriate number of slots to each Project.

Answer: BE

NEW QUESTION 219

You have an application that receives SSL-encrypted TCP traffic on port 443. Clients for this application are located all over the world. You want to minimize latency for the clients. Which load balancing option should you use?

- A. HTTPS Load Balancer
- B. Network Load Balancer
- C. SSL Proxy Load Balancer
- D. Internal TCP/UDP Load Balance
- E. Add a firewall rule allowing ingress traffic from 0.0.0.0/0 on the target instances.

Answer: C

NEW QUESTION 222

You need to create a Compute Engine instance in a new project that doesn't exist yet. What should you do?

- A. Using the Cloud SDK, create a new project, enable the Compute Engine API in that project, and then create the instance specifying your new project.
- B. Enable the Compute Engine API in the Cloud Console, use the Cloud SDK to create the instance, and then use the `--project` flag to specify a new project.
- C. Using the Cloud SDK, create the new instance, and use the `--project` flag to specify the new project. Answer yes when prompted by Cloud SDK to enable the Compute Engine API.
- D. Enable the Compute Engine API in the Cloud Consol
- E. Go to the Compute Engine section of the Console to create a new instance, and look for the Create In A New Project option in the creation form.

Answer: A

NEW QUESTION 225

You need to monitor resources that are distributed over different projects in Google Cloud Platform. You want to consolidate reporting under the same Stackdriver Monitoring dashboard. What should you do?

- A. Use Shared VPC to connect all projects, and link Stackdriver to one of the projects.
- B. For each project, create a Stackdriver account
- C. In each project, create a service account for that project and grant it the role of Stackdriver Account Editor in all other projects.
- D. Configure a single Stackdriver account, and link all projects to the same account.
- E. Configure a single Stackdriver account for one of the project
- F. In Stackdriver, create a Group and add the other project names as criteria for that Group.

Answer: D

NEW QUESTION 230

You need to configure optimal data storage for files stored in Cloud Storage for minimal cost. The files are used in a mission-critical analytics pipeline that is used continually. The users are in Boston, MA (United States). What should you do?

- A. Configure regional storage for the region closest to the users Configure a Nearline storage class
- B. Configure regional storage for the region closest to the users Configure a Standard storage class
- C. Configure dual-regional storage for the dual region closest to the users Configure a Nearline storage class
- D. Configure dual-regional storage for the dual region closest to the users Configure a Standard storage class

Answer: B

NEW QUESTION 232

Your company has an internal application for managing transactional orders. The application is used exclusively by employees in a single physical location. The application requires strong consistency, fast queries, and ACID guarantees for multi-table transactional updates. The first version of the application is implemented in PostgreSQL, and you want to deploy it to the cloud with minimal code changes. Which database is most appropriate for this application?

- A. BigQuery
- B. Cloud SQL
- C. Cloud Spanner
- D. Cloud Datastore

Answer: B

NEW QUESTION 235

You need to create an autoscaling managed instance group for an HTTPS web application. You want to make sure that unhealthy VMs are recreated. What should you do?

- A. Create a health check on port 443 and use that when creating the Managed Instance Group.
- B. Select Multi-Zone instead of Single-Zone when creating the Managed Instance Group.
- C. In the Instance Template, add the label 'health-check'.
- D. In the Instance Template, add a startup script that sends a heartbeat to the metadata server.

Answer: C

NEW QUESTION 238

You need to enable traffic between multiple groups of Compute Engine instances that are currently running two different GCP projects. Each group of Compute Engine instances is running in its own VPC. What should you do?

- A. Verify that both projects are in a GCP Organizatio
- B. Create a new VPC and add all instances.
- C. Verify that both projects are in a GCP Organizatio
- D. Share the VPC from one project and request that the Compute Engine instances in the other project use this shared VPC.
- E. Verify that you are the Project Administrator of both project
- F. Create two new VPCs and add all instances.
- G. Verify that you are the Project Administrator of both project
- H. Create a new VPC and add all instances.

Answer: B

NEW QUESTION 239

You are working with a Cloud SQL MySQL database at your company. You need to retain a month-end copy of the database for three years for audit purposes. What should you do?

- A. Save file automatic first-of-the- month backup for three years Store the backup file in an Archive class Cloud Storage bucket
- B. Convert the automatic first-of-the-month backup to an export file Write the export file to a Coldlineclass Cloud Storage bucket
- C. Set up an export job for the first of the month Write the export file to an Archive class Cloud Storage bucket
- D. Set up an on-demand backup tor the first of the month Write the backup to an Archive class Cloud Storage bucket

Answer: A

NEW QUESTION 243

Your Dataproc cluster runs in a single Virtual Private Cloud (VPC) network in a single subnet with range 172.16.20.128/25. There are no private IP addresses available in the VPC network. You want to add new VMs to communicate with your cluster using the minimum number of steps. What should you do?

- A. Modify the existing subnet range to 172.16.20.0/24.
- B. Create a new Secondary IP Range in the VPC and configure the VMs to use that range.
- C. Create a new VPC network for the VM
- D. Enable VPC Peering between the VMs' VPC network and the Dataproc cluster VPC network.
- E. Create a new VPC network for the VMs with a subnet of 172.32.0.0/16. Enable VPC network Peering between the Dataproc VPC network and the VMs VPC network
- F. Configure a custom Route exchange.

Answer: B

Explanation:

A subnet has a single primary IP address range and, optionally, one or more secondary IP address ranges. For each subnet IP address range, Google Cloud creates a subnet route. When you use VPC Network Peering, Google Cloud always exchanges the subnet routes that don't use privately reused public IP addresses between the two peered networks. If firewall rules in each network permit communication, VM instances in one network can communicate with instances in the peered network.

NEW QUESTION 246

Your company has a single sign-on (SSO) identity provider that supports Security Assertion Markup Language (SAML) integration with service providers. Your company has users in Cloud Identity. You would like users to authenticate using your company's SSO provider. What should you do?

- A. In Cloud Identity, set up SSO with Google as an identity provider to access custom SAML apps.
- B. In Cloud Identity, set up SSO with a third-party identity provider with Google as a service provider.
- C. Obtain OAuth 2.0 credentials, configure the user consent screen, and set up OAuth 2.0 for Mobile & Desktop Apps.
- D. Obtain OAuth 2.0 credentials, configure the user consent screen, and set up OAuth 2.0 for Web Server Applications.

Answer: C

NEW QUESTION 250

You have been asked to create robust Virtual Private Network (VPN) connectivity between a new Virtual Private Cloud (VPC) and a remote site. Key requirements include dynamic routing, a shared address space of 10.19.0.1/22, and no overprovisioning of tunnels during a failover event. You want to follow Google-recommended practices to set up a high availability Cloud VPN. What should you do?

- A. Use a custom mode VPC network, configure static routes, and use active/passive routing
- B. Use an automatic mode VPC network, configure static routes, and use active/active routing
- C. Use a custom mode VPC network use Cloud Router border gateway protocol (86P) routes, and use active/passive routing
- D. Use an automatic mode VPC network, use Cloud Router border gateway protocol (BGP) routes and configure policy-based routing

Answer: D

NEW QUESTION 253

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questons and Answers in PDF Format

Associate-Cloud-Engineer Practice Exam Features:

- * Associate-Cloud-Engineer Questions and Answers Updated Frequently
- * Associate-Cloud-Engineer Practice Questions Verified by Expert Senior Certified Staff
- * Associate-Cloud-Engineer Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * Associate-Cloud-Engineer Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The Associate-Cloud-Engineer Practice Test Here](#)