

Google

Exam Questions Professional-Cloud-Architect

Google Certified Professional - Cloud Architect (GCP)



NEW QUESTION 1

- (Exam Topic 1)

For this question, refer to the Mountkirk Games case study

Mountkirk Games needs to create a repeatable and configurable mechanism for deploying isolated application environments. Developers and testers can access each other's environments and resources, but they cannot access staging or production resources. The staging environment needs access to some services from production.

What should you do to isolate development environments from staging and production?

- A. Create a project for development and test and another for staging and production.
- B. Create a network for development and test and another for staging and production.
- C. Create one subnetwork for development and another for staging and production.
- D. Create one project for development, a second for staging and a third for production.

Answer: D

NEW QUESTION 2

- (Exam Topic 1)

For this question, refer to the Mountkirk Games case study.

Mountkirk Games' gaming servers are not automatically scaling properly. Last month, they rolled out a new feature, which suddenly became very popular. A record number of users are trying to use the service, but many of them are getting 503 errors and very slow response times. What should they investigate first?

- A. Verify that the database is online.
- B. Verify that the project quota hasn't been exceeded.
- C. Verify that the new feature code did not introduce any performance bugs.
- D. Verify that the load-testing team is not running their tool against production.

Answer: B

Explanation:

503 is service unavailable error. If the database was online everyone would get the 503 error. https://cloud.google.com/docs/quota#capping_usage

NEW QUESTION 3

- (Exam Topic 1)

For this question, refer to the Mountkirk Games case study.

Mountkirk Games wants to set up a continuous delivery pipeline. Their architecture includes many small services that they want to be able to update and roll back quickly. Mountkirk Games has the following requirements:

- Services are deployed redundantly across multiple regions in the US and Europe.
- Only frontend services are exposed on the public internet.
- They can provide a single frontend IP for their fleet of services.
- Deployment artifacts are immutable. Which set of products should they use?

- A. Google Cloud Storage, Google Cloud Dataflow, Google Compute Engine
- B. Google Cloud Storage, Google App Engine, Google Network Load Balancer
- C. Google Kubernetes Registry, Google Container Engine, Google HTTP(S) Load Balancer
- D. Google Cloud Functions, Google Cloud Pub/Sub, Google Cloud Deployment Manager

Answer: C

NEW QUESTION 4

- (Exam Topic 2)

For this question, refer to the TerramEarth case study.

TerramEarth plans to connect all 20 million vehicles in the field to the cloud. This increases the volume to 20 million 600 byte records a second for 40 TB an hour. How should you design the data ingestion?

- A. Vehicles write data directly to GCS.
- B. Vehicles write data directly to Google Cloud Pub/Sub.
- C. Vehicles stream data directly to Google BigQuery.
- D. Vehicles continue to write data using the existing system (FTP).

Answer: B

Explanation:

<https://cloud.google.com/solutions/data-lifecycle-cloud-platform>

<https://cloud.google.com/solutions/designing-connected-vehicle-platform>

NEW QUESTION 5

- (Exam Topic 2)

For this question, refer to the TerramEarth case study.

The TerramEarth development team wants to create an API to meet the company's business requirements. You want the development team to focus their development effort on business value versus creating a custom framework. Which method should they use?

- A. Use Google App Engine with Google Cloud Endpoint
- B. Focus on an API for dealers and partners.
- C. Use Google App Engine with a JAX-RS Jersey Java-based framework
- D. Focus on an API for the public.
- E. Use Google App Engine with the Swagger (open API Specification) framework
- F. Focus on an API for the public.

- G. Use Google Container Engine with a Django Python container
- H. Focus on an API for the public.
- I. Use Google Container Engine with a Tomcat container with the Swagger (Open API Specification) framework
- J. Focus on an API for dealers and partners.

Answer: A

Explanation:

https://cloud.google.com/endpoints/docs/openapi/about-cloud-endpoints?hl=en_US&_ga=2.21787131.-1712523
<https://cloud.google.com/endpoints/docs/openapi/architecture-overview> <https://cloud.google.com/storage/docs/gsutil/commands/test>
 Develop, deploy, protect and monitor your APIs with Google Cloud Endpoints. Using an Open API Specification or one of our API frameworks, Cloud Endpoints gives you the tools you need for every phase of API development.
 From scenario: Business Requirements
 Decrease unplanned vehicle downtime to less than 1 week, without increasing the cost of carrying surplus inventory
 Support the dealer network with more data on how their customers use their equipment to better position new products and services
 Have the ability to partner with different companies – especially with seed and fertilizer suppliers in the fast-growing agricultural business – to create compelling joint offerings for their customers.
 Reference: <https://cloud.google.com/certification/guides/cloud-architect/casestudy-terramearth>

NEW QUESTION 6

- (Exam Topic 2)

Your agricultural division is experimenting with fully autonomous vehicles. You want your architecture to promote strong security during vehicle operation. Which two architecture should you consider?

Choose 2 answers:

- A. Treat every micro service call between modules on the vehicle as untrusted.
- B. Require IPv6 for connectivity to ensure a secure address space.
- C. Use a trusted platform module (TPM) and verify firmware and binaries on boot.
- D. Use a functional programming language to isolate code execution cycles.
- E. Use multiple connectivity subsystems for redundancy.
- F. Enclose the vehicle's drive electronics in a Faraday cage to isolate chips.

Answer: AC


NEW QUESTION 7

- (Exam Topic 2)


For this question, refer to the TerramEarth case study.

TerramEarth's CTO wants to use the raw data from connected vehicles to help identify approximately when a vehicle in the development team to focus their failure. You want to allow analysts to centrally query the vehicle data. Which architecture should you recommend?


A)

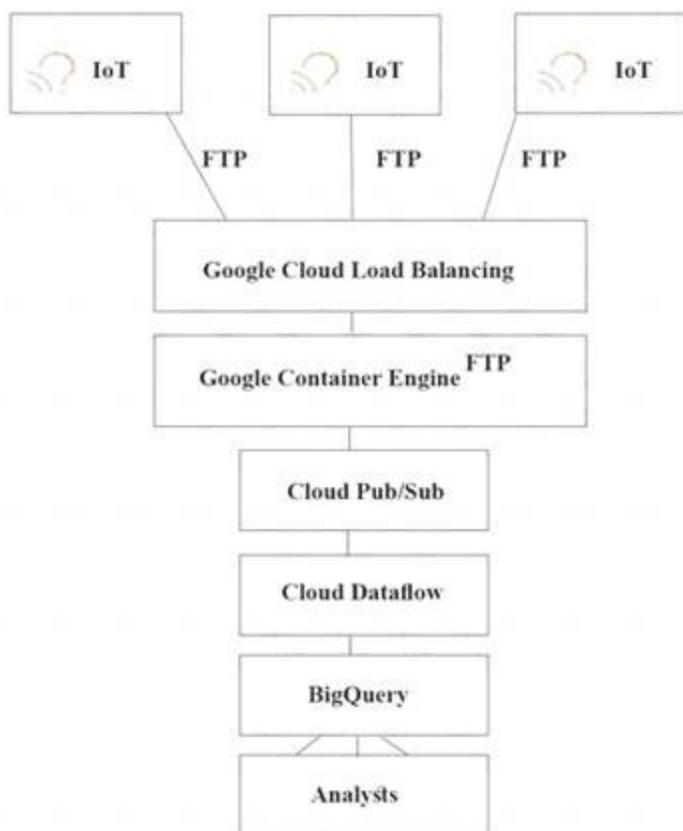


B)

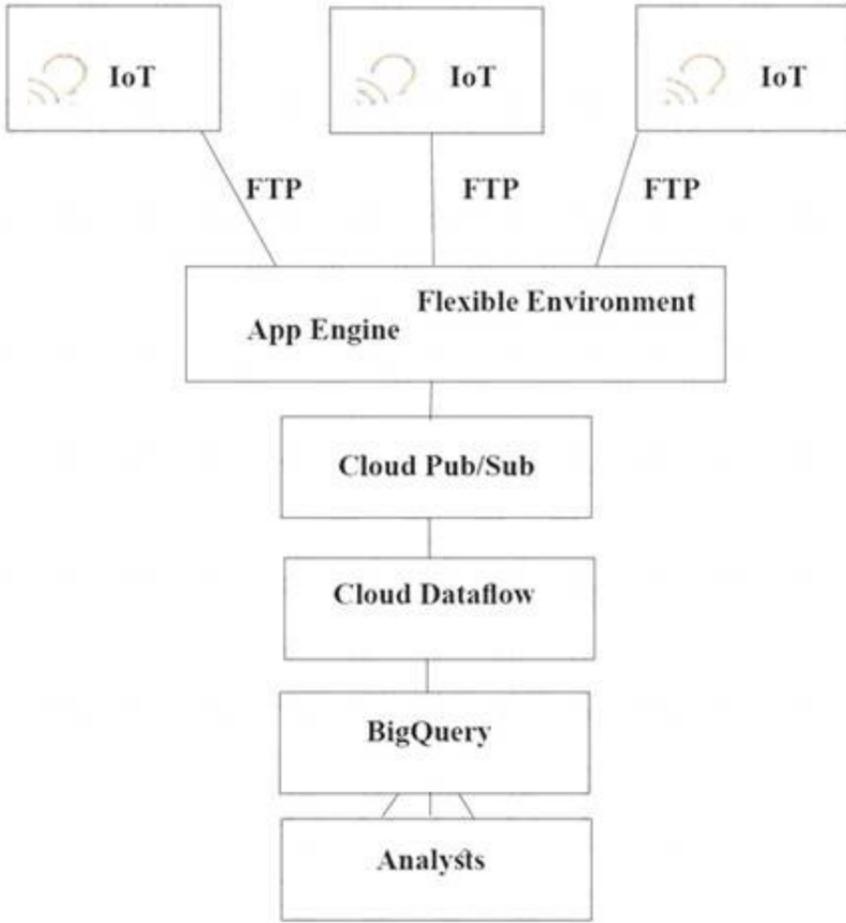

C)

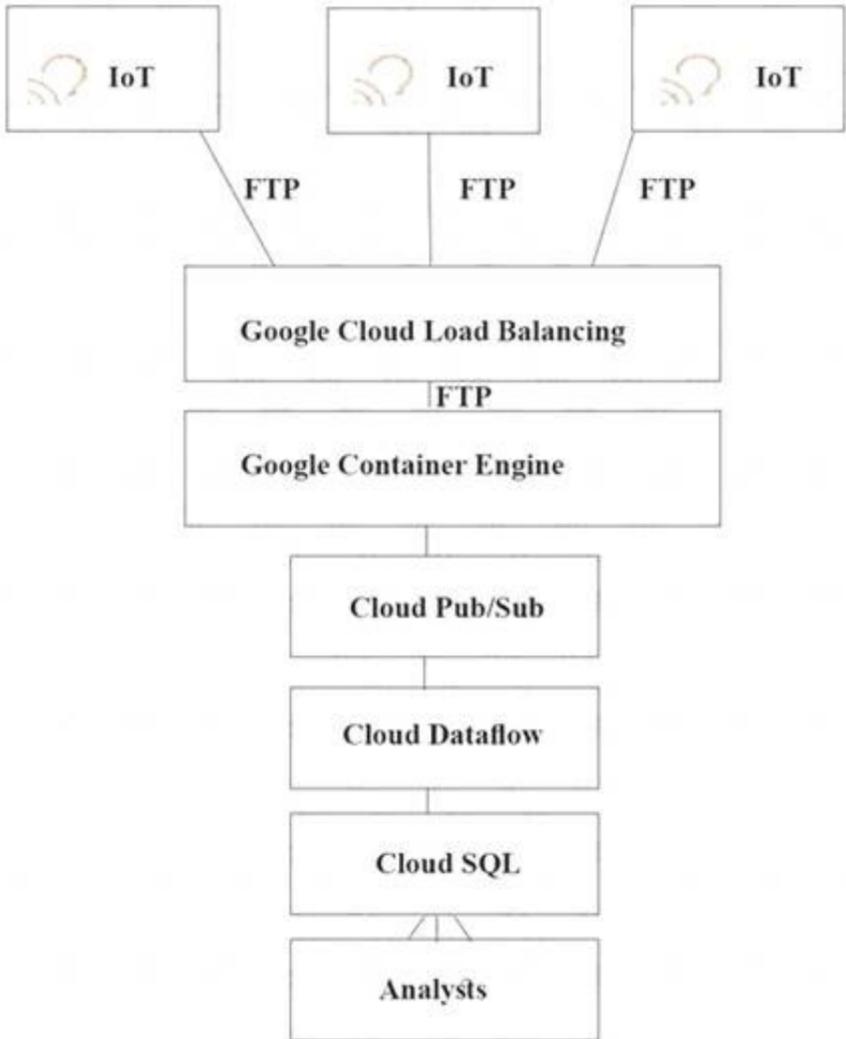

D)

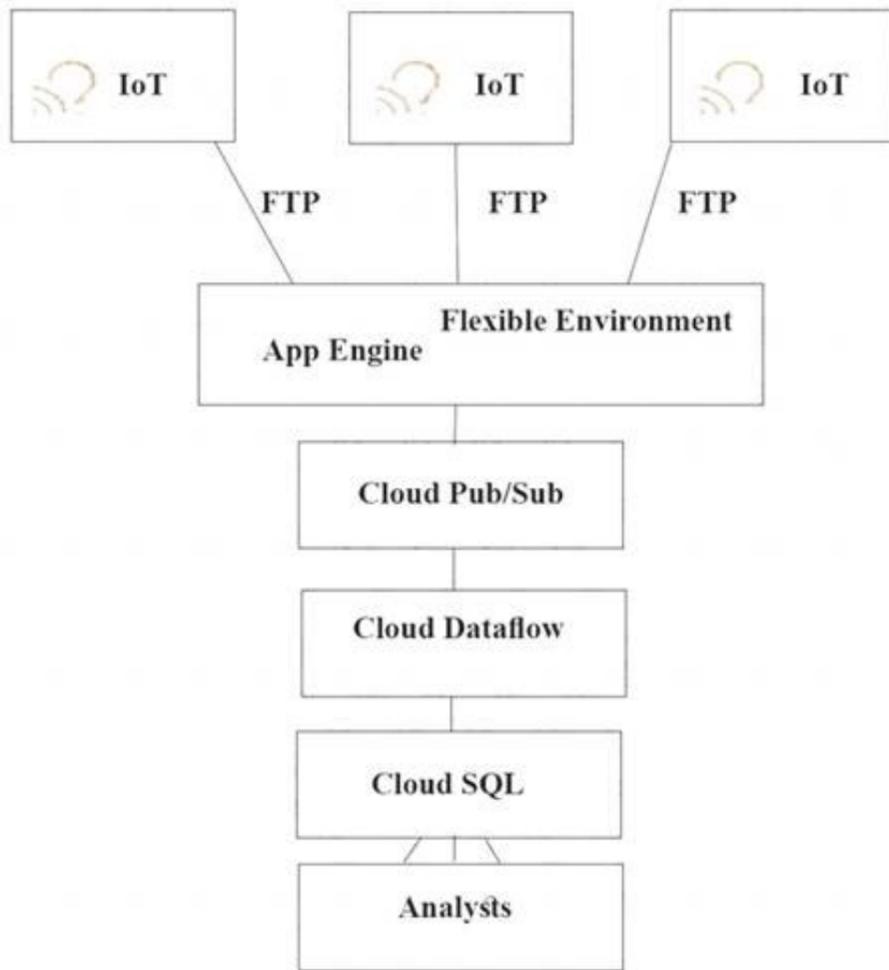


- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: A

Explanation:

<https://cloud.google.com/solutions/iot/> <https://cloud.google.com/solutions/designing-connected-vehicle-platform>
https://cloud.google.com/solutions/designing-connected-vehicle-platform#data_ingestion
<http://www.eweek.com/big-data-and-analytics/google-touts-value-of-cloud-iot-core-for-analyzing-connected-car-data>
<https://cloud.google.com/solutions/iot/> The push endpoint can be a load balancer. A container cluster can be used. Cloud Pub/Sub for Stream Analytics

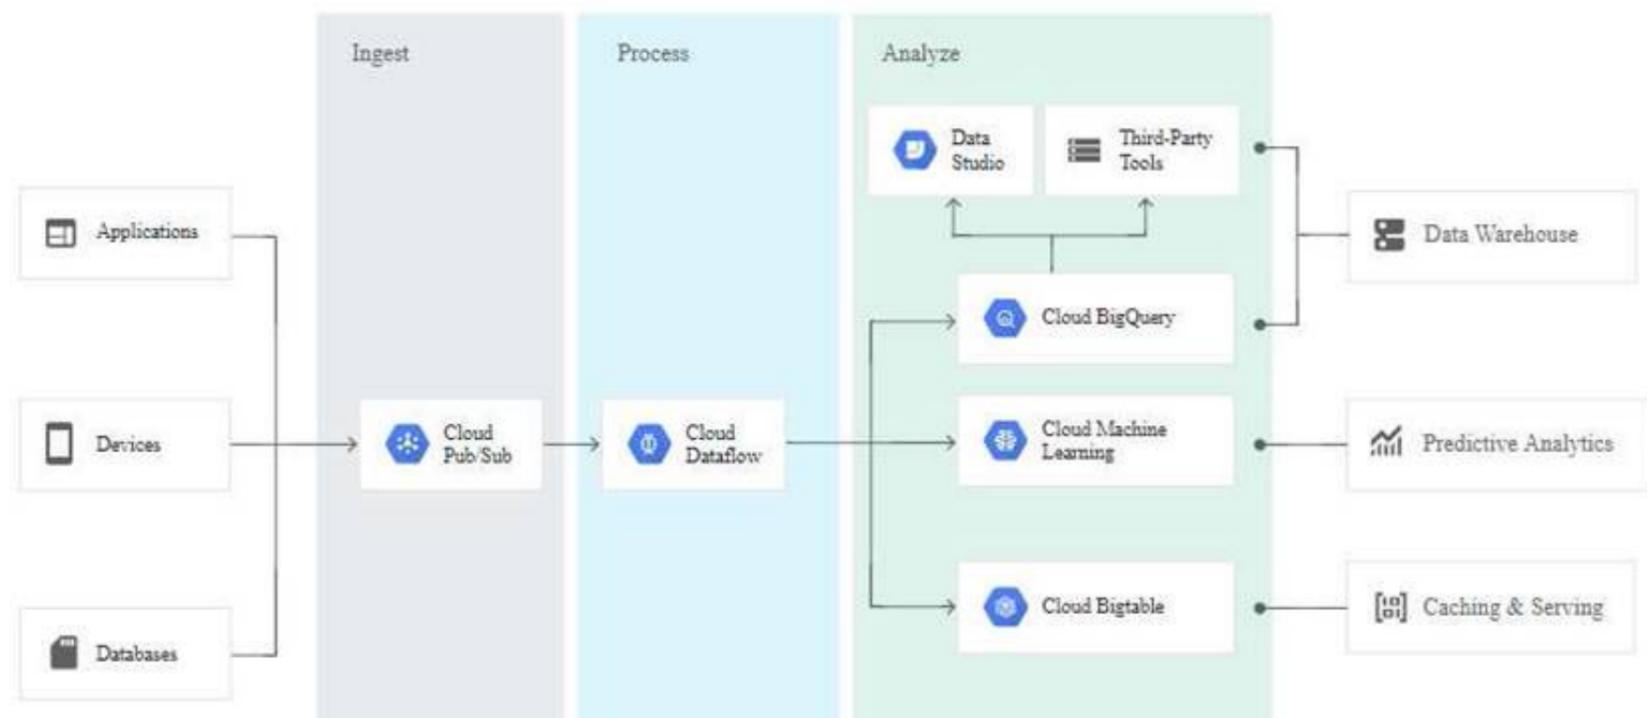

References: <https://cloud.google.com/pubsub/> <https://cloud.google.com/solutions/iot/> <https://cloud.google.com/solutions/designing-connected-vehicle-platform>
https://cloud.google.com/solutions/designing-connected-vehicle-platform#data_ingestion
<http://www.eweek.com/big-data-and-analytics/google-touts-value-of-cloud-iot-core-for-analyzing-connected-car>
<https://cloud.google.com/solutions/iot/>

NEW QUESTION 8

- (Exam Topic 2)

For this question, refer to the TerramEarth case study

Your development team has created a structured API to retrieve vehicle data. They want to allow third parties to develop tools for dealerships that use this vehicle event data. You want to support delegated authorization against this data. What should you do?

- A. Build or leverage an OAuth-compatible access control system.

- B. Build SAML 2.0 SSO compatibility into your authentication system.
- C. Restrict data access based on the source IP address of the partner systems.
- D. Create secondary credentials for each dealer that can be given to the trusted third party.

Answer: A

Explanation:

<https://cloud.google.com/appengine/docs/flexible/go/authorizing-apps> https://cloud.google.com/docs/enterprise/best-practices-for-enterprise-organizations#delegate_application_auth Delegate application authorization with OAuth2

Cloud Platform APIs support OAuth 2.0, and scopes provide granular authorization over the methods that are supported. Cloud Platform supports both service-account and user-account OAuth, also called three-legged OAuth.

References:

https://cloud.google.com/docs/enterprise/best-practices-for-enterprise-organizations#delegate_application_auth

<https://cloud.google.com/appengine/docs/flexible/go/authorizing-apps>

NEW QUESTION 9

- (Exam Topic 2)

For this question, refer to the TerramEarth case study.

To speed up data retrieval, more vehicles will be upgraded to cellular connections and be able to transmit data to the ETL process. The current FTP process is error-prone and restarts the data transfer from the start of the file when connections fail, which happens often. You want to improve the reliability of the solution and minimize data transfer time on the cellular connections. What should you do?

- A. Use one Google Container Engine cluster of FTP server
- B. Save the data to a Multi-Regional bucket
- C. Run the ETL process using data in the bucket.
- D. Use multiple Google Container Engine clusters running FTP servers located in different region
- E. Save the data to Multi-Regional buckets in us, eu, and asi
- F. Run the ETL process using the data in the bucket.
- G. Directly transfer the files to different Google Cloud Multi-Regional Storage bucket locations in us, eu, and asia using Google APIs over HTTP(S). Run the ETL process using the data in the bucket.
- H. Directly transfer the files to a different Google Cloud Regional Storage bucket location in us, eu, and asia using Google APIs over HTTP(S). Run the ETL process to retrieve the data from each Regional bucket.

Answer: D

Explanation:

<https://cloud.google.com/storage/docs/locations>

NEW QUESTION 10

- (Exam Topic 2)

For this question, refer to the TerramEarth case study.

TerramEarth's 20 million vehicles are scattered around the world. Based on the vehicle's location its telemetry data is stored in a Google Cloud Storage (GCS) regional bucket (US, Europe, or Asia). The CTO has asked you to run a report on the raw telemetry data to determine why vehicles are breaking down after 100 K miles. You want to run this job on all the data. What is the most cost-effective way to run this job?

- A. Move all the data into 1 zone, then launch a Cloud Dataproc cluster to run the job.
- B. Move all the data into 1 region, then launch a Google Cloud Dataproc cluster to run the job.
- C. Launch a cluster in each region to preprocess and compress the raw data, then move the data into a multi region bucket and use a Dataproc cluster to finish the job.
- D. Launch a cluster in each region to preprocess and compress the raw data, then move the data into a region bucket and use a Cloud Dataproc cluster to finish the job.

Answer: D

Explanation:

Storage guarantees 2 replicates which are geo diverse (100 miles apart) which can get better remote latency and availability.

More importantly, is that multiregional heavily leverages Edge caching and CDNs to provide the content to the end users.

All this redundancy and caching means that Multiregional comes with overhead to sync and ensure consistency between geo-diverse areas. As such, it's much better for write-once-read-many scenarios. This means frequently accessed (e.g. "hot" objects) around the world, such as website content, streaming videos, gaming or mobile applications.

References:

<https://medium.com/google-cloud/google-cloud-storage-what-bucket-class-for-the-best-performance-5c847ac8f>

NEW QUESTION 10

- (Exam Topic 3)

For this question, refer to the JencoMart case study.

JencoMart has decided to migrate user profile storage to Google Cloud Datastore and the application servers to Google Compute Engine (GCE). During the migration, the existing infrastructure will need access to Datastore to upload the data. What service account key-management strategy should you recommend?

- A. Provision service account keys for the on-premises infrastructure and for the GCE virtual machines (VMs).
- B. Authenticate the on-premises infrastructure with a user account and provision service account keys for the VMs.
- C. Provision service account keys for the on-premises infrastructure and use Google Cloud Platform (GCP) managed keys for the VMs
- D. Deploy a custom authentication service on GCE/Google Container Engine (GKE) for the on-premises infrastructure and use GCP managed keys for the VMs.

Answer: A

Explanation:

<https://cloud.google.com/iam/docs/understanding-service-accounts>

Migrating data to Google Cloud Platform

Let's say that you have some data processing that happens on another cloud provider and you want to transfer the processed data to Google Cloud Platform. You

can use a service account from the virtual machines on the external cloud to push the data to Google Cloud Platform. To do this, you must create and download a service account key when you create the service account and then use that key from the external process to call the Cloud Platform APIs.

References:

https://cloud.google.com/iam/docs/understanding-service-accounts#migrating_data_to_google_cloud_platform

NEW QUESTION 14

- (Exam Topic 4)

For this question, refer to the Dress4Win case study.

Dress4Win has asked you for advice on how to migrate their on-premises MySQL deployment to the cloud. They want to minimize downtime and performance impact to their on-premises solution during the migration. Which approach should you recommend?

- A. Create a dump of the on-premises MySQL master server, and then shut it down, upload it to the cloud environment, and load into a new MySQL cluster.
- B. Setup a MySQL replica server/slave in the cloud environment, and configure it for asynchronous replication from the MySQL master server on-premises until cutover.
- C. Create a new MySQL cluster in the cloud, configure applications to begin writing to both on-premises and cloud MySQL masters, and destroy the original cluster at cutover.
- D. Create a dump of the MySQL replica server into the cloud environment, load it into: Google Cloud Datastore, and configure applications to read/write to Cloud Datastore at cutover.

Answer: B

NEW QUESTION 16

- (Exam Topic 4)

For this question, refer to the Dress4Win case study.

You want to ensure Dress4Win's sales and tax records remain available for infrequent viewing by auditors for at least 10 years. Cost optimization is your top priority. Which cloud services should you choose?

- A. Google Cloud Storage Coldline to store the data, and gsutil to access the data.
- B. Google Cloud Storage Nearline to store the data, and gsutil to access the data.
- C. Google Bigtable with US or EU as location to store the data, and gcloud to access the data.
- D. BigQuery to store the data, and a web server cluster in a managed instance group to access the data. Google Cloud SQL mirrored across two distinct regions to store the data, and a Redis cluster in a managed instance group to access the data.

Answer: A

Explanation:

References: <https://cloud.google.com/storage/docs/storage-classes>

NEW QUESTION 21

- (Exam Topic 4)

For this question, refer to the Dress4Win case study.

Dress4Win has end-to-end tests covering 100% of their endpoints. They want to ensure that the move to the cloud does not introduce any new bugs. Which additional testing methods should the developers employ to prevent an outage?

- A. They should enable Google Stackdriver Debugger on the application code to show errors in the code.
- B. They should add additional unit tests and production scale load tests on their cloud staging environment.
- C. They should run the end-to-end tests in the cloud staging environment to determine if the code is working as intended.
- D. They should add canary tests so developers can measure how much of an impact the new release causes to latency.

Answer: B

NEW QUESTION 23

- (Exam Topic 5)

As part of implementing their disaster recovery plan, your company is trying to replicate their production MySQL database from their private data center to their GCP project using a Google Cloud VPN connection. They are experiencing latency issues and a small amount of packet loss that is disrupting the replication.

What

should they do?

- A. Configure their replication to use UDP.
- B. Configure a Google Cloud Dedicated Interconnect.
- C. Restore their database daily using Google Cloud SQL.
- D. Add additional VPN connections and load balance them.
- E. Send the replicated transaction to Google Cloud Pub/Sub.

Answer: B

NEW QUESTION 25

- (Exam Topic 5)

Your applications will be writing their logs to BigQuery for analysis. Each application should have its own table.

Any logs older than 45 days should be removed. You want to optimize storage and follow Google recommended practices. What should you do?

- A. Configure the expiration time for your tables at 45 days
- B. Make the tables time-partitioned, and configure the partition expiration at 45 days
- C. Rely on BigQuery's default behavior to prune application logs older than 45 days
- D. Create a script that uses the BigQuery command line tool (bq) to remove records older than 45 days

Answer: B

Explanation:

<https://cloud.google.com/bigquery/docs/managing-partitioned-tables>

NEW QUESTION 30

- (Exam Topic 5)

You have an application deployed on Kubernetes Engine using a Deployment named echo-deployment. The deployment is exposed using a Service called echo-service. You need to perform an update to the application with minimal downtime to the application. What should you do?

- A. Use kubectl set image deployment/echo-deployment <new-image>
- B. Use the rolling update functionality of the Instance Group behind the Kubernetes cluster
- C. Update the deployment yaml file with the new container image
- D. Use kubectl delete deployment/echo-deployment and kubectl create -f <yaml-file>
- E. Update the service yaml file with the new container image
- F. Use kubectl delete service/echoservice and kubectl create -f <yaml-file>

Answer: A

Explanation:

https://cloud.google.com/kubernetes-engine/docs/how-to/updating-apps#updating_an_application

NEW QUESTION 33

- (Exam Topic 5)

Google Cloud Platform resources are managed hierarchically using organization, folders, and projects. When Cloud Identity and Access Management (IAM) policies exist at these different levels, what is the effective policy at a particular node of the hierarchy?

- A. The effective policy is determined only by the policy set at the node
- B. The effective policy is the policy set at the node and restricted by the policies of its ancestors
- C. The effective policy is the union of the policy set at the node and policies inherited from its ancestors
- D. The effective policy is the intersection of the policy set at the node and policies inherited from its ancestors

Answer: B

Explanation:

Reference: <https://cloud.google.com/resource-manager/docs/cloud-platform-resource-hierarchy>

NEW QUESTION 36

- (Exam Topic 5)

Your company has decided to build a backup replica of their on-premises user authentication PostgreSQL database on Google Cloud Platform. The database is 4 TB, and large updates are frequent. Replication requires private address space communication. Which networking approach should you use?

- A. Google Cloud Dedicated Interconnect
- B. Google Cloud VPN connected to the data center network
- C. A NAT and TLS translation gateway installed on-premises
- D. A Google Compute Engine instance with a VPN server installed connected to the data center network

Answer: A

Explanation:

<https://cloud.google.com/docs/enterprise/best-practices-for-enterprise-organizations>

Google Cloud Dedicated Interconnect provides direct physical connections and RFC 1918 communication between your on-premises network and Google's network. Dedicated Interconnect enables you to transfer large amounts of data between networks, which can be more cost effective than purchasing additional bandwidth over the public Internet or using VPN tunnels.

Benefits:

- Traffic between your on-premises network and your VPC network doesn't traverse the public Internet. Traffic traverses a dedicated connection with fewer hops, meaning there are less points of failure where traffic might get dropped or disrupted.
- Your VPC network's internal (RFC 1918) IP addresses are directly accessible from your on-premises network. You don't need to use a NAT device or VPN tunnel to reach internal IP addresses. Currently, you can only reach internal IP addresses over a dedicated connection. To reach Google external IP addresses, you must use a separate connection.
- You can scale your connection to Google based on your needs. Connection capacity is delivered over one or more 10 Gbps Ethernet connections, with a maximum of eight connections (80 Gbps total per interconnect).
- The cost of egress traffic from your VPC network to your on-premises network is reduced. A dedicated connection is generally the least expensive method if you have a high-volume of traffic to and from Google's network.

References: <https://cloud.google.com/interconnect/docs/details/dedicated>

NEW QUESTION 40

- (Exam Topic 5)

A lead engineer wrote a custom tool that deploys virtual machines in the legacy data center. He wants to migrate the custom tool to the new cloud environment. You want to advocate for the adoption of Google Cloud Deployment Manager. What are two business risks of migrating to Cloud Deployment Manager? Choose 2 answers.

- A. Cloud Deployment Manager uses Python.
- B. Cloud Deployment Manager APIs could be deprecated in the future.
- C. Cloud Deployment Manager is unfamiliar to the company's engineers.
- D. Cloud Deployment Manager requires a Google APIs service account to run.
- E. Cloud Deployment Manager can be used to permanently delete cloud resources.
- F. Cloud Deployment Manager only supports automation of Google Cloud resources.

Answer: CF

Explanation:

<https://cloud.google.com/deployment-manager/docs/deployments/deleting-deployments>

NEW QUESTION 42

- (Exam Topic 5)

Your company has successfully migrated to the cloud and wants to analyze their data stream to optimize operations. They do not have any existing code for this analysis, so they are exploring all their options. These options include a mix of batch and stream processing, as they are running some hourly jobs and live-processing some data as it comes in. Which technology should they use for this?

- A. Google Cloud Dataproc
- B. Google Cloud Dataflow
- C. Google Container Engine with Bigtable
- D. Google Compute Engine with Google BigQuery

Answer: B

Explanation:

Dataflow is for processing both the Batch and Stream.

Cloud Dataflow is a fully-managed service for transforming and enriching data in stream (real time) and batch (historical) modes with equal reliability and expressiveness -- no more complex workarounds or compromises needed.

References: <https://cloud.google.com/dataflow/>

NEW QUESTION 47

- (Exam Topic 5)

Your company has developed a monolithic, 3-tier application to allow external users to upload and share files. The solution cannot be easily enhanced and lacks reliability. The development team would like to re-architect the application to adopt microservices and a fully managed service approach, but they need to convince their leadership that the effort is worthwhile. Which advantage(s) should they highlight to leadership?

- A. The new approach will be significantly less costly, make it easier to manage the underlying infrastructure, and automatically manage the CI/CD pipelines.
- B. The monolithic solution can be converted to a container with Docker.
- C. The generated container can then be deployed into a Kubernetes cluster.
- D. The new approach will make it easier to decouple infrastructure from application, develop and release new features, manage the underlying infrastructure, manage CI/CD pipelines and perform A/B testing, and scale the solution if necessary.
- E. The process can be automated with Migrate for Compute Engine.

Answer: C

Explanation:

The new approach will make it easier to decouple infrastructure from an application, develop and release new features, manage the underlying infrastructure, manage CI/CD pipelines and perform A/B testing, and scale the solution if necessary.

NEW QUESTION 48

- (Exam Topic 5)

You want to enable your running Google Kubernetes Engine cluster to scale as demand for your application changes. What should you do?

- A. Add additional nodes to your Kubernetes Engine cluster using the following command: `gcloud container clusters resize CLUSTER_Name --size 10`
- B. Add a tag to the instances in the cluster with the following command: `gcloud compute instances add-tags INSTANCE --tags enable-autoscaling max-nodes=10`
- C. Update the existing Kubernetes Engine cluster with the following command: `gcloud alpha container clusters update mycluster --enable-autoscaling --min-nodes=1 --max-nodes=10`
- D. Create a new Kubernetes Engine cluster with the following command: `gcloud alpha container clusters create mycluster --enable-autoscaling --min-nodes=1 --max-nodes=10` and redeploy your application

Answer: C

Explanation:

<https://cloud.google.com/kubernetes-engine/docs/concepts/cluster-autoscaler> To enable autoscaling for an existing node pool, run the following command:
`gcloud container clusters update [CLUSTER_NAME] --enable-autoscaling --min-nodes 1 --max-nodes 10 --zone [COMPUTE_ZONE] --node-pool default-pool`

NEW QUESTION 50

- (Exam Topic 5)

You have an App Engine application that needs to be updated. You want to test the update with production traffic before replacing the current application version. What should you do?

- A. Deploy the update using the Instance Group Updater to create a partial rollout, which allows for canary testing.
- B. Deploy the update as a new version in the App Engine application, and split traffic between the new and current versions.
- C. Deploy the update in a new VPC, and use Google's global HTTP load balancing to split traffic between the update and current applications.
- D. Deploy the update as a new App Engine application, and use Google's global HTTP load balancing to split traffic between the new and current applications.

Answer: B

Explanation:

<https://cloud.google.com/appengine/docs/standard/python/splitting-traffic>

NEW QUESTION 54

- (Exam Topic 5)

Your company creates rendering software which users can download from the company website. Your company has customers all over the world. You want to minimize latency for all your customers. You want to follow Google-recommended practices. How should you store the files?

- A. Save the files in a Multi-Regional Cloud Storage bucket.
- B. Save the files in a Regional Cloud Storage bucket, one bucket per zone of the region.
- C. Save the files in multiple Regional Cloud Storage buckets, one bucket per zone per region.
- D. Save the files in multiple Multi-Regional Cloud Storage buckets, one bucket per multi-region.

Answer: A

Explanation:

<https://cloud.google.com/storage/docs/locations#location-mr>

NEW QUESTION 56

- (Exam Topic 5)

You deploy your custom java application to google app engine. It fails to deploy and gives you the following stack trace:

```
Java.lang.securityException : SHA1 digest

At com.google.appengine.runtime.Request.pr

At

Sun.securityutil.manifestEntryVerifier.ver

At java.net.URLClassLoader.defineCla

At sun.reflect.GeneratedMethodAccessors

At

Sun.reflect.DelegatingMethodAccesorImpl.

At java.lang.reflect.MThod.invoke
```

- A. Recompile the CLoakedServlet class using and MD5 hash instead of SHA1
- B. Digitally sign all of your JAR files and redeploy your application.
- C. Upload missing JAR files and redeploy your application

Answer: B

NEW QUESTION 61

- (Exam Topic 5)

You are using a single Cloud SQL instance to serve your application from a specific zone. You want to introduce high availability. What should you do?

- A. Create a read replica instance in a different region
- B. Create a failover replica instance in a different region
- C. Create a read replica instance in the same region, but in a different zone
- D. Create a failover replica instance in the same region, but in a different zone

Answer: B

Explanation:

<https://cloud.google.com/sql/docs/mysql/high-availability>

NEW QUESTION 66

- (Exam Topic 5)

Your company has multiple on-premises systems that serve as sources for reporting. The data has not been maintained well and has become degraded over time. You want to use Google-recommended practices to detect anomalies in your company data. What should you do?

- A. Upload your files into Cloud Storang
- B. Use Cloud Datalab to explore and clean your data.
- C. Upload your files into Cloud Storang
- D. Use Cloud Dataprep to explore and clean your data.
- E. Connect Cloud Datalab to your on-premises system

- F. Use Cloud Datalab to explore and clean your data.
- G. Connect Cloud Dataprep to your on-premises system
- H. Use Cloud Dataprep to explore and clean your data.

Answer: B

Explanation:

<https://cloud.google.com/dataprep/>

NEW QUESTION 67

- (Exam Topic 5)

Your company has sensitive data in Cloud Storage buckets. Data analysts have Identity Access Management (IAM) permissions to read the buckets. You want to prevent data analysts from retrieving the data in the buckets from outside the office network. What should you do?

- A. * 1. Create a VPC Service Controls perimeter that includes the projects with the buckets.* 2. Create an access level with the CIDR of the office network.
- B. * 1. Create a firewall rule for all instances in the Virtual Private Cloud (VPC) network for source range.* 2. Use the Classless Inter-domain Routing (CIDR) of the office network.
- C. * 1. Create a Cloud Function to remove IAM permissions from the buckets, and another Cloud Function to add IAM permissions to the buckets.* 2. Schedule the Cloud Functions with Cloud Scheduler to add permissions at the start of business and remove permissions at the end of business.
- D. * 1. Create a Cloud VPN to the office network.* 2. Configure Private Google Access for on-premises hosts.

Answer: A

Explanation:

For all Google Cloud services secured with VPC Service Controls, you can ensure that: Resources within a perimeter are accessed only from clients within authorized VPC networks using Private Google Access with either Google Cloud or on-premises. <https://cloud.google.com/vpc-service-controls/docs/overview>
<https://cloud.google.com/vpc-service-controls/docs/overview>. You create a service control across your VPC and any cloud bucket or any project resource to restrict access. Anything outside of it can't access the resources within service control perimeter

NEW QUESTION 68

- (Exam Topic 5)

Your company is designing its data lake on Google Cloud and wants to develop different ingestion pipelines to collect unstructured data from different sources. After the data is stored in Google Cloud, it will be processed in several data pipelines to build a recommendation engine for end users on the website. The structure of the data retrieved from the source systems can change at any time. The data must be stored exactly as it was retrieved for reprocessing purposes in case the data structure is incompatible with the current processing pipelines. You need to design an architecture to support the use case after you retrieve the data. What should you do?

- A. Send the data through the processing pipeline, and then store the processed data in a BigQuery table for reprocessing.
- B. Store the data in a BigQuery table
- C. Design the processing pipelines to retrieve the data from the table.
- D. Send the data through the processing pipeline, and then store the processed data in a Cloud Storage bucket for reprocessing.
- E. Store the data in a Cloud Storage bucket
- F. Design the processing pipelines to retrieve the data from the bucket

Answer: D

NEW QUESTION 71

- (Exam Topic 5)

Your company's test suite is a custom C++ application that runs tests throughout each day on Linux virtual machines. The full test suite takes several hours to complete, running on a limited number of on-premises servers reserved for testing. Your company wants to move the testing infrastructure to the cloud, to reduce the amount of time it takes to fully test a change to the system, while changing the tests as little as possible. Which cloud infrastructure should you recommend?

- A. Google Compute Engine unmanaged instance groups and Network Load Balancer
- B. Google Compute Engine managed instance groups with auto-scaling
- C. Google Cloud Dataproc to run Apache Hadoop jobs to process each test
- D. Google App Engine with Google Stackdriver for logging

Answer: B

Explanation:

<https://cloud.google.com/compute/docs/instance-groups/>

Google Compute Engine enables users to launch virtual machines (VMs) on demand. VMs can be launched from the standard images or custom images created by users.

Managed instance groups offer autoscaling capabilities that allow you to automatically add or remove instances from a managed instance group based on increases or decreases in load. Autoscaling helps your applications gracefully handle increases in traffic and reduces cost when the need for resources is lower.

NEW QUESTION 73

- (Exam Topic 5)

Your company acquired a healthcare startup and must retain its customers' medical information for up to 4 more years, depending on when it was created. Your corporate policy is to securely retain this data, and then delete it as soon as regulations allow. Which approach should you take?

- A. Store the data in Google Drive and manually delete records as they expire.
- B. Anonymize the data using the Cloud Data Loss Prevention API and store it indefinitely.
- C. Store the data using the Cloud Storage and use lifecycle management to delete files when they expire.
- D. Store the data in Cloud Storage and run a nightly batch script that deletes all expired data.

Answer: C

Explanation:

<https://cloud.google.com/storage/docs/lifecycle>

NEW QUESTION 74

- (Exam Topic 5)

You are developing a globally scaled frontend for a legacy streaming backend data API. This API expects events in strict chronological order with no repeat data for proper processing.

Which products should you deploy to ensure guaranteed-once FIFO (first-in, first-out) delivery of data?

- A. Cloud Pub/Sub alone
- B. Cloud Pub/Sub to Cloud DataFlow
- C. Cloud Pub/Sub to Stackdriver
- D. Cloud Pub/Sub to Cloud SQL

Answer: B

Explanation:

Reference <https://cloud.google.com/pubsub/docs/ordering>

NEW QUESTION 75

- (Exam Topic 5)

Your company runs several databases on a single MySQL instance. They need to take backups of a specific database at regular intervals. The backup activity needs to complete as quickly as possible and cannot be allowed to impact disk performance. How should you configure the storage?

- A. Configure a cron job to use the gcloud tool to take regular backups using persistent disk snapshots.
- B. Mount a Local SSD volume as the backup location.
- C. After the backup is complete, use gsutil to move the backup to Google Cloud Storage.
- D. Use gcsfuse to mount a Google Cloud Storage bucket as a volume directly on the instance and write backups to the mounted location using mysqldump.
- E. Mount additional persistent disk volumes onto each virtual machine (VM) instance in a RAID10 array and use LVM to create snapshots to send to Cloud Storage.

Answer: B

Explanation:

<https://cloud.google.com/compute/docs/instances/sql-server/best-practices>

NEW QUESTION 80

- (Exam Topic 5)

Your application needs to process credit card transactions. You want the smallest scope of Payment Card Industry (PCI) compliance without compromising the ability to analyze transactional data and trends relating to which payment methods are used. How should you design your architecture?

- A. Create a tokenizer service and store only tokenized data.
- B. Create separate projects that only process credit card data.
- C. Create separate subnetworks and isolate the components that process credit card data.
- D. Streamline the audit discovery phase by labeling all of the virtual machines (VMs) that process PCI data.
- E. Enable Logging export to Google BigQuery and use ACLs and views to scope the data shared with the auditor.

Answer: A

Explanation:

<https://cloud.google.com/solutions/pci-dss-compliance-in-gcp>

NEW QUESTION 82

- (Exam Topic 5)

Your company is moving 75 TB of data into Google Cloud. You want to use Cloud Storage and follow Google-recommended practices. What should you do?

- A. Move your data onto a Transfer Appliance.
- B. Use a Transfer Appliance Rehydrator to decrypt the data into Cloud Storage.
- C. Move your data onto a Transfer Appliance.
- D. Use Cloud Dataprep to decrypt the data into Cloud Storage.
- E. Install gsutil on each server that contains data.
- F. Use resumable transfers to upload the data into Cloud Storage.
- G. Install gsutil on each server containing data.
- H. Use streaming transfers to upload the data into Cloud Storage.

Answer: A

Explanation:

<https://cloud.google.com/transfer-appliance/docs/2.0/faq>

NEW QUESTION 86

- (Exam Topic 5)

Auditors visit your teams every 12 months and ask to review all the Google Cloud Identity and Access Management (Cloud IAM) policy changes in the previous 12 months. You want to streamline and expedite the analysis and audit process. What should you do?

- A. Create custom Google Stackdriver alerts and send them to the auditor.
- B. Enable Logging export to Google BigQuery and use ACLs and views to scope the data shared with the auditor.

- C. Use cloud functions to transfer log entries to Google Cloud SQL and use ACLS and views to limit an auditor's view.
- D. Enable Google Cloud Storage (GCS) log export to audit logs into a GCS bucket and delegate access to the bucket.

Answer: D

Explanation:

Export the logs to Google Cloud Storage bucket - Archive Storage, as it will not be used for 1 year, price for which is \$0.004 per GB per Month. The price for long term storage in BigQuery is \$0.01 per GB per Month (250% more). Also for analysis purpose, whenever Auditors are there (once per year), you can use BigQuery and use GCS bucket as external data source. BigQuery supports querying Cloud Storage data from these storage classes:
Standard Nearline Coldline Archive

NEW QUESTION 90

- (Exam Topic 5)

Your company wants to try out the cloud with low risk. They want to archive approximately 100 TB of their log data to the cloud and test the analytics features available to them there, while also retaining that data as a long-term disaster recovery backup. Which two steps should they take? Choose 2 answers

- A. Load logs into Google BigQuery.
- B. Load logs into Google Cloud SQL.
- C. Import logs into Google Stackdriver.
- D. Insert logs into Google Cloud Bigtable.
- E. Upload log files into Google Cloud Storage.

Answer: AE

NEW QUESTION 93

- (Exam Topic 5)

Your company uses the Firewall Insights feature in the Google Network Intelligence Center. You have several firewall rules applied to Compute Engine instances. You need to evaluate the efficiency of the applied firewall ruleset. When you bring up the Firewall Insights page in the Google Cloud Console, you notice that there are no log rows to display. What should you do to troubleshoot the issue?

- A. Enable Virtual Private Cloud (VPC) flow logging.
- B. Enable Firewall Rules Logging for the firewall rules you want to monitor.
- C. Verify that your user account is assigned the compute.networkAdmin Identity and Access Management (IAM) role.
- D. Install the Google Cloud SDK, and verify that there are no Firewall logs in the command line output.

Answer: B

Explanation:

Reference: <https://cloud.google.com/network-intelligence-center/docs/firewall-insights/how-to/using-firewall-insights>

NEW QUESTION 94

- (Exam Topic 5)

You are designing a Data Warehouse on Google Cloud and want to store sensitive data in BigQuery. Your company requires you to generate encryption keys outside of Google Cloud. You need to implement a solution. What should you do?

- A. Generate a new key in Cloud Key Management Service (Cloud KMS). Store all data in Cloud Storage using the customer-managed key option and select the created key
- B. Set up a Dataflow pipeline to decrypt the data and to store it in a BigQuery dataset.
- C. Generate a new key in Cloud Key Management Service (Cloud KMS). Create a dataset in BigQuery using the customer-managed key option and select the created key
- D. Import a key in Cloud KM
- E. Store all data in Cloud Storage using the customer-managed key option and select the created key
- F. Set up a Dataflow pipeline to decrypt the data and to store it in a new BigQuery dataset.
- G. Import a key in Cloud KM
- H. Create a dataset in BigQuery using the customer-supplied key option and select the created key.

Answer: D

Explanation:

<https://cloud.google.com/bigquery/docs/customer-managed-encryption>

NEW QUESTION 99

- (Exam Topic 5)

You need to migrate Hadoop jobs for your company's Data Science team without modifying the underlying infrastructure. You want to minimize costs and infrastructure management effort. What should you do?

- A. Create a Dataproc cluster using standard worker instances.
- B. Create a Dataproc cluster using preemptible worker instances.
- C. Manually deploy a Hadoop cluster on Compute Engine using standard instances.
- D. Manually deploy a Hadoop cluster on Compute Engine using preemptible instances.

Answer: B

Explanation:

Reference: <https://cloud.google.com/architecture/hadoop/hadoop-gcp-migration-jobs>

NEW QUESTION 103

- (Exam Topic 5)

You are designing an application for use only during business hours. For the minimum viable product release, you'd like to use a managed product that automatically "scales to zero" so you don't incur costs when there is no activity.

Which primary compute resource should you choose?

- A. Cloud Functions
- B. Compute Engine
- C. Kubernetes Engine
- D. AppEngine flexible environment

Answer: A

Explanation:

<https://cloud.google.com/serverless-options>

NEW QUESTION 104

- (Exam Topic 5)

You are implementing the infrastructure for a web service on Google Cloud. The web service needs to receive and store the data from 500,000 requests per second. The data will be queried later in real time, based on exact matches of a known set of attributes. There will be periods where the web service will not receive any requests. The business wants to keep costs low. Which web service platform and database should you use for the application?

- A. Cloud Run and BigQuery
- B. Cloud Run and Cloud Bigtable
- C. A Compute Engine autoscaling managed instance group and BigQuery
- D. A Compute Engine autoscaling managed instance group and Cloud Bigtable

Answer: B

Explanation:

<https://cloud.google.com/run/docs/about-instance-autoscaling> <https://cloud.google.com/blog/topics/developers-practitioners/bigtable-vs-bigquery-whats-difference>

NEW QUESTION 106

- (Exam Topic 5)

Your architecture calls for the centralized collection of all admin activity and VM system logs within your project. How should you collect these logs from both VMs and services?

- A. All admin and VM system logs are automatically collected by Stackdriver.
- B. Stackdriver automatically collects admin activity logs for most service
- C. The Stackdriver Logging agent must be installed on each instance to collect system logs.
- D. Launch a custom syslogd compute instance and configure your GCP project and VMs to forward all logs to it.
- E. Install the Stackdriver Logging agent on a single compute instance and let it collect all audit and access logs for your environment.

Answer: B

Explanation:

<https://cloud.google.com/logging/docs/agent/default-logs>

NEW QUESTION 110

- (Exam Topic 5)

You need to upload files from your on-premises environment to Cloud Storage. You want the files to be encrypted on Cloud Storage using customer-supplied encryption keys. What should you do?

- A. Supply the encryption key in a .boto configuration file
- B. Use gsutil to upload the files.
- C. Supply the encryption key using gcloud confi
- D. Use gsutil to upload the files to that bucket.
- E. Use gsutil to upload the files, and use the flag --encryption-key to supply the encryption key.
- F. Use gsutil to create a bucket, and use the flag --encryption-key to supply the encryption key
- G. Use gsutil to upload the files to that bucket.

Answer: A

Explanation:

<https://cloud.google.com/storage/docs/encryption/customer-supplied-keys#gsutil>

NEW QUESTION 113

- (Exam Topic 5)

Your company has a Google Cloud project that uses BigQuery for data warehousing. They have a VPN tunnel between the on-premises environment and Google Cloud that is configured with Cloud VPN. The security team wants to avoid data exfiltration by malicious insiders, compromised code, and accidental oversharing. What should they do?

- A. Configure Private Google Access for on-premises only.
- B. Perform the following tasks: 1) Create a service account. 2) Give the BigQuery JobUser role and Storage Reader role to the service account. 3) Remove all other IAM access from the project.
- C. Configure VPC Service Controls and configure Private Google Access.
- D. Configure Private Google Access.

Answer: C

Explanation:

<https://cloud.google.com/vpc-service-controls/docs/overview>

VPC Service Controls improves your ability to mitigate the risk of data exfiltration from Google Cloud services such as Cloud Storage and BigQuery.

NEW QUESTION 115

- (Exam Topic 5)

You need to evaluate your team readiness for a new GCP project. You must perform the evaluation and create a skills gap plan incorporates the business goal of cost optimization. Your team has deployed two GCP projects successfully to date. What should you do?

- A. Allocate budget for team training
- B. Set a deadline for the new GCP project.
- C. Allocate budget for team training
- D. Create a roadmap for your team to achieve Google Cloud certification based on job role.
- E. Allocate budget to hire skilled external consultant
- F. Set a deadline for the new GCP project.
- G. Allocate budget to hire skilled external consultant
- H. Create a roadmap for your team to achieve Google Cloud certification based on job role.

Answer: B

Explanation:

https://services.google.com/fh/files/misc/cloud_center_of_excellence.pdf

NEW QUESTION 120

- (Exam Topic 5)

You are managing an application deployed on Cloud Run for Anthos, and you need to define a strategy for deploying new versions of the application. You want to evaluate the new code with a subset of production traffic to decide whether to proceed with the rollout. What should you do?

- A. Deploy a new revision to Cloud Run with the new version
- B. Configure traffic percentage between revisions.
- C. Deploy a new service to Cloud Run with the new version
- D. Add a Cloud Load Balancing instance in front of both services.
- E. In the Google Cloud Console page for Cloud Run, set up continuous deployment using Cloud Build for the development branch
- F. As part of the Cloud Build trigger, configure the substitution variable TRAFFIC_PERCENTAGE with the percentage of traffic you want directed to a new version.
- G. In the Google Cloud Console, configure Traffic Director with a new Service that points to the new version of the application on Cloud Run
- H. Configure Traffic Director to send a small percentage of traffic to the new version of the application.

Answer: A

Explanation:

<https://cloud.google.com/run/docs/rollouts-rollbacks-traffic-migration>

NEW QUESTION 122

- (Exam Topic 5)

A small number of API requests to your microservices-based application take a very long time. You know that each request to the API can traverse many services. You want to know which service takes the longest in those cases. What should you do?

- A. Set timeouts on your application so that you can fail requests faster.
- B. Send custom metrics for each of your requests to Stackdriver Monitoring.
- C. Use Stackdriver Monitoring to look for insights that show when your API latencies are high.
- D. Instrument your application with Stackdriver Trace in order to break down the request latencies at each microservice.

Answer: D

Explanation:

<https://cloud.google.com/trace/docs/overview>

NEW QUESTION 125

- (Exam Topic 5)

Your company is migrating its on-premises data center into the cloud. As part of the migration, you want to integrate Kubernetes Engine for workload orchestration. Parts of your architecture must also be PCI DSS-compliant. Which of the following is most accurate?

- A. App Engine is the only compute platform on GCP that is certified for PCI DSS hosting.
- B. Kubernetes Engine cannot be used under PCI DSS because it is considered shared hosting.
- C. Kubernetes Engine and GCP provide the tools you need to build a PCI DSS-compliant environment.
- D. All Google Cloud services are usable because Google Cloud Platform is certified PCI-compliant.

Answer: D

Explanation:

<https://cloud.google.com/security/compliance/pci-dss>

NEW QUESTION 128

- (Exam Topic 5)

Your company wants you to build a highly reliable web application with a few public APIs as the backend. You don't expect a lot of user traffic, but traffic could spike occasionally. You want to leverage Cloud Load Balancing, and the solution must be cost-effective for users. What should you do?

- A. Store static content such as HTML and images in Cloud CD
- B. Host the APIs on App Engine and store the user data in Cloud SQL.
- C. Store static content such as HTML and images in a Cloud Storage bucket
- D. Host the APIs on a zonal Google Kubernetes Engine cluster with worker nodes in multiple zones, and save the user data in Cloud Spanner.
- E. Store static content such as HTML and images in Cloud CD
- F. Use Cloud Run to host the APIs and save the user data in Cloud SQL.
- G. Store static content such as HTML and images in a Cloud Storage bucket
- H. Use Cloud Functions to host the APIs and save the user data in Firestore.

Answer: D

Explanation:

<https://cloud.google.com/load-balancing/docs/https/setting-up-https-serverless#gcloud:-cloud-functions> <https://cloud.google.com/blog/products/networking/better-load-balancing-for-app-engine-cloud-run-and-functio>

NEW QUESTION 130

- (Exam Topic 5)

Your company wants to start using Google Cloud resources but wants to retain their on-premises Active Directory domain controller for identity management. What should you do?

- A. Use the Admin Directory API to authenticate against the Active Directory domain controller.
- B. Use Google Cloud Directory Sync to synchronize Active Directory usernames with cloud identities and configure SAML SSO.
- C. Use Cloud Identity-Aware Proxy configured to use the on-premises Active Directory domain controller as an identity provider.
- D. Use Compute Engine to create an Active Directory (AD) domain controller that is a replica of the on-premises AD domain controller using Google Cloud Directory Sync.

Answer: B

Explanation:

https://cloud.google.com/solutions/federating-gcp-with-active-directory-introduction#implementing_federation

NEW QUESTION 131

- (Exam Topic 5)

Your company is running its application workloads on Compute Engine. The applications have been deployed in production, acceptance, and development environments. The production environment is business-critical and is used 24/7, while the acceptance and development environments are only critical during office hours. Your CFO has asked you to optimize these environments to achieve cost savings during idle times. What should you do?

- A. Create a shell script that uses the gcloud command to change the machine type of the development and acceptance instances to a smaller machine type outside of office hour
- B. Schedule the shell script on one of the production instances to automate the task.
- C. Use Cloud Scheduler to trigger a Cloud Function that will stop the development and acceptance environments after office hours and start them just before office hours.
- D. Deploy the development and acceptance applications on a managed instance group and enable autoscaling.
- E. Use regular Compute Engine instances for the production environment, and use preemptible VMs for the acceptance and development environments.

Answer: B

Explanation:

Reference: <https://cloud.google.com/blog/products/it-ops/best-practices-for-optimizing-your-cloud-costs>

NEW QUESTION 132

- (Exam Topic 5)

Your team will start developing a new application using microservices architecture on Kubernetes Engine. As part of the development lifecycle, any code change that has been pushed to the remote develop branch on your GitHub repository should be built and tested automatically. When the build and test are successful, the relevant microservice will be deployed automatically in the development environment. You want to ensure that all code deployed in the development environment follows this process. What should you do?

- A. Have each developer install a pre-commit hook on their workstation that tests the code and builds the container when committing on the development branch
- B. After a successful commit, have the developer deploy the newly built container image on the development cluster.
- C. Install a post-commit hook on the remote git repository that tests the code and builds the container when code is pushed to the development branch
- D. After a successful commit, have the developer deploy the newly built container image on the development cluster.
- E. Create a Cloud Build trigger based on the development branch that tests the code, builds the container, and stores it in Container Registry
- F. Create a deployment pipeline that watches for new images and deploys the new image on the development cluster
- G. Ensure only the deployment tool has access to deploy new versions.
- H. Create a Cloud Build trigger based on the development branch to build a new container image and store it in Container Registry
- I. Rely on Vulnerability Scanning to ensure the code tests succeed
- J. As the final step of the Cloud Build process, deploy the new container image on the development cluster
- K. Ensure only Cloud Build has access to deploy new versions.

Answer: C

Explanation:

<https://cloud.google.com/container-registry/docs/overview>

Create a Cloud Build trigger based on the development branch that tests the code, builds the container, and stores it in Container Registry. Create a deployment pipeline that watches for new images and deploys the new image on the development cluster. Ensure only the deployment tool has access to deploy new versions.

NEW QUESTION 137

- (Exam Topic 5)

You need to reduce the number of unplanned rollbacks of erroneous production deployments in your company's web hosting platform. Improvement to the QA/Test processes accomplished an 80% reduction. Which additional two approaches can you take to further reduce the rollbacks? Choose 2 answers

- A. Introduce a green-blue deployment model.
- B. Replace the QA environment with canary releases.
- C. Fragment the monolithic platform into microservices.
- D. Reduce the platform's dependency on relational database systems.
- E. Replace the platform's relational database systems with a NoSQL database.

Answer: AC

NEW QUESTION 140

- (Exam Topic 5)

Your company places a high value on being responsive and meeting customer needs quickly. Their primary business objectives are release speed and agility. You want to reduce the chance of security errors being accidentally introduced. Which two actions can you take? Choose 2 answers

- A. Ensure every code check-in is peer reviewed by a security SME.
- B. Use source code security analyzers as part of the CI/CD pipeline.
- C. Ensure you have stubs to unit test all interfaces between components.
- D. Enable code signing and a trusted binary repository integrated with your CI/CD pipeline.
- E. Run a vulnerability security scanner as part of your continuous-integration /continuous-delivery (CI/CD) pipeline.

Answer: BE

Explanation:

<https://docs.microsoft.com/en-us/vsts/articles/security-validation-cicd-pipeline?view=vsts>

NEW QUESTION 141

- (Exam Topic 5)

You want to allow your operations team to store logs from all the production projects in your Organization, without duplicating logs from other projects. All of the production projects are contained in a folder. You want to ensure that all logs for existing and new production projects are captured automatically. What should you do?

- A. Create an aggregated export on the Production folder.
- B. Set the log sink to be a Cloud Storage bucket in an operations project.
- C. Create an aggregated export on the Organization resource.
- D. Set the log sink to be a Cloud Storage bucket in an operations project.
- E. Create log exports in the production project.
- F. Set the log sinks to be a Cloud Storage bucket in an operations project.
- G. Create log exports in the production project.
- H. Set the log sinks to be BigQuery datasets in the production projects and grant IAM access to the operations team to run queries on the datasets.

Answer: B

NEW QUESTION 146

- (Exam Topic 5)

You are designing a large distributed application with 30 microservices. Each of your distributed microservices needs to connect to a database back-end. You want to store the credentials securely. Where should you store the credentials?

- A. In the source code
- B. In an environment variable
- C. In a secret management system
- D. In a config file that has restricted access through ACLs

Answer: C

Explanation:

https://cloud.google.com/docs/authentication/production#providing_credentials_to_your_application

NEW QUESTION 147

- (Exam Topic 5)

Your customer runs a web service used by e-commerce sites to offer product recommendations to users. The company has begun experimenting with a machine learning model on Google Cloud Platform to improve the quality of results.

What should the customer do to improve their model's results over time?

- A. Export Cloud Machine Learning Engine performance metrics from Stackdriver to BigQuery, to be used to analyze the efficiency of the model.
- B. Build a roadmap to move the machine learning model training from Cloud GPUs to Cloud TPUs, which offer better results.
- C. Monitor Compute Engine announcements for availability of newer CPU architectures, and deploy the model to them as soon as they are available for additional performance.
- D. Save a history of recommendations and results of the recommendations in BigQuery, to be used as training data.

Answer: D

Explanation:

<https://cloud.google.com/solutions/building-a-serverless-ml-model>

NEW QUESTION 149

- (Exam Topic 5)

Your company is planning to perform a lift and shift migration of their Linux RHEL 6.5+ virtual machines. The virtual machines are running in an on-premises VMware environment. You want to migrate them to Compute Engine following Google-recommended practices. What should you do?

- A. * 1. Define a migration plan based on the list of the applications and their dependencies.* 2. Migrate all virtual machines into Compute Engine individually with Migrate for Compute Engine.
- B. * 1. Perform an assessment of virtual machines running in the current VMware environment.* 2. Create images of all disk
- C. Import disks on Compute Engine.* 3. Create standard virtual machines where the boot disks are the ones you have imported.
- D. * 1. Perform an assessment of virtual machines running in the current VMware environment.* 2. Define a migration plan, prepare a Migrate for Compute Engine migration RunBook, and execute the migration.
- E. * 1. Perform an assessment of virtual machines running in the current VMware environment.* 2. Install a third-party agent on all selected virtual machine
- F. 3.Migrate all virtual machines into Compute Engine.

Answer: C

Explanation:

The framework illustrated in the preceding diagram has four phases:

- Assess. In this phase, you assess your source environment, assess the workloads that you want to migrate to Google Cloud, and assess which VMs support each workload.
- Plan. In this phase, you create the basic infrastructure for Migrate for Compute Engine, such as provisioning the resource hierarchy and setting up network access.
- Deploy. In this phase, you migrate the VMs from the source environment to Compute Engine.
- Optimize. In this phase, you begin to take advantage of the cloud technologies and capabilities.

Reference: <https://cloud.google.com/architecture/migrating-vms-migrate-for-compute-engine-getting-started>

NEW QUESTION 150

- (Exam Topic 5)

You write a Python script to connect to Google BigQuery from a Google Compute Engine virtual machine. The script is printing errors that it cannot connect to BigQuery. What should you do to fix the script?

- A. Install the latest BigQuery API client library for Python
- B. Run your script on a new virtual machine with the BigQuery access scope enabled
- C. Create a new service account with BigQuery access and execute your script with that user
- D. Install the bq component for gcloud with the command `gcloud components install bq`.

Answer: B

Explanation:

The error is most like caused by the access scope issue. When create new instance, you have the default Compute engine default service account but most serves access including BigQuery is not enable. Create an instance Most access are not enabled by default You have default service account but don't have the permission (scope) you can stop the instance, edit, change scope and restart it to enable the scope access. Of course, if you Run your script on a new virtual machine with the BigQuery access scope enabled, it also works

<https://cloud.google.com/compute/docs/access/service-accounts>

NEW QUESTION 151

- (Exam Topic 5)

Your company pushes batches of sensitive transaction data from its application server VMs to Cloud Pub/Sub for processing and storage. What is the Google-recommended way for your application to authenticate to the required Google Cloud services?

- A. Ensure that VM service accounts are granted the appropriate Cloud Pub/Sub IAM roles.
- B. Ensure that VM service accounts do not have access to Cloud Pub/Sub, and use VM access scopes to grant the appropriate Cloud Pub/Sub IAM roles.
- C. Generate an OAuth2 access token for accessing Cloud Pub/Sub, encrypt it, and store it in Cloud Storage for access from each VM.
- D. Create a gateway to Cloud Pub/Sub using a Cloud Function, and grant the Cloud Function service account the appropriate Cloud Pub/Sub IAM roles.

Answer: A

NEW QUESTION 154

- (Exam Topic 5)

You are tasked with building an online analytical processing (OLAP) marketing analytics and reporting tool. This requires a relational database that can operate on hundreds of terabytes of data. What is the Google recommended tool for such applications?

- A. Cloud Spanner, because it is globally distributed
- B. Cloud SQL, because it is a fully managed relational database
- C. Cloud Firestore, because it offers real-time synchronization across devices
- D. BigQuery, because it is designed for large-scale processing of tabular data

Answer: A

Explanation:

Reference: <https://cloud.google.com/files/BigQueryTechnicalWP.pdf>

NEW QUESTION 159

- (Exam Topic 5)

You have deployed an application on Anthos clusters (formerly Anthos GKE). According to the SRE practices at your company you need to be alerted if the request latency is above a certain threshold for a specified amount of time. What should you do?

- A. Enable the Cloud Trace API on your project and use Cloud Monitoring Alerts to send an alert based on the Cloud Trace metrics
- B. Configure Anthos Config Management on your cluster and create a yaml file that defines the SLO and alerting policy you want to deploy in your cluster
- C. Use Cloud Profiler to follow up the request latenc

- D. Create a custom metric in Cloud Monitoring based on the results of Cloud Profiler, and create an Alerting Policy in case this metric exceeds the threshold
- E. Install Anthos Service Mesh on your cluster
- F. Use the Google Cloud Console to define a Service Level Objective (SLO)

Answer: D

Explanation:

<https://cloud.google.com/service-mesh/docs/overview> <https://cloud.google.com/service-mesh/docs/observability/slo-overview>

NEW QUESTION 161

- (Exam Topic 5)

Your company's user-feedback portal comprises a standard LAMP stack replicated across two zones. It is deployed in the us-central1 region and uses autoscaled managed instance groups on all layers, except the database. Currently, only a small group of select customers have access to the portal. The portal meets a 99.99% availability SLA under these conditions. However, next quarter, your company will be making the portal available to all users, including unauthenticated users. You need to develop a resiliency testing strategy to ensure the system maintains the SLA once they introduce additional user load. What should you do?

- A. Capture existing users input, and replay captured user load until autoscale is triggered on all layers
- B. At the same time, terminate all resources in one of the zones.
- C. Create synthetic random user input, replay synthetic load until autoscale logic is triggered on at least one layer, and introduce "chaos" to the system by terminating random resources on both zones.
- D. Expose the new system to a larger group of users, and increase group size each day until autoscale logic is triggered on all layers
- E. At the same time, terminate random resources on both zones.
- F. Capture existing users input, and replay captured user load until resource utilization crosses 80%. Also, derive estimated number of users based on existing users usage of the app, and deploy enough resources to handle 200% of expected load.

Answer: A

NEW QUESTION 165

- (Exam Topic 5)

You are migrating third-party applications from optimized on-premises virtual machines to Google Cloud. You are unsure about the optimum CPU and memory options. The application has a consistent usage pattern across multiple weeks. You want to optimize resource usage for the lowest cost. What should you do?

- A. Create a Compute engine instance with CPU and Memory options similar to your application's current on-premises virtual machine
- B. Install the cloud monitoring agent, and deploy the third party application
- C. Run a load with normal traffic levels on third party application and follow the Rightsizing Recommendations in the Cloud Console
- D. Create an App Engine flexible environment, and deploy the third party application using a Docker file and a custom runtime
- E. Set CPU and memory options similar to your application's current on-premises virtual machine in the app.yaml file.
- F. Create an instance template with the smallest available machine type, and use an image of the third party application taken from the current on-premises virtual machine
- G. Create a managed instance group that uses average CPU to autoscale the number of instances in the group
- H. Modify the average CPU utilization threshold to optimize the number of instances running.
- I. Create multiple Compute Engine instances with varying CPU and memory options
- J. Install the cloud monitoring agent and deploy the third-party application on each of the instances
- K. Run a load test with high traffic levels on the application and use the results to determine the optimal settings.

Answer: A

Explanation:

Create a Compute engine instance with CPU and Memory options similar to your application's current on-premises virtual machine. Install the cloud monitoring agent, and deploy the third party application. Run a load with normal traffic levels on third party application and follow the Rightsizing Recommendations in the Cloud Console

<https://cloud.google.com/migrate/compute-engine/docs/4.9/concepts/planning-a-migration/cloud-instance-rightsizing>

NEW QUESTION 169

- (Exam Topic 5)

Your company is running a stateless application on a Compute Engine instance. The application is used heavily during regular business hours and lightly outside of business hours. Users are reporting that the application is slow during peak hours. You need to optimize the application's performance. What should you do?

- A. Create a snapshot of the existing disk
- B. Create an instance template from the snapshot
- C. Create an autoscaled managed instance group from the instance template.
- D. Create a snapshot of the existing disk
- E. Create a custom image from the snapshot
- F. Create an autoscaled managed instance group from the custom image.
- G. Create a custom image from the existing disk
- H. Create an instance template from the custom image. Create an autoscaled managed instance group from the instance template.
- I. Create an instance template from the existing disk
- J. Create a custom image from the instance template. Create an autoscaled managed instance group from the custom image.

Answer: B

Explanation:

<https://cloud.google.com/compute/docs/instance-templates/create-instance-templates>

NEW QUESTION 172

- (Exam Topic 5)

Your company has an application running on Compute Engine that allows users to play their favorite music. There are a fixed number of instances. Files are stored in Cloud Storage and data is streamed directly to users. Users are reporting that they sometimes need to attempt to play popular songs multiple times before they

are successful. You need to improve the performance of the application. What should you do?

- A. * 1. Copy popular songs into CloudSQL as a blob* 2. Update application code to retrieve data from CloudSQL when Cloud Storage is overloaded
- B. * 1. Create a managed instance group with Compute Engine instances* 2. Create a global load balancer and configure it with two backends* Managed instance group* Cloud Storage bucket* 3. Enable Cloud CDN on the bucket backend
- C. * 1. Mount the Cloud Storage bucket using gcsfuse on all backend Compute Engine instances* 2. Serve music files directly from the backend Compute Engine instance
- D. * 1. Create a Cloud Filestore NFS volume and attach it to the backend Compute Engine instances* 2. Download popular songs in Cloud Filestore* 3. Serve music files directly from the backend Compute Engine instance

Answer: B

NEW QUESTION 177

- (Exam Topic 5)

Your customer support tool logs all email and chat conversations to Cloud Bigtable for retention and analysis. What is the recommended approach for sanitizing this data of personally identifiable information or payment card information before initial storage?

- A. Hash all data using SHA256
- B. Encrypt all data using elliptic curve cryptography
- C. De-identify the data with the Cloud Data Loss Prevention API
- D. Use regular expressions to find and redact phone numbers, email addresses, and credit card numbers

Answer: A

Explanation:

Reference: <https://cloud.google.com/solutions/pci-dss-compliance-ingcp#>

NEW QUESTION 182

- (Exam Topic 5)

Your operations team currently stores 10 TB of data in an object storage service from a third-party provider. They want to move this data to a Cloud Storage bucket as quickly as possible, following Google-recommended practices. They want to minimize the cost of this data migration. Which approach should they use?

- A. Use the gsutil mv command to move the data
- B. Use the Storage Transfer Service to move the data
- C. Download the data to a Transfer Appliance and ship it to Google
- D. Download the data to the on-premises data center and upload it to the Cloud Storage bucket

Answer: B

Explanation:

<https://cloud.google.com/architecture/migration-to-google-cloud-transferring-your-large-datasets#transfer-optio> <https://cloud.google.com/storage-transfer-service>

NEW QUESTION 186

- (Exam Topic 5)

You need to set up Microsoft SQL Server on GCP. Management requires that there's no downtime in case of a data center outage in any of the zones within a GCP region. What should you do?

- A. Configure a Cloud SQL instance with high availability enabled.
- B. Configure a Cloud Spanner instance with a regional instance configuration.
- C. Set up SQL Server on Compute Engine, using Always On Availability Groups using Windows Failover Cluster in
- D. Place nodes in different subnets.
- E. Set up SQL Server Always On Availability Groups using Windows Failover Cluster in
- F. Place nodes in different zones.

Answer: D

Explanation:

<https://cloud.google.com/sql/docs/sqlserver/configure-ha>

NEW QUESTION 189

- (Exam Topic 5)

Your web application has several VM instances running within a VPC. You want to restrict communications between instances to only the paths and ports you authorize, but you don't want to rely on static IP addresses or subnets because the app can autoscale. How should you restrict communications?

- A. Use separate VPCs to restrict traffic
- B. Use firewall rules based on network tags attached to the compute instances
- C. Use Cloud DNS and only allow connections from authorized hostnames
- D. Use service accounts and configure the web application particular service accounts to have access

Answer: B

NEW QUESTION 191

- (Exam Topic 5)

All compute Engine instances in your VPC should be able to connect to an Active Directory server on specific ports. Any other traffic emerging from your instances is not allowed. You want to enforce this using VPC firewall rules.

How should you configure the firewall rules?

- A. Create an egress rule with priority 1000 to deny all traffic for all instance
- B. Create another egress rule with priority 100 to allow the Active Directory traffic for all instances.
- C. Create an egress rule with priority 100 to deny all traffic for all instance
- D. Create another egress rule with priority 1000 to allow the Active Directory traffic for all instances.
- E. Create an egress rule with priority 1000 to allow the Active Directory traffi
- F. Rely on the implied deny egress rule with priority 100 to block all traffic for all instances.
- G. Create an egress rule with priority 100 to allow the Active Directory traffi
- H. Rely on the implied deny egress rule with priority 1000 to block all traffic for all instances.

Answer: B

Explanation:

<https://cloud.google.com/vpc/docs/firewalls>

NEW QUESTION 192

- (Exam Topic 5)

Your company is planning to upload several important files to Cloud Storage. After the upload is completed, they want to verify that the upload content is identical to what they have on- premises. You want to minimize the cost and effort of performing this check. What should you do?

- A. 1) Use gsutil -m to upload all the files to Cloud Storage.2) Use gsutil cp to download the uploaded files3) Use Linux diff to compare the content of the files
- B. 1) Use gsutil -m to upload all the files to Cloud Storage.2) Develop a custom Java application that computes CRC32C hashes3) Use gsutil ls -L gs://[YOUR_BUCKET_NAME] to collect CRC32C hashes of the uploaded files 4)Compare the hashes
- C. 1) Use Linux shasum to compute a digest of files you want to upload2) Use gsutil -m to upload all the files to the Cloud Storage3) Use gsutil cp to download the uploaded files4) Use Linux shasum to compute a digest of the downloaded files 5.Compare the hashes
- D. 1)Use gsutil -m to upload all the files to Cloud Storage.2) Use gsutil hash -c FILE_NAME to generate CRC32C hashes of all on-premises files3) Use gsutil ls -L gs://[YOUR_BUCKET_NAME] to collect CRC32C hashes of the uploaded files 4)Compare the hashes

Answer: D

Explanation:

<https://cloud.google.com/storage/docs/gsutil/commands/hash>

NEW QUESTION 196

- (Exam Topic 5)

Your marketing department wants to send out a promotional email campaign. The development team wants to minimize direct operation management. They project a wide range of possible customer responses, from 100 to 500,000 click-throughs per day. The link leads to a simple website that explains the promotion and collects user information and preferences. Which infrastructure should you recommend? (CHOOSE TWO)

- A. Use Google App Engine to serve the website and Google Cloud Datastore to store user data.
- B. Use a Google Container Engine cluster to serve the website and store data to persistent disk.
- C. Use a managed instance group to serve the website and Google Cloud Bigtable to store user data.
- D. Use a single compute Engine virtual machine (VM) to host a web server, backed by Google Cloud SQL.

Answer: AC

Explanation:

Reference: <https://cloud.google.com/storage-options/> References: <https://cloud.google.com/storage-options/>

NEW QUESTION 199

- (Exam Topic 5)

A production database virtual machine on Google Compute Engine has an ext4-formatted persistent disk for data files The database is about to run out of storage space How can you remediate the problem with the least amount of downtime?

- A. In the Cloud Platform Console, increase the size of the persistent disk and use the resize2fs command in Linux.
- B. Shut down the virtual machine, use the Cloud Platform Console to increase the persistent disk size, then restart the virtual machine.
- C. In the Cloud Platform Console, increase the size of the persistent disk and verify the new space is ready to use with the fdisk command in Linux.
- D. In the Cloud Platform Console, create a new persistent disk attached to the virtual machine, format and mount it, and configure the database service to move the files to the new disk.
- E. In the Cloud Platform Console, create a snapshot of the persistent disk, restore the snapshot to a new larger disk, unmount the old disk, mount the new disk, and restart the database service.

Answer: A

Explanation:

On Linux instances, connect to your instance and manually resize your partitions and file systems to use the additional disk space that you added.

Extend the file system on the disk or the partition to use the added space. If you grew a partition on your disk, specify the partition. If your disk does not have a partition table, specify only the disk ID.

```
sudo resize2fs /dev/[DISK_ID][PARTITION_NUMBER]
```

where [DISK_ID] is the device name and [PARTITION_NUMBER] is the partition number for the device where you are resizing the file system.

References: <https://cloud.google.com/compute/docs/disks/add-persistent-disk>

NEW QUESTION 202

- (Exam Topic 5)

You want to automate the creation of a managed instance group and a startup script to install the OS package dependencies. You want to minimize the startup time for VMs in the instance group.

What should you do?

- A. Use Terraform to create the managed instance group and a startup script to install the OS package dependencies.
- B. Create a custom VM image with all OS package dependencie

- C. Use Deployment Manager to create the managed instance group with the VM image.
- D. Use Puppet to create the managed instance group and install the OS package dependencies.
- E. Use Deployment Manager to create the managed instance group and Ansible to install the OS package dependencies.

Answer: B

Explanation:

"Custom images are more deterministic and start more quickly than instances with startup scripts. However, startup scripts are more flexible and let you update the apps and settings in your instances more easily." https://cloud.google.com/compute/docs/instance-templates/create-instance-templates#using_custom_or_public_i

NEW QUESTION 207

- (Exam Topic 5)

You have an application that will run on Compute Engine. You need to design an architecture that takes into account a disaster recovery plan that requires your application to fail over to another region in case of a regional outage. What should you do?

- A. Deploy the application on two Compute Engine instances in the same project but in a different region. Use the first instance to serve traffic, and use the HTTP load balancing service to fail over to the standby instance in case of a disaster.
- B. Deploy the application on a Compute Engine instance.
- C. Use the instance to serve traffic, and use the HTTP load balancing service to fail over to an instance on your premises in case of a disaster.
- D. Deploy the application on two Compute Engine instance groups, each in the same project but in a different region.
- E. Use the first instance group to serve traffic, and use the HTTP load balancing service to fail over to the standby instance group in case of a disaster.
- F. Deploy the application on two Compute Engine instance groups, each in separate project and a different region.
- G. Use the first instance group to serve traffic, and use the HTTP load balancing service to fail over to the standby instance in case of a disaster.

Answer: C

NEW QUESTION 211

- (Exam Topic 5)

Your company has announced that they will be outsourcing operations functions. You want to allow developers to easily stage new versions of a cloud-based application in the production environment and allow the outsourced operations team to autonomously promote staged versions to production. You want to minimize the operational overhead of the solution. Which Google Cloud product should you migrate to?

- A. App Engine
- B. GKE On-Prem
- C. Compute Engine
- D. Google Kubernetes Engine

Answer: D

Explanation:

Reference: <https://cloud.google.com/security/compliance/eba-outsourcing-mapping-gcp>

NEW QUESTION 214

- (Exam Topic 5)

You are working at a sports association whose members range in age from 8 to 30. The association collects a large amount of health data, such as sustained injuries. You are storing this data in BigQuery. Current legislation requires you to delete such information upon request of the subject. You want to design a solution that can accommodate such a request. What should you do?

- A. Use a unique identifier for each individual.
- B. Upon a deletion request, delete all rows from BigQuery with this identifier.
- C. When ingesting new data in BigQuery, run the data through the Data Loss Prevention (DLP) API to identify any personal information.
- D. As part of the DLP scan, save the result to Data Catalog.
- E. Upon a deletion request, query Data Catalog to find the column with personal information.
- F. Create a BigQuery view over the table that contains all data.
- G. Upon a deletion request, exclude the rows that affect the subject's data from this view.
- H. Use this view instead of the source table for all analysis tasks.
- I. Use a unique identifier for each individual.
- J. Upon a deletion request, overwrite the column with the unique identifier with a salted SHA256 of its value.

Answer: B

Explanation:

Current legislation requires you to delete "SUCH" information upon request of the subject. " So from that point of view the question is not to delete the entire user records but specific data related to personal health data. With DLP you can use InfoTypes and InfoType detectors to specifically scan for those entries and how to act upon them (link <https://cloud.google.com/dlp/docs/concepts-infotypes>)
<https://cloud.google.com/dlp#section-6>

NEW QUESTION 218

- (Exam Topic 5)

You have a Python web application with many dependencies that requires 0.1 CPU cores and 128 MB of memory to operate in production. You want to monitor and maximize machine utilization. You also to reliably deploy new versions of the application. Which set of steps should you take?

- A. Perform the following: 1) Create a managed instance group with f1-micro type machines. 2) Use a startup script to clone the repository, check out the production branch, install the dependencies, and start the Python app. 3) Restart the instances to automatically deploy new production releases.
- B. Perform the following: 1) Create a managed instance group with n1-standard-1 type machines. 2) Build a Compute Engine image from the production branch that contains all of the dependencies and automatically starts the Python app. 3) Rebuild the Compute Engine image, and update the instance template to deploy new production releases.
- C. Perform the following: 1) Create a Kubernetes Engine cluster with n1-standard-1 type machines. 2) Build a Docker image from the production branch with all of the dependencies, and tag it with the version number. 3) Create a Kubernetes Deployment with the imagePullPolicy set to "IfNotPresent" in the staging

namespace, and then promote it to the production namespace after testing.

D. Perform the following:1) Create a Kubernetes Engine (GKE) cluster with n1-standard-4 type machines.2) Build a Docker image from the master branch with all of the dependencies, and tag it with "latest".3) Create a Kubernetes Deployment in the default namespace with the imagePullPolicy set to "Always". Restart the pods to automatically deploy new production releases.

Answer: D

Explanation:

<https://cloud.google.com/compute/docs/instance-templates>

NEW QUESTION 219

- (Exam Topic 5)

Your operations team has asked you to help diagnose a performance issue in a production application that runs on Compute Engine. The application is dropping requests that reach it when under heavy load. The process list for affected instances shows a single application process that is consuming all available CPU, and autoscaling has reached the upper limit of instances. There is no abnormal load on any other related systems, including the database. You want to allow production traffic to be served again as quickly as possible. Which action should you recommend?

- A. Change the autoscaling metric to `agent.googleapis.com/memory/percent_used`.
- B. Restart the affected instances on a staggered schedule.
- C. SSH to each instance and restart the application process.
- D. Increase the maximum number of instances in the autoscaling group.

Answer: D

Explanation:

Reference: <https://cloud.google.com/blog/products/sap-google-cloud/best-practices-for-sap-app-server-autoscaling-on-google-cloud>

NEW QUESTION 221

- (Exam Topic 5)

Your company has a support ticketing solution that uses App Engine Standard. The project that contains the App Engine application already has a Virtual Private Cloud(VPC) network fully connected to the company's on-premises environment through a Cloud VPN tunnel. You want to enable App Engine application to communicate with a database that is running in the company's on-premises environment. What should you do?

- A. Configure private services access
- B. Configure private Google access for on-premises hosts only
- C. Configure serverless VPC access
- D. Configure private Google access

Answer: C

Explanation:

<https://cloud.google.com/appengine/docs/standard/python3/connecting-vpc> https://cloud.google.com/appengine/docs/flexible/python/using-third-party-databases#on_premises

NEW QUESTION 226

- (Exam Topic 5)

You are developing an application using different microservices that should remain internal to the cluster. You want to be able to configure each microservice with a specific number of replicas. You also want to be able to address a specific microservice from any other microservice in a uniform way, regardless of the number of replicas the microservice scales to. You need to implement this solution on Google Kubernetes Engine. What should you do?

- A. Deploy each microservice as a Deployment
- B. Expose the Deployment in the cluster using a Service, and use the Service DNS name to address it from other microservices within the cluster.
- C. Deploy each microservice as a Deployment
- D. Expose the Deployment in the cluster using an Ingress, and use the Ingress IP address to address the Deployment from other microservices within the cluster.
- E. Deploy each microservice as a Pod
- F. Expose the Pod in the cluster using a Service, and use the Service DNS name to address the microservice from other microservices within the cluster.
- G. Deploy each microservice as a Pod
- H. Expose the Pod in the cluster using an Ingress, and use the Ingress IP address name to address the Pod from other microservices within the cluster.

Answer: A

Explanation:

<https://kubernetes.io/docs/concepts/services-networking/ingress/>

NEW QUESTION 227

- (Exam Topic 5)

Your company has an application running on a deployment in a GKE cluster. You have a separate cluster for development, staging and production. You have discovered that the team is able to deploy a Docker image to the production cluster without first testing the deployment in development and then staging. You want to allow the team to have autonomy but want to prevent this from happening. You want a Google Cloud solution that can be implemented quickly with minimal effort. What should you do?

- A. Create a Kubernetes admission controller to prevent the container from starting if it is not approved for usage in the given environment
- B. Configure a Kubernetes lifecycle hook to prevent the container from starting if it is not approved for usage in the given environment
- C. Implement a corporate policy to prevent teams from deploying Docker image to an environment unless the Docker image was tested in an earlier environment
- D. Configure the binary authorization policies for the development, staging and production cluster
- E. Create attestations as part of the continuous integration pipeline"

Answer: D

Explanation:

<https://cloud.google.com/architecture/prep-kubernetes-engine-for-prod#binary-authorization>

The most common Binary Authorization use cases involve attestations. An attestation certifies that a specific image has completed a previous stage, as described previously. You configure the Binary Authorization policy to verify the attestation before allowing the image to be deployed. At deploy time, instead of redoing activities that were completed in earlier stages, Binary Authorization only needs to verify the attestation. <https://cloud.google.com/binary-authorization/docs/overview>

NEW QUESTION 231

- (Exam Topic 5)

You want your Google Kubernetes Engine cluster to automatically add or remove nodes based on CPUload. What should you do?

- A. Configure a HorizontalPodAutoscaler with a target CPU usag
- B. Enable the Cluster Autoscaler from the GCP Console.
- C. Configure a HorizontalPodAutoscaler with a target CPU usag
- D. Enable autoscaling on the managed instance group for the cluster using the gcloud command.
- E. Create a deployment and set the maxUnavailable and maxSurge propertie
- F. Enable the Cluster Autoscaler using the gcloud command.
- G. Create a deployment and set the maxUnavailable and maxSurge propertie
- H. Enable autoscaling on the cluster managed instance group from the GCP Console.

Answer: B

NEW QUESTION 232

- (Exam Topic 5)

Your customer is receiving reports that their recently updated Google App Engine application is taking approximately 30 seconds to load for some of their users. This behavior was not reported before the update. What strategy should you take?

- A. Work with your ISP to diagnose the problem.
- B. Open a support ticket to ask for network capture and flow data to diagnose the problem, then roll back your application.
- C. Roll back to an earlier known good release initially, then use Stackdriver Trace and logging to diagnose the problem in a development/test/staging environment.
- D. Roll back to an earlier known good release, then push the release again at a quieter period to investigate. Then use Stackdriver Trace and logging to diagnose the problem.

Answer: C

Explanation:

Stackdriver Logging allows you to store, search, analyze, monitor, and alert on log data and events from Google Cloud Platform and Amazon Web Services (AWS). Our API also allows ingestion of any custom log data from any source. Stackdriver Logging is a fully managed service that performs at scale and can ingest application and system log data from thousands of VMs. Even better, you can analyze all that log data in real time.

References: <https://cloud.google.com/logging/>

NEW QUESTION 237

- (Exam Topic 5)

You need to develop procedures to verify resilience of disaster recovery for remote recovery using GCP. Your production environment is hosted on-premises. You need to establish a secure, redundant connection between your on premises network and the GCP network. What should you do?

- A. Verify that Dedicated Interconnect can replicate files to GC
- B. Verify that direct peering can establish a secure connection between your networks if Dedicated Interconnect fails.
- C. Verify that Dedicated Interconnect can replicate files to GC
- D. Verify that Cloud VPN can establish a secure connection between your networks if Dedicated Interconnect fails.
- E. Verify that the Transfer Appliance can replicate files to GC
- F. Verify that direct peering can establish a secure connection between your networks if the Transfer Appliance fails.
- G. Verify that the Transfer Appliance can replicate files to GC
- H. Verify that Cloud VPN can establish a secure connection between your networks if the Transfer Appliance fails.

Answer: B

Explanation:

<https://cloud.google.com/interconnect/docs/how-to/direct-peering>

NEW QUESTION 240

- (Exam Topic 5)

Your company captures all web traffic data in Google Analytics 260 and stores it in BigQuery. Each country has its own dataset. Each dataset has multiple tables. You want analysts from each country to be able to see and query only the data for their respective countries. How should you configure the access rights?

- A. Create a group per countr
- B. Add analysts to their respective country-group
- C. Create a single group 'all_analysts', and add all country-groups as member
- D. Grant the 'all-analysis' group the IAM role of BigQuery jobUse
- E. Share the appropriate dataset with view access with each respective analyst country-group.
- F. Create a group per countr
- G. Add analysts to their respective country-group
- H. Create a single group 'all_analysts', and add all country-groups as member
- I. Grant the 'all-analysis' group the IAM role of BigQuery jobUse
- J. Share the appropriate tables with view access with each respective analystcountrygroup.
- K. Create a group per countr
- L. Add analysts to their respective country-group

- M. Create a single group 'all_analysts', and add all country-groups as member
- N. Grant the 'all-analysis' group the IAM role of BigQuery dataView
- O. Share the appropriate dataset with view access with each respective analyst country-group.
- P. Create a group per countr
- Q. Add analysts to their respective country-group
- R. Create a single group 'all_analysts', and add all country-groups as member
- S. Grant the 'all-analysis' group the IAM role of BigQuery dataView
- T. Share the appropriate table with view access with each respective analyst countrygroup.

Answer: A

NEW QUESTION 243

- (Exam Topic 5)

You want to store critical business information in Cloud Storage buckets. The information is regularly changed but previous versions need to be referenced on a regular basis. You want to ensure that there is a record of all changes to any information in these buckets. You want to ensure that accidental edits or deletions can be easily roiled back. Which feature should you enable?

- A. Bucket Lock
- B. Object Versioning
- C. Object change notification
- D. Object Lifecycle Management

Answer: B

NEW QUESTION 244

- (Exam Topic 5)

You are deploying an application on App Engine that needs to integrate with an on-premises database. For security purposes, your on-premises database must not be accessible through the public Internet. What should you do?

- A. Deploy your application on App Engine standard environment and use App Engine firewall rules to limit access to the open on-premises database.
- B. Deploy your application on App Engine standard environment and use Cloud VPN to limit access to the onpremises database.
- C. Deploy your application on App Engine flexible environment and use App Engine firewall rules to limit access to the on-premises database.
- D. Deploy your application on App Engine flexible environment and use Cloud VPN to limit access to the on-premises database.

Answer: D

Explanation:

<https://cloud.google.com/appengine/docs/flexible/python/using-third-party-databases>

NEW QUESTION 248

- (Exam Topic 5)

You are moving an application that uses MySQL from on-premises to Google Cloud. The application will run on Compute Engine and will use Cloud SQL. You want to cut over to the Compute Engine deployment of the application with minimal downtime and no data loss to your customers. You want to migrate the application with minimal modification. You also need to determine the cutover strategy. What should you do?

- A. * 1. Set up Cloud VPN to provide private network connectivity between the Compute Engine application and the on-premises MySQL server.* 2. Stop the on-premises application.* 3. Create a mysqldump of the on-premises MySQL serve
- B. * 4.Upload the dump to a Cloud Storage bucket.* 5. Import the dump into Cloud SQL.* 6. Modify the source code of the application to write queries to both databases and read from its local database.* 7. Start the Compute Engine applicatio
- C. 8.Stop the on-premises application.
- D. * 1. Set up Cloud SQL proxy and MySQL proxy.* 2. Create a mysqldump of the on-premises MySQL serve
- E. * 3. Upload the dump to a Cloud Storage bucket.* 4. Import the dump into Cloud SQ
- F. * 5. Stop the on-premises applicatio
- G. * 6. Start the Compute Engine application.
- H. * 1. Set up Cloud VPN to provide private network connectivity between the Compute Engine applicationand the on-premises MySQL serve
- I. * 2. Stop the on-premises application.* 3. Start the Compute Engine application, configured to read and write to the on-premises MySQL serve
- J. * 4. Create the replication configuration in Cloud SQL.* 5. Configure the source database server to accept connections from the Cloud SQL replic
- K. * 6. Finalize the Cloud SQL replica configuration.* 7. When replication has been completed, stop the Compute Engine applicatio
- L. * 8. Promote the Cloud SQL replica to a standalone instance.* 9. Restart the Compute Engine application, configured to read and write to the Cloud SQL standalone instance.
- M. * 1. Stop the on-premises application.* 2. Create a mysqldump of the on-premises MySQL serve
- N. * 3. Upload the dump to a Cloud Storage bucket.* 4. Import the dump into Cloud SQL.* 5. Start the application on Compute Engine.

Answer: C

Explanation:

External replica promotion migration In the migration strategy of external replica promotion, you create an external database replica and synchronize the existing data to that replica. This can happen with minimal downtime to the existing database. When you have a replica database, the two databases have different roles that are referred to in this document as primary and replica. After the data is synchronized, you promote the replica to be the primary in order to move the management layer with minimal impact to database uptime. In Cloud SQL, an easy way to accomplish the external replica promotion is to use the automated migration workflow. This process automates many of the steps that are needed for this type of migration.

<https://cloud.google.com/architecture/migrating-mysql-to-cloudsql-concept>

- The best option for migrating your MySQL database is to use an external replica promotion. In this strategy, you create a replica database and set your existing database as the primary. You wait until the two databases are in sync, and you then promote your MySQL replica database to be the primary. This process minimizes database downtime related to the database migration. https://cloud.google.com/architecture/migrating-mysql-to-cloudsql-concept#external_replica_promotion_migrat

NEW QUESTION 253

- (Exam Topic 5)

You are configuring the cloud network architecture for a newly created project in Google Cloud that will host applications in Compute Engine. Compute Engine virtual machine instances will be created in two different subnets (sub-a and sub-b) within a single region.

- Instances in sub-a will have public IP addresses
- Instances in sub-b will have only private IP addresses

To download updated packages, instances must connect to a public repository outside the boundaries of Google Cloud. You need to allow sub-b to access the external repository. What should you do?

- A. Enable Private Google Access on sub-b
- B. Configure Cloud NAT and select sub-b in the NAT mapping section
- C. Configure a bastion host instance in sub-a to connect to instances in sub-b
- D. Enable Identity Aware Proxy for TCP forwarding for instances in sub-b

Answer: B

NEW QUESTION 255

- (Exam Topic 5)

Your organization has a 3-tier web application deployed in the same network on Google Cloud Platform. Each tier (web, API, and database) scales independently of the others. Network traffic should flow through the web to the API tier and then on to the database tier. Traffic should not flow between the web and the database tier. How should you configure the network?

- A. Add each tier to a different subnetwork.
- B. Set up software based firewalls on individual VMs.
- C. Add tags to each tier and set up routes to allow the desired traffic flow.
- D. Add tags to each tier and set up firewall rules to allow the desired traffic flow.

Answer: D

Explanation:

<https://aws.amazon.com/blogs/aws/building-three-tier-architectures-with-security-groups/>

Google Cloud Platform (GCP) enforces firewall rules through rules and tags. GCP rules and tags can be defined once and used across all regions.

References: <https://cloud.google.com/docs/compare/openstack/> <https://aws.amazon.com/it/blogs/aws/building-three-tier-architectures-with-security-groups/>

NEW QUESTION 259

- (Exam Topic 5)

You are creating an App Engine application that uses Cloud Datastore as its persistence layer. You need to retrieve several root entities for which you have the identifiers. You want to minimize the overhead in operations performed by Cloud Datastore. What should you do?

- A. Create the Key object for each Entity and run a batch get operation
- B. Create the Key object for each Entity and run multiple get operations, one operation for each entity
- C. Use the identifiers to create a query filter and run a batch query operation
- D. Use the identifiers to create a query filter and run multiple query operations, one operation for each entity

Answer: C

Explanation:

<https://cloud.google.com/datastore/docs/concepts/entities#datastore-datastore-batch-upsert-nodejs>

NEW QUESTION 264

- (Exam Topic 5)

One of your primary business objectives is being able to trust the data stored in your application. You want to log all changes to the application data. How can you design your logging system to verify authenticity of your logs?

- A. Write the log concurrently in the cloud and on premises.
- B. Use a SQL database and limit who can modify the log table.
- C. Digitally sign each timestamp and log entry and store the signature.
- D. Create a JSON dump of each log entry and store it in Google Cloud Storage.

Answer: C

Explanation:

<https://cloud.google.com/storage/docs/access-logs>

References: <https://cloud.google.com/logging/docs/reference/tools/gcloud-logging>

NEW QUESTION 266

- (Exam Topic 5)

Your company recently acquired a company that has infrastructure in Google Cloud. Each company has its own Google Cloud organization. Each company is using a Shared Virtual Private Cloud (VPC) to provide network connectivity for its applications. Some of the subnets used by both companies overlap. In order for both businesses to integrate, the applications need to have private network connectivity. These applications are not on overlapping subnets. You want to provide connectivity with minimal re-engineering. What should you do?

- A. Set up VPC peering and peer each Shared VPC together
- B. Configure SSH port forwarding on each application to provide connectivity between applications in the different Shared VPCs
- C. Migrate the projects from the acquired company into your company's Google Cloud organization. Re-launch the instances in your company's Shared VPC
- D. Set up a Cloud VPN gateway in each Shared VPC and peer Cloud VPNs

Answer: B

NEW QUESTION 271

- (Exam Topic 5)

Your company provides a recommendation engine for retail customers. You are providing retail customers with an API where they can submit a user ID and the API returns a list of recommendations for that user. You are responsible for the API lifecycle and want to ensure stability for your customers in case the API makes backward-incompatible changes. You want to follow Google-recommended practices. What should you do?

- A. Create a distribution list of all customers to inform them of an upcoming backward-incompatible change at least one month before replacing the old API with the new API.
- B. Create an automated process to generate API documentation, and update the public API documentation as part of the CI/CD process when deploying an update to the API.
- C. Use a versioning strategy for the APIs that increases the version number on every backward-incompatible change.
- D. Use a versioning strategy for the APIs that adds the suffix "DEPRECATED" to the current API version number on every backward-incompatible change.
- E. Use the current version number for the new API.

Answer: C

Explanation:

<https://cloud.google.com/apis/design/versioning>

All Google API interfaces must provide a major version number, which is encoded at the end of the protobuf package, and included as the first part of the URI path for REST APIs. If an API introduces a breaking change, such as removing or renaming a field, it must increment its API version number to ensure that existing user code does not suddenly break.

NEW QUESTION 274

- (Exam Topic 5)

You need to deploy an application on Google Cloud that must run on a Debian Linux environment. The application requires extensive configuration in order to operate correctly. You want to ensure that you can install Debian distribution updates with minimal manual intervention whenever they become available. What should you do?

- A. Create a Compute Engine instance template using the most recent Debian image
- B. Create an instance from this template, and install and configure the application as part of the startup script
- C. Repeat this process whenever a new Google-managed Debian image becomes available.
- D. Create a Debian-based Compute Engine instance, install and configure the application, and use OS patch management to install available updates.
- E. Create an instance with the latest available Debian image
- F. Connect to the instance via SSH, and install and configure the application on the instance
- G. Repeat this process whenever a new Google-managed Debian image becomes available.
- H. Create a Docker container with Debian as the base image
- I. Install and configure the application as part of the Docker image creation process
- J. Host the container on Google Kubernetes Engine and restart the container whenever a new update is available.

Answer: B

Explanation:

Reference: <https://cloud.google.com/compute/docs/os-patch-management>

NEW QUESTION 277

- (Exam Topic 5)

You are developing your microservices application on Google Kubernetes Engine. During testing, you want to validate the behavior of your application in case a specific microservice should suddenly crash. What should you do?

- A. Add a taint to one of the nodes of the Kubernetes cluster
- B. For the specific microservice, configure a pod anti-affinity label that has the name of the tainted node as a value.
- C. Use Istio's fault injection on the particular microservice whose faulty behavior you want to simulate.
- D. Destroy one of the nodes of the Kubernetes cluster to observe the behavior.
- E. Configure Istio's traffic management features to steer the traffic away from a crashing microservice.

Answer: B

Explanation:

Microservice runs on all nodes. The microservice runs on Pod, Pod runs on Nodes. Nodes is nothing but Virtual machines. Once deployed the application microservices will get deployed across all Nodes. Destroying one node may not mimic the behaviour of microservice crashing as it may be running in other nodes.
link: <https://istio.io/latest/docs/tasks/traffic-management/fault-injection/>

NEW QUESTION 281

- (Exam Topic 5)

You are migrating your on-premises solution to Google Cloud in several phases. You will use Cloud VPN to maintain a connection between your on-premises systems and Google Cloud until the migration is completed.
You want to make sure all your on-premises systems remain reachable during this period. How should you organize your networking in Google Cloud?

- A. Use the same IP range on Google Cloud as you use on-premises
- B. Use the same IP range on Google Cloud as you use on-premises for your primary IP range and use a secondary range that does not overlap with the range you use on-premises
- C. Use an IP range on Google Cloud that does not overlap with the range you use on-premises
- D. Use an IP range on Google Cloud that does not overlap with the range you use on-premises for your primary IP range and use a secondary range with the same IP range as you use on-premises

Answer: C

NEW QUESTION 282

- (Exam Topic 6)

For this question, refer to the Dress4Win case study. You are responsible for the security of data stored in Cloud Storage for your company, Dress4Win. You have

already created a set of Google Groups and assigned the appropriate users to those groups. You should use Google best practices and implement the simplest design to meet the requirements.

Considering Dress4Win's business and technical requirements, what should you do?

- A. Assign custom IAM roles to the Google Groups you created in order to enforce security requirements. Encrypt data with a customer-supplied encryption key when storing files in Cloud Storage.
- B. Assign custom IAM roles to the Google Groups you created in order to enforce security requirements. Enable default storage encryption before storing files in Cloud Storage.
- C. Assign predefined IAM roles to the Google Groups you created in order to enforce security requirements. Utilize Google's default encryption at rest when storing files in Cloud Storage.
- D. Assign predefined IAM roles to the Google Groups you created in order to enforce security requirement
- E. Ensure that the default Cloud KMS key is set before storing files in Cloud Storage.

Answer: D

Explanation:

<https://cloud.google.com/iam/docs/understanding-service-accounts>

NEW QUESTION 285

- (Exam Topic 6)

For this question, refer to the Dress4Win case study. You want to ensure that your on-premises architecture meets business requirements before you migrate your solution.

What change in the on-premises architecture should you make?

- A. Replace RabbitMQ with Google Pub/Sub.
- B. Downgrade MySQL to v5.7, which is supported by Cloud SQL for MySQL.
- C. Resize compute resources to match predefined Compute Engine machine types.
- D. Containerize the micro services and host them in Google Kubernetes Engine.

Answer: C

NEW QUESTION 287

- (Exam Topic 6)

For this question, refer to the Dress4Win case study. Dress4Win is expected to grow to 10 times its size in 1 year with a corresponding growth in data and traffic that mirrors the existing patterns of usage. The CIO has set the target of migrating production infrastructure to the cloud within the next 6 months. How will you configure the solution to scale for this growth without making major application changes and still maximize the ROI?

- A. Migrate the web application layer to App Engine, and MySQL to Cloud Datastore, and NAS to Cloud Storage
- B. Deploy RabbitMQ, and deploy Hadoop servers using Deployment Manager.
- C. Migrate RabbitMQ to Cloud Pub/Sub, Hadoop to BigQuery, and NAS to Compute Engine with Persistent Disk storage
- D. Deploy Tomcat, and deploy Nginx using Deployment Manager.
- E. Implement managed instance groups for Tomcat and Ngin
- F. Migrate MySQL to Cloud SQL, RabbitMQ to Cloud Pub/Sub, Hadoop to Cloud Dataproc, and NAS to Compute Engine with Persistent Disk storage.
- G. Implement managed instance groups for the Tomcat and Ngin
- H. Migrate MySQL to Cloud SQL, RabbitMQ to Cloud Pub/Sub, Hadoop to Cloud Dataproc, and NAS to Cloud Storage.

Answer: D

NEW QUESTION 292

- (Exam Topic 6)

For this question, refer to the Dress4Win case study. Considering the given business requirements, how would you automate the deployment of web and transactional data layers?

- A. Deploy Nginx and Tomcat using Cloud Deployment Manager to Compute Engine
- B. Deploy a Cloud SQL server to replace MySQL
- C. Deploy Jenkins using Cloud Deployment Manager.
- D. Deploy Nginx and Tomcat using Cloud Launcher
- E. Deploy a MySQL server using Cloud Launcher. Deploy Jenkins to Compute Engine using Cloud Deployment Manager scripts.
- F. Migrate Nginx and Tomcat to App Engine
- G. Deploy a Cloud Datastore server to replace the MySQL server in a high-availability configuration
- H. Deploy Jenkins to Compute Engine using Cloud Launcher.
- I. Migrate Nginx and Tomcat to App Engine
- J. Deploy a MySQL server using Cloud Launcher
- K. Deploy Jenkins to Compute Engine using Cloud Launcher.

Answer: A

NEW QUESTION 295

- (Exam Topic 6)

For this question, refer to the Dress4Win case study. Which of the compute services should be migrated as –is and would still be an optimized architecture for performance in the cloud?

- A. Web applications deployed using App Engine standard environment
- B. RabbitMQ deployed using an unmanaged instance group
- C. Hadoop/Spark deployed using Cloud Dataproc Regional in High Availability mode
- D. Jenkins, monitoring, bastion hosts, security scanners services deployed on custom machine types

Answer: C

NEW QUESTION 297

- (Exam Topic 7)

For this question, refer to the TerramEarth case study. You are asked to design a new architecture for the ingestion of the data of the 200,000 vehicles that are connected to a cellular network. You want to follow Google-recommended practices.

Considering the technical requirements, which components should you use for the ingestion of the data?

- A. Google Kubernetes Engine with an SSL Ingress
- B. Cloud IoT Core with public/private key pairs
- C. Compute Engine with project-wide SSH keys
- D. Compute Engine with specific SSH keys

Answer: A

Explanation:

<https://cloud.google.com/solutions/iot-overview> <https://cloud.google.com/iot/quotas>

NEW QUESTION 298

- (Exam Topic 7)

TerramEarth has about 1 petabyte (PB) of vehicle testing data in a private data center. You want to move the data to Cloud Storage for your machine learning team. Currently, a 1-Gbps interconnect link is available for you. The machine learning team wants to start using the data in a month. What should you do?

- A. Request Transfer Appliances from Google Cloud, export the data to appliances, and return the appliances to Google Cloud.
- B. Configure the Storage Transfer service from Google Cloud to send the data from your data center to Cloud Storage
- C. Make sure there are no other users consuming the 1 Gbps link, and use multi-thread transfer to upload the data to Cloud Storage.
- D. Export files to an encrypted USB device, send the device to Google Cloud, and request an import of the data to Cloud Storage

Answer: A

NEW QUESTION 300

- (Exam Topic 7)

TerramEarth has a legacy web application that you cannot migrate to cloud. However, you still want to build a cloud-native way to monitor the application. If the application goes down, you want the URL to point to a "Site is unavailable" page as soon as possible. You also want your Ops team to receive a notification for the issue. You need to build a reliable solution for minimum cost

What should you do?

- A. Create a scheduled job in Cloud Run to invoke a container every minut
- B. The container will check the application URL. If the application is down, switch the URL to the "Site is unavailable" page, and notify the Ops team.
- C. Create a cron job on a Compute Engine VM that runs every minut
- D. The cron job invokes a Python program to check the application URL. If the application is down, switch the URL to the "Site is unavailable" page, and notify the Ops team.
- E. Create a Cloud Monitoring uptime check to validate the application URL. If it fails, put a message in a Pub/Sub queue that triggers a Cloud Function to switch the URL to the "Site is unavailable" page, and notify the Ops team.
- F. Use Cloud Error Reporting to check the application URL. If the application is down, switch the URL to the "Site is unavailable" page, and notify the Ops team.

Answer: C

Explanation:

<https://cloud.google.com/blog/products/management-tools/how-to-use-pubsub-as-a-cloud-monitoring-notificatio>

NEW QUESTION 303

- (Exam Topic 7)

For this question, refer to the TerramEarth case study. To be compliant with European GDPR regulation, TerramEarth is required to delete data generated from its European customers after a period of 36 months when it contains personal data. In the new architecture, this data will be stored in both Cloud Storage and BigQuery. What should you do?

- A. Create a BigQuery table for the European data, and set the table retention period to 36 month
- B. For Cloud Storage, use gsutil to enable lifecycle management using a DELETE action with an Age condition of 36 months.
- C. Create a BigQuery table for the European data, and set the table retention period to 36 month
- D. For Cloud Storage, use gsutil to create a SetStorageClass to NONE action when with an Age condition of 36 months.
- E. Create a BigQuery time-partitioned table for the European data, and set the partition expiration period to 36 month
- F. For Cloud Storage, use gsutil to enable lifecycle management using a DELETE action with an Age condition of 36 months.
- G. Create a BigQuery time-partitioned table for the European data, and set the partition period to 36 month
- H. For Cloud Storage, use gsutil to create a SetStorageClass to NONE action with an Age condition of 36 months.

Answer: C

Explanation:

<https://cloud.google.com/bigquery/docs/managing-partitioned-tables#partition-expiration> <https://cloud.google.com/storage/docs/lifecycle>

NEW QUESTION 308

- (Exam Topic 8)

For this question, refer to the Mountkirk Games case study. You are in charge of the new Game Backend Platform architecture. The game communicates with the backend over a REST API.

You want to follow Google-recommended practices. How should you design the backend?

- A. Create an instance template for the backen
- B. For every region, deploy it on a multi-zone managed instance grou
- C. Use an L4 load balancer.
- D. Create an instance template for the backen

- E. For every region, deploy it on a single-zone managed instance group
- F. Use an L4 load balancer.
- G. Create an instance template for the backen
- H. For every region, deploy it on a multi-zone managed instance group
- I. Use an L7 load balancer.
- J. Create an instance template for the backen
- K. For every region, deploy it on a single-zone managed instance group
- L. Use an L7 load balancer.

Answer: C

Explanation:

https://cloud.google.com/solutions/gaming/cloud-game-infrastructure#dedicated_game_server

NEW QUESTION 311

- (Exam Topic 8)

For this question, refer to the Mountkirk Games case study. Which managed storage option meets Mountkirk's technical requirement for storing game activity in a time series database service?

- A. Cloud Bigtable
- B. Cloud Spanner
- C. BigQuery
- D. Cloud Datastore

Answer: A

Explanation:

<https://cloud.google.com/blog/products/databases/getting-started-with-time-series-trend-predictions-using-gcp>

NEW QUESTION 315

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

Professional-Cloud-Architect Practice Exam Features:

- * Professional-Cloud-Architect Questions and Answers Updated Frequently
- * Professional-Cloud-Architect Practice Questions Verified by Expert Senior Certified Staff
- * Professional-Cloud-Architect Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * Professional-Cloud-Architect Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The Professional-Cloud-Architect Practice Test Here](#)