

Oracle

Exam Questions 1Z0-071

Oracle Database 12c SQL



NEW QUESTION 1

In which normal form is a table, if it has no multi-valued attributes and no partial dependencies?

- A. second normal form
- B. first normal form
- C. third normal form
- D. fourth normal form

Answer: A

Explanation: References:
<https://blog.udemy.com/database-normal-forms/>

NEW QUESTION 2

Evaluate the following SQL statements that are issued in the given order:


```
CREATE TABLE emp
(emp_no NUMBER(2) CONSTRAINT emp_emp_no_pk PRIMARY KEY,
ename VARCHAR2(15),
salary NUMBER (8,2),
mgr_no NUMBER(2) CONSTRAINT emp_mgr_fk REFERENCES emp(emp_no));
ALTER TABLE emp
DISABLE CONSTRAINT emp_emp_no_pk CASCADE;
ALTER TABLE emp
ENABLE CONSTRAINT emp_emp_no_pk;
What would be the status of the foreign key EMP_MGR_PK?
```

- A. It would remain disabled and can be enabled only by dropping the foreign key constraint and recreating it.
- B. It would remain disabled and has to be enabled manually using the ALTER TABLE command.
- C. It would be automatically enabled and immediate.
- D. It would be automatically enabled and deferred.

Answer: B

NEW QUESTION 3

View the Exhibit and examine the structure of the EMPLOYEES and JOB_HISTORY tables. (Choose all that apply.)

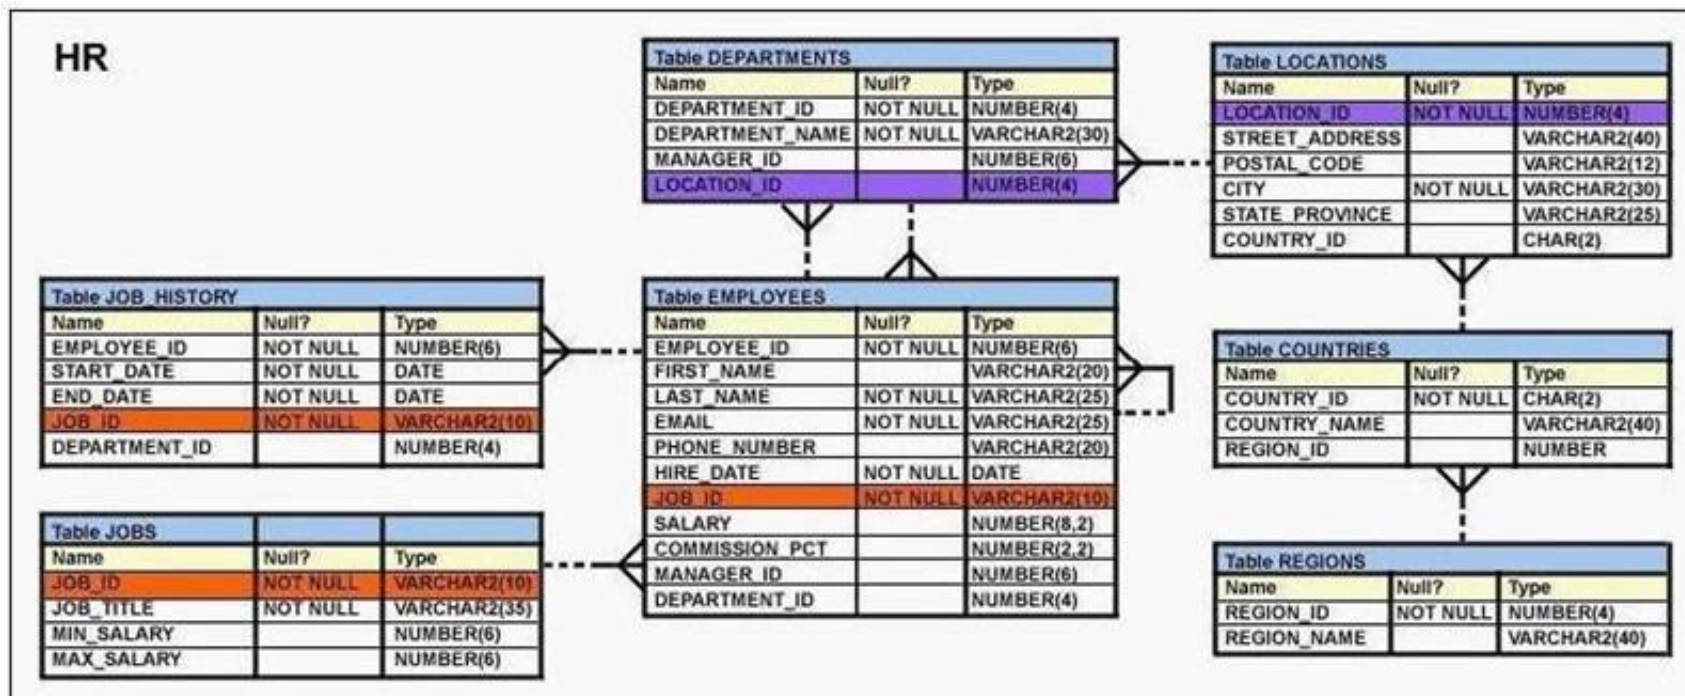

Examine this query which must select the employee IDs of all the employees who have held the job SA_MAN at any time during their employment.

```
SELECT EMPLOYEE_ID FROM EMPLOYEES WHERE JOB_ID = 'SA_MAN'
```

```
----- SELECT EMPLOYEE_ID FROM JOB_HISTORY WHERE JOB_ID = 'SA_MAN';
```

Choose two correct SET operators which would cause the query to return the desired result.

- A. UNION
- B. MINUS
- C. INTERSECT
- D. UNION ALL

Answer: AD

NEW QUESTION 4

Which two statements are true regarding the COUNT function?

- A. A SELECT statement using the COUNT function with a DISTINCT keyword cannot have a WHERE clause.
- B. COUNT (DISTINCT inv_amt) returns the number of rows excluding rows containing duplicates and NULL values in the INV_AMT column.
- C. COUNT (cust_id) returns the number of rows including rows with duplicate customer IDs and NULL value in the CUST_ID column.
- D. COUNT (*) returns the number of rows including duplicate rows and rows containing NULL value in any of the columns.
- E. The COUNT function can be used only for CHAR, VARCHAR2, and NUMBER data types.

Answer: BD

NEW QUESTION 5

Evaluate the following ALTER TABLE statement:

ALTER TABLE orders

SET UNUSED (order_date); Which statement is true?

- A. After executing the ALTER TABLE command, you can add a new column called ORDER_DATE to the ORDERS table.
- B. The ORDER_DATE column should be empty for the ALTER TABLE command to execute successfully.
- C. ROLLBACK can be used to get back the ORDER_DATE column in the ORDERS table.
- D. The DESCRIBE command would still display the ORDER_DATE column.

Answer: A

NEW QUESTION 6

You must display details of all users whose username contains the string 'ch_'. (Choose the best answer.) Which query generates the required output?

- A. SELECT * FROM users Where user_name LIKE '%ch_';
- B. SELECT * FROM usersWhere user_name LIKE '%ch_%'ESCAPE'%';
- C. SELECT * FROM users Where user_name LIKE 'ch_%' ESCAPE '_';
- D. SELECT * FROM users Where user_name LIKE '%ch_%' ESCAPE '\';

Answer: B

NEW QUESTION 7

Which two statements are true regarding constraints?

- A. A foreign key column cannot contain null values.
- B. A column with the UNIQUE constraint can contain null values.
- C. A constraint is enforced only for INSERT operation on the table.
- D. A constraint can be disabled even if the constraint column contains data.
- E. All constraints can be defined at the column level and at the table level.

Answer: BD

NEW QUESTION 8

The BOOKS_TRANSACTIONS table exists in your schema in this database.

You execute this SQL statement when connected to your schema in your database instance. SQL> SELECT * FROM books_transactions ORDER BY 3; What is the result?

- A. The execution fails unless the numeral 3 in the ORDER BY clause is replaced by a column name.
- B. All table rows are displayed sorted in ascending order of the values in the third column.
- C. The first three rows in the table are displayed in the order that they are stored.
- D. Only the three rows with the lowest values in the key column are displayed in the order that they are stored.

Answer: B

NEW QUESTION 9

You want to display 5 percent of the rows from the SALES table for products with the lowest AMOUNT_SOLD and also want to include the rows that have the same AMOUNT_SOLD even if this causes the output to exceed 5 percent of the rows.

Which query will provide the required result?

- A. SELECT prod_id, cust_id, amount_soldFROM salesORDER BY amount_soldFETCH FIRST 5 PERCENT ROWS WITH TIES;
- B. SELECT prod_id, cust_id, amount_soldFROM salesORDER BY amount_soldFETCH FIRST 5 PERCENT ROWS ONLY WITH TIES;
- C. SELECT prod_id, cust_id, amount_soldFROM salesORDER BY amount_soldFETCH FIRST 5 PERCENT ROWS WITH TIES ONLY;
- D. SELECT prod_id, cust_id, amount_soldFROM salesORDER BY amount_soldFETCH FIRST 5 PERCENT ROWS ONLY;

Answer: A

NEW QUESTION 10

Which statement is true regarding the UNION operator?

- A. By default, the output is not sorted.
- B. Null values are not ignored during duplicate checking.
- C. Names of all columns must be identical across all select statements.
- D. The number of columns selected in all select statements need not be the same.

Answer: B

NEW QUESTION 10

View the exhibit and examine the structure of the PROMOTIONS table.

Table PROMOTIONS		
Name	Null?	Type
PROMO_ID	NOT NULL	NUMBER(6)
PROMO_NAME	NOT NULL	VARCHAR2(30)
PROMO_SUBCATEGORY	NOT NULL	VARCHAR2(30)
PROMO_SUBCATEGORY_ID	NOT NULL	NUMBER
PROMO_CATEGORY	NOT NULL	VARCHAR2(30)
PROMO_CATEGORY_ID	NOT NULL	NUMBER
PROMO_COST	NOT NULL	NUMBER(10,2)
PROMO_BEGIN_DATE	NOT NULL	DATE
PROMO_END_DATE	NOT NULL	DATE

You have to generate a report that displays the promo name and start date for all promos that started after the last promo in the 'INTERNET' category. Which query would give you the required output?

- A. SELECT promo_name, promo_begin_date FROM promotions WHERE promo_begin_date > ALL (SELECT MAX (promo_begin_date) FROM promotions) AND promo_category = 'INTERNET';
- B. SELECT promo_name, promo_begin_date FROM promotions WHERE promo_begin_date IN (SELECT promo_begin_date FROM promotions WHERE promo_category = 'INTERNET');
- C. SELECT promo_name, promo_begin_date FROM promotions WHERE promo_begin_date > ALL (SELECT promo_begin_date FROM promotions WHERE promo_category = 'INTERNET');
- D. SELECT promo_name, promo_begin_date FROM promotions WHERE promo_begin_date > ANY (SELECT promo_begin_date FROM promotions WHERE promo_category = 'INTERNET');

Answer: C

NEW QUESTION 13

Which two tasks can be performed by using Oracle SQL statements?

- A. changing the password for an existing database user
- B. connecting to a database instance
- C. querying data from tables across databases
- D. starting up a database instance
- E. executing operating system (OS) commands in a session

Answer: AC


Explanation: References:

<http://www.techonthenet.com/oracle/password.php>

https://docs.oracle.com/cd/B28359_01/server.111/b28324/tdpii_distdb.htm

NEW QUESTION 16

View the Exhibit and examine the structure of the ORDERS table.

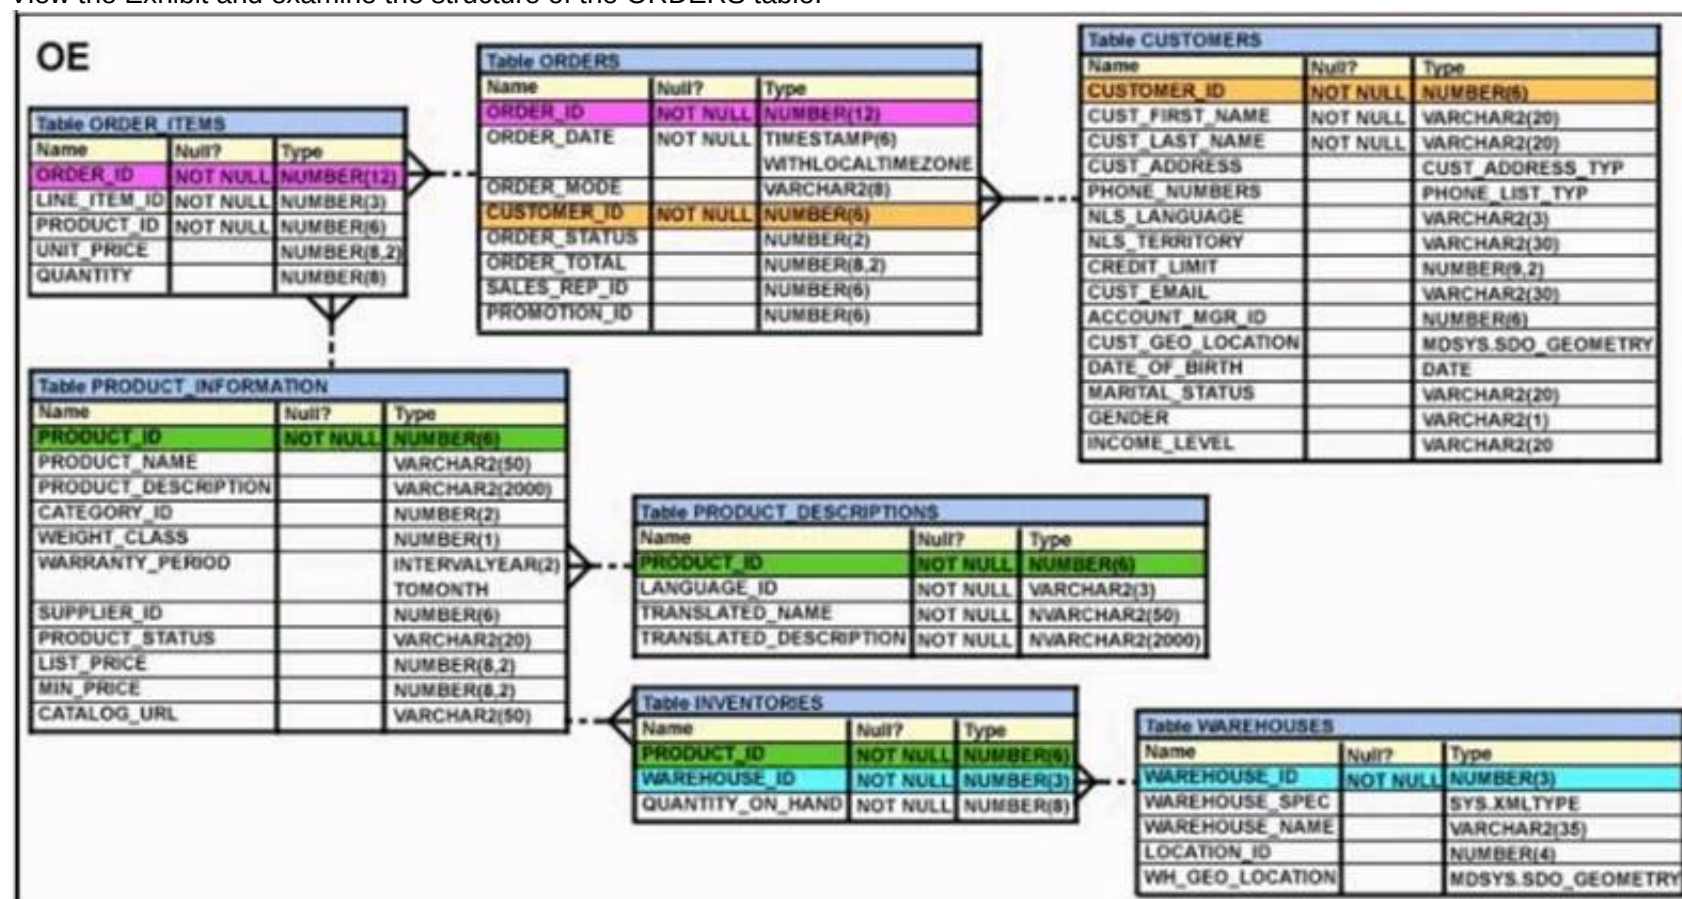

Which UPDATE statement is valid?

- A. UPDATE orders SET order_date = '12-mar-2007', order_total IS NULL WHERE order_id = 2455;
- B. UPDATE orders SET order_date = '12-mar-2007', AND order_total = TO_NUMBER(NULL) WHERE order_id = 2455;
- C. UPDATE orders SET order_date = '12-mar-2007', order_total = NULL WHERE order_id = 2455;
- D. UPDATE orders SET order_date = TO_DATE('12-mar-2007', 'dd-mon-yyyy'), SET order_total = TO_NUMBER (NULL) WHERE order_id = 2455;

Answer: C

NEW QUESTION 19


You issued the following command: SQL> DROP TABLE employees; Which three statements are true?

- A. All uncommitted transactions are committed.
- B. All indexes and constraints defined on the table being dropped are also dropped.
- C. Sequences used in the employees table become invalid.
- D. The space used by the employees table is reclaimed immediately.
- E. The employees table can be recovered using the rollback command.
- F. The employees table is moved to the recycle bin

Answer: ABF

NEW QUESTION 22

View the exhibit and examine the description of the PRODUCT_INFORMATION table.

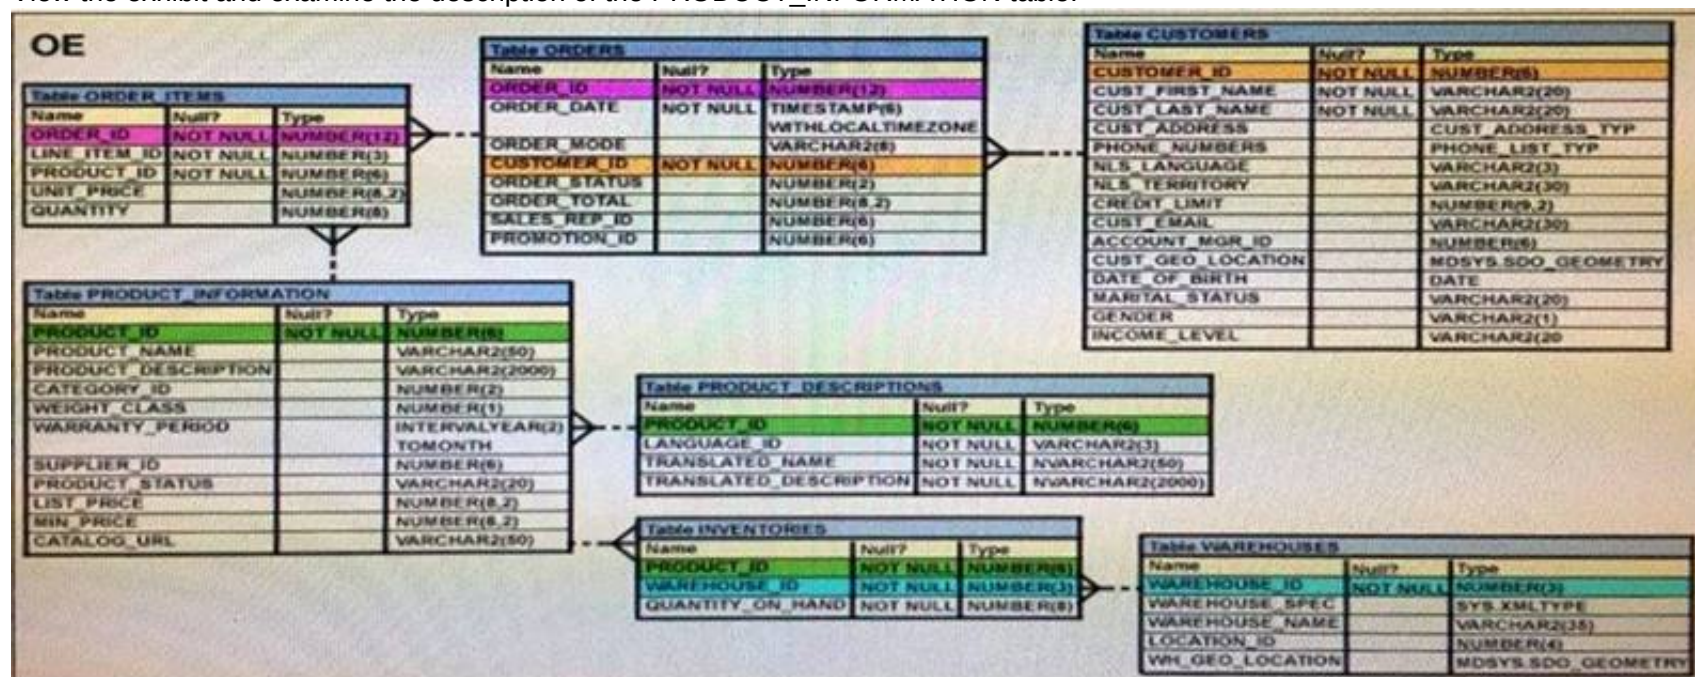

Which SQL statement would retrieve from the table the number of products having LIST_PRICE as NULL?

- A. SELECT COUNT (DISTINCT list_price)FROM product_informationWHERE list_price is NULL
- B. SELECT COUNT (NVL(list_price, 0))FROM product_informationWHERE list_price is NULL
- C. SELECT COUNT (list_price)FROM product_informationWHERE list_price != NULL
- D. SELECT COUNT (list_price)FROM product_informationWHERE list_price is NULL

Answer: B

NEW QUESTION 26

Examine the create table statements for the stores and sales tables.

SQL> CREATE TABLE stores(store_id NUMBER(4) CONSTRAINT store_id_pk PRIMARY KEY, store_name VARCHAR2(12), store_address VARCHAR2(20), start_date DATE);

SQL> CREATE TABLE sales(sales_id NUMBER(4) CONSTRAINT sales_id_pk PRIMARY KEY, item_id NUMBER(4), quantity NUMBER(10), sales_date DATE, store_id NUMBER(4), CONSTRAINT store_id_fk FOREIGN KEY(store_id) REFERENCES stores(store_id));

You executed the following statement: SQL> DELETE from stores

WHERE store_id=900;

The statement fails due to the integrity constraint error:

ORA-02292: integrity constraint (HR.STORE_ID_FK) violated

Which three options ensure that the statement will execute successfully?

- A. Disable the primary key in the STORES table.
- B. Use CASCADE keyword with DELETE statement.
- C. DELETE the rows with STORE_ID = 900 from the SALES table and then delete rows from STORES table.
- D. Disable the FOREIGN KEY in SALES table and then delete the rows.
- E. Create the foreign key in the SALES table on SALES_ID column with on DELETE CASCADE option.

Answer: CDE

NEW QUESTION 30

On your Oracle 12c database, you invoked SQL *Loader to load data into the EMPLOYEES table in the HR schema by issuing the following command:

\$> sqlldr hr/hr@pdb table=employees

Which two statements are true regarding the command?

- A. It succeeds with default settings if the EMPLOYEES table belonging to HR is already defined in the database.
- B. It fails because no SQL *Loader data file location is specified.
- C. It fails if the HR user does not have the CREATE ANY DIRECTORY privilege.
- D. It fails because no SQL *Loader control file location is specified.

Answer: AC

NEW QUESTION 31

Which two statements are true regarding savepoints? (Choose two.)

- A. Savepoints may be used to ROLLBACK.
- B. Savepoints can be used for only DML statements.
- C. Savepoints are effective only for COMMIT.
- D. Savepoints are effective for both COMMIT and ROLLBACK.
- E. Savepoints can be used for both DML and DDL statements.

Answer: AB

NEW QUESTION 32

Examine the structure of the MEMBERS table: NameNull?Type

----- MEMBER_IDNOT NULLVARCHAR2 (6)

FIRST_NAMEVARCHAR2 (50)

LAST_NAMENOT NULLVARCHAR2 (50)

ADDRESSVARCHAR2 (50)

CITYVARCHAR2 (25)

STATEVARCHAR2 (3)

You want to display details of all members who reside in states starting with the letter A followed by exactly one character. Which SQL statement must you execute?

- A. SELECT * FROM MEMBERS WHERE state LIKE '%A_*';
- B. SELECT * FROM MEMBERS WHERE state LIKE 'A_*';
- C. SELECT * FROM MEMBERS WHERE state LIKE 'A_%';
- D. SELECT * FROM MEMBERS WHERE state LIKE 'A%';

Answer: B

NEW QUESTION 37

Which statement is true about transactions?

- A. A set of Data Manipulation Language (DML) statements executed in a sequence ending with a SAVEPOINT forms a single transaction.
- B. Each Data Definition Language (DDL) statement executed forms a single transaction.
- C. A set of DDL statements executed in a sequence ending with a COMMIT forms a single transaction.
- D. A combination of DDL and DML statements executed in a sequence ending with a COMMIT forms a single transaction.

Answer: B


Explanation: References:

<https://docs.oracle.com/database/121/CNCPT/transact.htm#CNCPT038>

NEW QUESTION 40

View the Exhibit and examine, the description for the SALES and CHANNELS tables. (Choose the best answer.)

SH

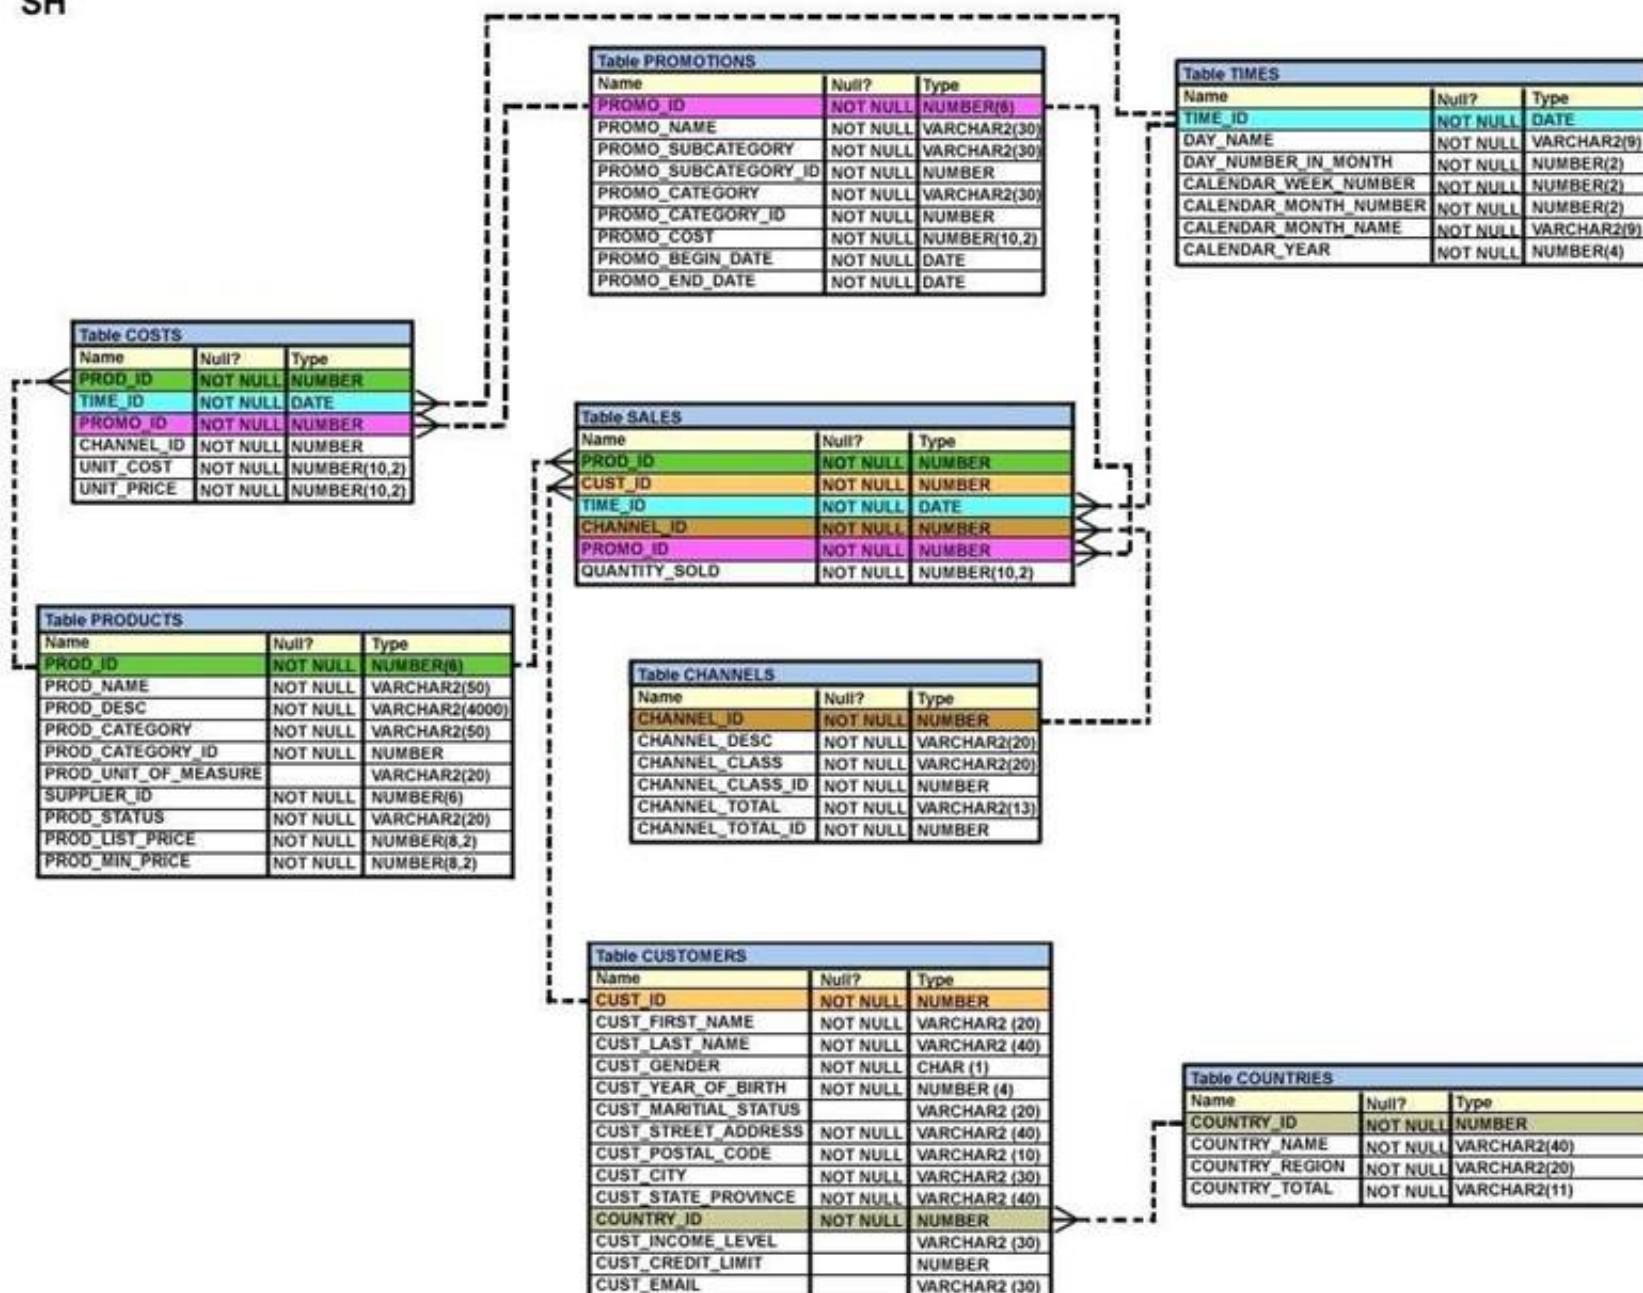

You issued this SQL statement:

```
INSERT INTO SALES VALUES (23, 2300, SYSDATE, (SELECT CAHNNEL_ID
FROM CHANNELS
WHERE CHANNEL_DESC='DIRECT SALES'), 12, 1, 500);
```

Which statement is true regarding the result?


- A. The statement will fail because the sub-query in the VALUES clause is not enclosed within single quotation marks.
- B. The statement will fail because a subquery cannot be used in a VALUES clause.
- C. The statement will execute and a new row will be inserted in the SALES table.
- D. The statement will fail because the VALUES clause is not required with the subquery.

Answer: C

NEW QUESTION 45

View the exhibit and examine the structure of the SALES, CUSTOMERS, PRODUCTS and TIMES tables.

SH

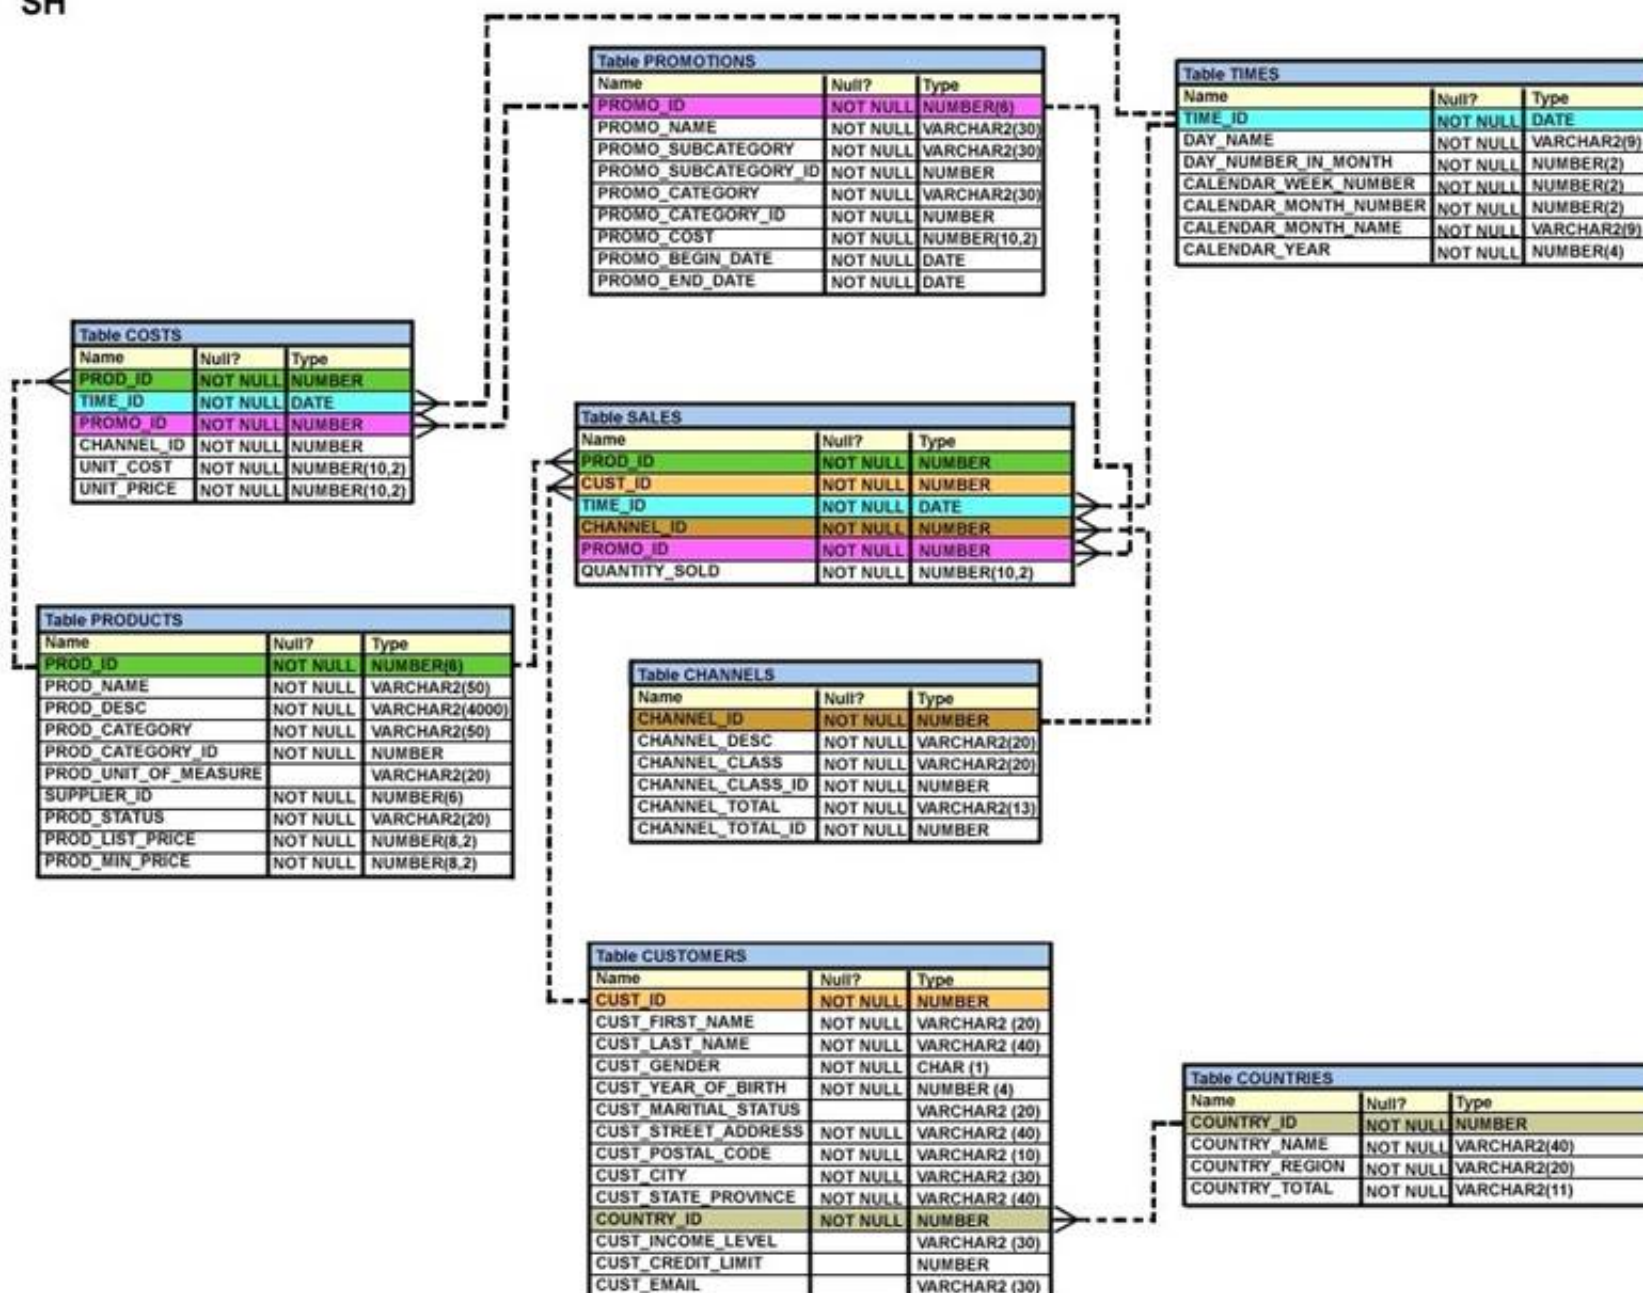

The PROD_ID column is the foreign key in the SALES table referencing the PRODUCTS table.

The CUST_ID and TIME_ID columns are also foreign keys in the SALES table referencing the CUSTOMERS and TIMES tables, respectively.

Examine this command:

```
CREATE TABLE new_sales (prod_id, cust_id, order_date DEFAULT SYSDATE)
```

AS

```
SELECT prod_id, cust_id, time_id FROM sales;
```

Which statement is true?

- A. The NEW_SALES table would get created and all the FOREIGN KEY constraints defined on the selected columns from the SALES table would be created on the corresponding columns in the NEW_SALES table.
- B. The NEW_SALES table would not get created because the column names in the CREATE TABLE command and the SELECT clause do not match.
- C. The NEW_SALES table would not get created because the DEFAULT value cannot be specified in the column definition.
- D. The NEW_SALES table would get created and all the NOT NULL constraints defined on the selected columns from the SALES table would be created on the corresponding columns in the NEW_SALES table.

Answer: D

NEW QUESTION 47

View the Exhibit and examine the structure of the SALES and PRODUCTS tables. (Choose two.)

SALES

Name	Null?	Type
PROD_ID	NOT NULL	NUMBER (3)
CUST_ID	NOT NULL	NUMBER (4)
TIME_ID		DATE
QTY_SOLD		NUMBER (10,2)

PRODUCTS

Name	Null?	Type
PROD_ID	NOT NULL	NUMBER (3)
PROD_NAME		VARCHAR2 (30)
PROD_LIST_PRICE		NUMBER (8,2)

In the SALES table, PROD_ID is the foreign key referencing PROD_ID in the PRODUCTS table. You must list each product ID and the number of times it has been sold.

Examine this query which is missing a JOIN operator: SQL > SELECT p.prod_id, count(s.prod_id)
 FROM products p sales s ON p.prod_id = s.prod_id
 GROUP BY p.prod_id;
 Which two JOIN operations can be used to obtain the required output?

- A. FULL OUTER JOIN
- B. JOIN
- C. LEFT OUTER JOIN
- D. RIGHT OUTER JOIN

Answer: AC

NEW QUESTION 50

View the Exhibit and examine the structure of the PROMOTION table.

Table PROMOTIONS		
Name	Null?	Type
PROMO_ID	NOT NULL	NUMBER(6)
PROMO_NAME	NOT NULL	VARCHAR2(30)
PROMO_SUBCATEGORY	NOT NULL	VARCHAR2(30)
PROMO_SUBCATEGORY_ID	NOT NULL	NUMBER
PROMO_CATEGORY	NOT NULL	VARCHAR2(30)
PROMO_CATEGORY_ID	NOT NULL	NUMBER
PROMO_COST	NOT NULL	NUMBER(10,2)
PROMO_BEGIN_DATE	NOT NULL	DATE
PROMO_END_DATE	NOT NULL	DATE

You have to generate a report that displays the promo named start data for all promos that started after that last promo in the 'INTERNET' category.

- A. Select promo_name, promo_begin_date FROM promotions WHERE promo_begin_date > ANY (SELECT promo_begin_date FROM promotions WHERE promo_category = 'INTERNET')
- B. SELECT promo_name, promo_begin_date FROM promotions WHERE promo_begin_date > All (SELECT promo_begin_date FROM promotions WHERE promo_category = 'INTERNET');
- C. SELECT promo_name, promo_begin_date FROM promotions Where promo_begin_date > ALL (SELECT MAX (promo_begin_date) FROM promotions) AND Promo_category = 'INTERNET';
- D. SELECT promo_name, promo_begin_date FROM promotion WHERE promo_begin_date IN (SELECT promo_begin_date FROM promotions WHERE promo_category = 'INTERNET');

Answer: B

NEW QUESTION 54

Examine the business rule:

Each student can work on multiple projects and each project can have multiple students.

You need to design an Entity Relationship Model (ERD) for optimal data storage and allow for generating reports in this format:

STUDENT_ID FIRST_NAME LAST_NAME PROJECT_ID PROJECT_NAME PROJECT_TASK

Which two statements are true in this scenario?

- A. The ERD must have a 1:M relationship between the STUDENTS and PROJECTS entities.
- B. The ERD must have a M:M relationship between the STUDENTS and PROJECTS entities that must be resolved into 1:M relationships.
- C. STUDENT_ID must be the primary key in the STUDENTS entity and foreign key in the PROJECTS entity.
- D. PROJECT_ID must be the primary key in the PROJECTS entity and foreign key in the STUDENTS entity.
- E. An associative table must be created with a composite key of STUDENT_ID and PROJECT_ID, which is the foreign key linked to the STUDENTS and PROJECTS entities.

Answer: BE

Explanation: References:

<http://www.oracle.com/technetwork/issue-archive/2011/11-nov/o61sql-512018.html>

NEW QUESTION 56

You need to display the date 11-oct-2007 in words as 'Eleventh of October, Two Thousand Seven'. Which SQL statement would give the required result?

- A. SELECT TO_CHAR (TO_DATE ('11-oct-2007'), 'fmDdthsp "of" Month, Year')FROM DUAL
- B. SELECT TO_CHAR ('11-oct-2007', 'fmDdspth "of" Month, Year')FROM DUAL
- C. SELECT TO_CHAR (TO_DATE ('11-oct-2007'), 'fmDdspth of month, year')FROM DUAL
- D. SELECT TO_DATE (TO_CHAR ('11-oct-2007'), 'fmDdspth "of" Month, Year'))FROM DUAL

Answer: C

NEW QUESTION 57

Examine the SQL statement used to create the TRANSACTION table. (Choose the best answer.)

SQL > CREATE TABLE transaction (trn_id char(2) primary key,

Start_date date DEFAULT SYSDATE, End_date date NOT NULL);

The value 'A1' does not exist for trn_id in this table.

Which SQL statement successfully inserts a row into the table with the default value for START_DATE?

- A. INSERT INTO transaction VALUES ('A1', DEFAULT, TO_DATE(DEFAULT+10))
- B. INSERT INTO transaction VALUES ('A1', DEFAULT, TO_DATE('SYSDATE+10'))
- C. INSERT INTO transaction (trn_id, end_date) VALUES ('A1', '10-DEC-2014')
- D. INSERT INTO transaction (trn_id, start_date, end_date) VALUES ('A1', , '10-DEC-2014')

Answer: C

NEW QUESTION 62

Evaluate the following CRTEATE TABLE commands:

CREATE_TABLE orders

(ord_no NUMBER (2) CONSTRAINT ord_pk PRIMARY KEY,

ord_date DATE, cust_id NUMBER (4));

CREATE TABLE ord_items (ord_no NUMBER (2),

item_no NUMBER(3),

qty NUMBER (3) CHECK (qty BETWEEN 100 AND 200),

expiry_date date CHECK (expiry_date> SYSDATE), CONSTRAINT it_pk PRIMARY KEY (ord_no, item_no),

CONSTRAINT ord_fk FOREIGN KEY (ord_no) REFERENCES orders (ord_no)); Why would the ORD_ITEMS table not get created?

- A. SYSDATE cannot be used with the CHECK constraint.
- B. The BETWEEN clause cannot be used for the CHECK constraint.
- C. The CHECK constraint cannot be placed on columns having the DATE data type.
- D. ORD_NO and ITEM_NO cannot be used as a composite primary key because ORD_NO is also the FOREIGN KEY.

Answer: A

NEW QUESTION 64

Examine the structure proposed for the TRANSACTIONS table:

Name	Null?	Type
-----	-----	-----
TRANS_ID	NOT NULL	NUMBER (6)
CUST_NAME	NOT NULL	VARCHAR2 (20)
CUST_STATUS	NOT NULL	VARCHAR2
TRANS_DATE	NOT NULL	DATE
TRANS_VALIDITY		INTERVAL DAY TO SECOND
CUST_CREDIT_VALUE		NUMBER (10)

Which two statements are true regarding the storage of data in the above table structure? (Choose two.)

- A. The CUST_CREDIT_VALUE column would allow storage of positive and negative integers.
- B. The TRANS_VALIDITY column would allow storage of a time interval in days, hours, minutes, and seconds.
- C. The CUST_STATUS column would allow storage of data up to the maximum VARCHAR2 size of 4,000 characters.
- D. The TRANS_DATE column would allow storage of dates only in the dd-mon-yyyy format.

Answer: AB

NEW QUESTION 67

View the Exhibit and examine the data in the PRODUCTS table. (Choose the best answer.)

PRODUCTS

PROD_ID	PROD_NAME	PROD_CATEGORY	PROD_MIN_PRICE	PROD_UNIT_OF_MEASURE
101	Envoy 156MB-40GB	Hardware	6000	Nos.
102	Y Box	Electronics	9000	
103	DVD-R Disc, 4.7 GB	Software/Other	2000	Nos.
104	Documentation	Software/Other	4000	

You must display product names from the PRODUCTS table that belong to the 'Software/other' category with minimum prices as either \$2000 or \$4000 and with no unit of measure.

You issue this query:


SQL > SELECT prod_name, prod_category, prod_min_price FROM products
 Where prod_category LIKE '%Other%' AND (prod_min_price = 2000 OR prod_min_price = 4000) AND prod_unit_of_measure <> '';
 Which statement is true?

- A. It executes successfully but returns no result.
- B. It executes successfully and returns the required result.
- C. It generates an error because the condition specified for PROD_UNIT_OF_MEASURE is not valid.
- D. It generates an error because the condition specified for the PROD_CATEGORY column is not valid.

Answer: A

NEW QUESTION 68

View the exhibit and examine the structure of the EMPLOYEES table.

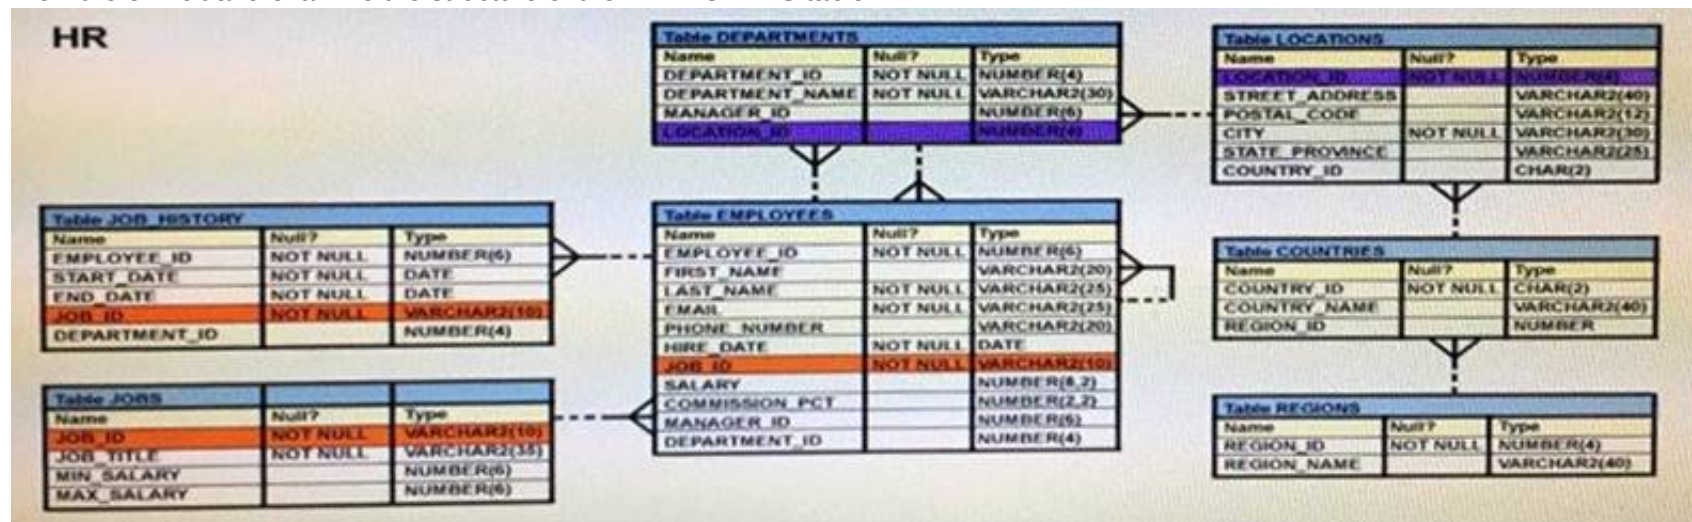

You want to display all employees and their managers having 100 as the MANAGER_ID. You want the output in two columns: the first column would have the LAST_NAME of the managers and the second column would have LAST_NAME of the employees.
 Which SQL statement would you execute?

- A. SELECT m.last_name "Manager", e.last_name "Employee" FROM employees m JOIN employees e ON m.employee_id = e.manager_id WHERE m.manager_id = 100;
- B. SELECT m.last_name "Manager", e.last_name "Employee" FROM employees m JOIN employees e ON m.employee_id = e.manager_id WHERE e.manager_id = 100;
- C. SELECT m.last_name "Manager", e.last_name "Employee" FROM employees m JOIN employees e ON e.employee_id = m.manager_id WHERE m.manager_id = 100;
- D. SELECT m.last_name "Manager", e.last_name "Employee" FROM employees m JOIN employees e WHERE m.employee_id = e.manager_id and AND e.manager_id = 100

Answer: B

NEW QUESTION 70

Which two statements are true regarding the SQL GROUP BY clause?

- A. You can use a column alias in the GROUP BY clause.
- B. Using the WHERE clause after the GROUP BY clause excludes rows after creating groups.
- C. The GROUP BY clause is mandatory if you are using an aggregating function in the SELECT clause.
- D. Using the WHERE clause before the GROUP BY clause excludes rows before creating groups.
- E. If the SELECT clause has an aggregating function, then columns without an aggregating function in the SELECT clause should be included in the GROUP BY clause.

Answer: DE

NEW QUESTION 71

Which three statements are true reading subqueries?

- A. A Main query can have many subqueries.
- B. A subquery can have more than one main query.
- C. The subquery and main query must retrieve data from the same table.
- D. The subquery and main query can retrieve data from different tables.
- E. Only one column or expression can be compared between the subquery and main query.
- F. Multiple columns or expressions can be compared between the subquery and main query.

Answer: ADF

NEW QUESTION 74

View the Exhibit and examine the structures of the employees and departments tables.

EMPLOYEES		
Name	Null?	Type

EMPLOYEE_ID	NOT NULL	NUMBER(6)
FIRST_NAME		VARCHAR2(20)
LAST_NAME	NOT NULL	VARCHAR2(25)
HIRE_DATE	NOT NULL	DATE
JOB_ID	NOT NULL	VARCHAR2(10)
SALARY		NUMBER(10,2)
COMMISSION		NUMBER(6,2)
MANAGER_ID		NUMBER(6)
DEPARTMENT_ID		NUMBER(4)
DEPARTMENTS		
Name	Null?	Type

DEPARTMENT_ID	NOT NULL	NUMBER(4)
DEPARTMENT_NAME	NOT NULL	VARCHAR2(30)
MANAGER_ID		NUMBER(6)
LOCATION_ID		NUMBER(4)

You must update the employees table according to these requirements::

- Update only those employees who work in Boston or Seattle (locations 2900 and 2700).
- Set department_id for these employees to the department id corresponding to London (locationid 2100).
- Set the employees' salary in location_id 2100 to 1.1 times the average salary of their department.
- Set the employees' commission in location_id 2100 to 1.5 times the average commission of their department. You issue this command:

```
SQL> UPDATE employees
SET department_id =
  (SELECT department_id
   FROM departments
   WHERE location_id = 2100),
(salary, commission) =
  (SELECT 1.1*AVG(salary), 1.5*AVG(commission)
   FROM employees, departments
   WHERE departments.location_id IN(2900,2700,2100))
WHERE department_id IN
  (SELECT department_id
   FROM departments
   WHERE location_id = 2900
   OR location_id = 2700);
```

What is the result?

- A. It executes successfully but does not produce the desired update.
- B. It executes successfully and produces the desired update.
- C. It generates an error because multiple columns cannot be specified together in an UPDATE statement.
- D. It generates an error because a subquery cannot have a join condition in an update statement.

Answer: A

NEW QUESTION 76

You execute the SQL statement: SQL> CREATE TABLE citizens
(citizen_id CHAR (10) PRIMARY KEY, last_name VARCHAR2 (50) NOT NULL, first_name VARCHAR2 (50),
address VARCHAR2 (100),
city VARCHAR2 (30) DEFAULT 'SEATTLE' NOT NULL,
CONSTRAINT cnames CHECK (first_name<>last_name)); What is the outcome?

- A. It fails because the NOT NULL and DEFAULT options cannot be combined for the same column.
- B. It succeeds and CITY can contain only 'SEATTLE' or null for all rows.
- C. It fails because the condition for the CANAMES constraint is not valid.
- D. It succeeds and an index is crated for CITIZEN_ID.

Answer: A

NEW QUESTION 81

n the customers table, the CUST_CITY column contains the value 'Paris' for the CUST_FIRST_NAME 'Abigail'.
Evaluate the following query:


```
SQL> SELECT INITCAP(cust_first_name || ' ' ||
                UPPER(SUBSTR(cust_city,-LENGTH(cust_city),2)))
FROM customers
WHERE cust_first_name = 'Abigail';
```

What would be the outcome?

- A. Abigail PA
- B. Abigail Pa
- C. Abigail IS
- D. An error message

Answer: B

NEW QUESTION 82

When does a transaction complete? (Choose all that apply.)

- A. When a PL/SQL anonymous block is executed
- B. When a DELETE statement is executed
- C. When a data definition language statement is executed
- D. When a TRUNCATE statement is executed after the pending transaction
- E. When a ROLLBACK command is executed

Answer: CDE

NEW QUESTION 86

View the exhibits and examine the structures of the COSTS and PROMOTIONS tables.

Table COSTS		
Name	Null?	Type
PROD_ID	NOT NULL	NUMBER
TIME_ID	NOT NULL	DATE
PROMO_ID	NOT NULL	NUMBER
CHANNEL_ID	NOT NULL	NUMBER
UNIT_COST	NOT NULL	NUMBER(10,2)
UNIT_PRICE	NOT NULL	NUMBER(10,2)

Table PROMOTIONS		
Name	Null?	Type
PROMO_ID	NOT NULL	NUMBER(6)
PROMO_NAME	NOT NULL	VARCHAR2(30)
PROMO_SUBCATEGORY	NOT NULL	VARCHAR2(30)
PROMO_SUBCATEGORY_ID	NOT NULL	NUMBER
PROMO_CATEGORY	NOT NULL	VARCHAR2(30)
PROMO_CATEGORY_ID	NOT NULL	NUMBER
PROMO_COST	NOT NULL	NUMBER(10,2)
PROMO_BEGIN_DATE	NOT NULL	DATE
PROMO_END_DATE	NOT NULL	DATE

Evaluate the following SQL statement: SQL> SELECT prod_id FROM costs
WHERE promo_id IN (SELECT promo_id FROM promotions WHERE promo_cost < ALL
(SELECT MAX(promo_cost) FROM promotions GROUP BY (promo_end_date- promo_begin_date)));
What would be the outcome of the above SQL statement?

- A. It displays prod IDs in the promo with the lowest cost.
- B. It displays prod IDs in the promos with the lowest cost in the same time interval.
- C. It displays prod IDs in the promos with the highest cost in the same time interval.
- D. It displays prod IDs in the promos which cost less than the highest cost in the same time interval.

Answer: D

NEW QUESTION 89

Which statements are true? (Choose all that apply.)

- A. The data dictionary is created and maintained by the database administrator.
- B. The data dictionary views consists of joins of dictionary base tables and user-defined tables.
- C. The usernames of all the users including the database administrators are stored in the data dictionary.
- D. The USER_CONS_COLUMNS view should be queried to find the names of the columns to which a constraint applies.
- E. Both USER_OBJECTS and CAT views provide the same information about all the objects that are owned by the user.
- F. Views with the same name but different prefixes, such as DBA, ALL and USER, use the same base tables from the data dictionary.

Answer: CDF

Explanation: References:
https://docs.oracle.com/cd/B10501_01/server.920/a96524/c05dicti.htm

NEW QUESTION 92

Which statement is true regarding the INTERSECT operator?

- A. The names of columns in all SELECT statements must be identical.
- B. It ignores NULL values.
- C. Reversing the order of the intersected tables alters the result.
- D. The number of columns and data types must be identical for all SELECT statements in the query.

Answer: D

Explanation: INTERSECT Returns only the rows that occur in both queries' result sets, sorting them and removing duplicates.

The columns in the queries that make up a compound query can have different names, but the output result set will use the names of the columns in the first query.

References:

<http://oraclexpert.com/using-the-set-operators/>

NEW QUESTION 95

Which two statements are true regarding constraints?

- A. A table can have only one primary key and one foreign key.
- B. A table can have only one primary key but multiple foreign keys.
- C. Only the primary key can be defined at the column and table levels.
- D. The foreign key and parent table primary key must have the same name.
- E. Both primary key and foreign key constraints can be defined at both column and table levels.

Answer: BE

NEW QUESTION 100

View the exhibit and examine the descriptions of the DEPT and LOCATIONS tables.

DEPT		
Name	Null?	Type
DEPARTMENT_ID		NUMBER(4)
DEPARTMENT_NAME	NOT NULL	VARCHAR2(30)
MANAGER_ID		NUMBER(6)
LOCATION_ID		NUMBER(4)
CITY		VARCHAR2(30)

LOCATIONS		
Name	Null?	Type
LOCATION_ID	NOT NULL	NUMBER(4)
STREET_ADDRESS		VARCHAR2(40)
POSTAL_CODE		VARCHAR2(12)
CITY	NOT NULL	VARCHAR2(30)
STATE_PROVINCE		VARCHAR2(25)
COUNTRY_ID		CHAR(2)

You want to update the CITY column of the DEPT table for all the rows with the corresponding value in the CITY column of the LOCATIONS table for each department.

Which SQL statement would you execute to accomplish the task?

- A. UPDATE dept dSET city = ALL (SELECT cityFROM locations IWHERE d.location_id = I.location_id);
- B. UPDATE dept dSET city = (SELECT cityFROM locations I)WHERE d.location_id = I.location_id;
- C. UPDATE dept dSET city = ANY (SELECT cityFROM locations I)
- D. UPDATE dept dSET city = (SELECT cityFROM locations IWHERE d.location_id = I.location_id);

Answer: D

NEW QUESTION 103

View the Exhibit and examine the structure of the CUSTOMERS table.

Table CUSTOMERS		
Name	Null?	Type
CUST_ID	NOT NULL	NUMBER
CUST_FIRST_NAME	NOT NULL	VARCHAR2 (20)
CUST_LAST_NAME	NOT NULL	VARCHAR2 (40)
CUST_GENDER	NOT NULL	CHAR (1)
CUST_YEAR_OF_BIRTH	NOT NULL	NUMBER (4)
CUST_MARITAL_STATUS		VARCHAR2 (20)
CUST_STREET_ADDRESS	NOT NULL	VARCHAR2 (40)
CUST_POSTAL_CODE	NOT NULL	VARCHAR2 (10)
CUST_CITY	NOT NULL	VARCHAR2 (30)
CUST_STATE_PROVINCE	NOT NULL	VARCHAR2 (40)
COUNTRY_ID	NOT NULL	NUMBER
CUST_INCOME_LEVEL		VARCHAR2 (30)
CUST_CREDIT_LIMIT		NUMBER
CUST_EMAIL		VARCHAR2 (30)

Using the CUSTOMERS table, you must generate a report that displays a credit limit increase of 15% for all customers.

Customers with no credit limit should have "Not Available" displayed. Which SQL statement would produce the required result?

- A. SELECT NVL (TO_CHAR(cust_credit_limit*.15), 'Not Available') "NEW CREDIT" FROM customers
- B. SELECT TO_CHAR(NVL(cust_credit_limit*.15, 'Not Available')) "NEW CREDIT" FROM customers
- C. SELECT NVL (cust_credit_limit*.15, 'Not Available') "NEW CREDIT" FROM customers
- D. SELECT NVL (cust_credit_limit, 'Not Available')*.15 "NEW CREDIT" FROM customers

Answer: C

NEW QUESTION 104

Which task can be performed by using a single Data Manipulation Language (DML) statement?

- A. adding a column constraint when inserting a row into a table
- B. adding a column with a default value when inserting a row into a table
- C. removing all data only from one single column on which a unique constraint is defined
- D. removing all data only from one single column on which a primary key constraint is defined

Answer: C

NEW QUESTION 109

Which statement is true regarding the default behavior of the ORDER BY clause?

- A. In a character sort, the values are case-sensitive.
- B. NULL values are not considered at all by the sort operation.
- C. Only those columns that are specified in the SELECT list can be used in the ORDER BY clause.
- D. Numeric values are displayed from the maximum to the minimum value if they have decimal positions.

Answer: A

NEW QUESTION 111

Which statements are correct regarding indexes? (Choose all that apply.)

- A. A non-deferrable PRIMARY KEY or UNIQUE KEY constraint in a table automatically attempts to create a unique index.
- B. Indexes should be created on columns that are frequently referenced as part of any expression.
- C. When a table is dropped, the corresponding indexes are automatically dropped.
- D. For each DML operation performed, the corresponding indexes are automatically updated.


Answer: ACD

Explanation: References:

<http://viralpatel.net/blogs/understanding-primary-keypk-constraint-in-oracle/>

NEW QUESTION 116

View the Exhibit and examine the structure of the PRODUCT_INFORMATION and INVENTORIES tables.

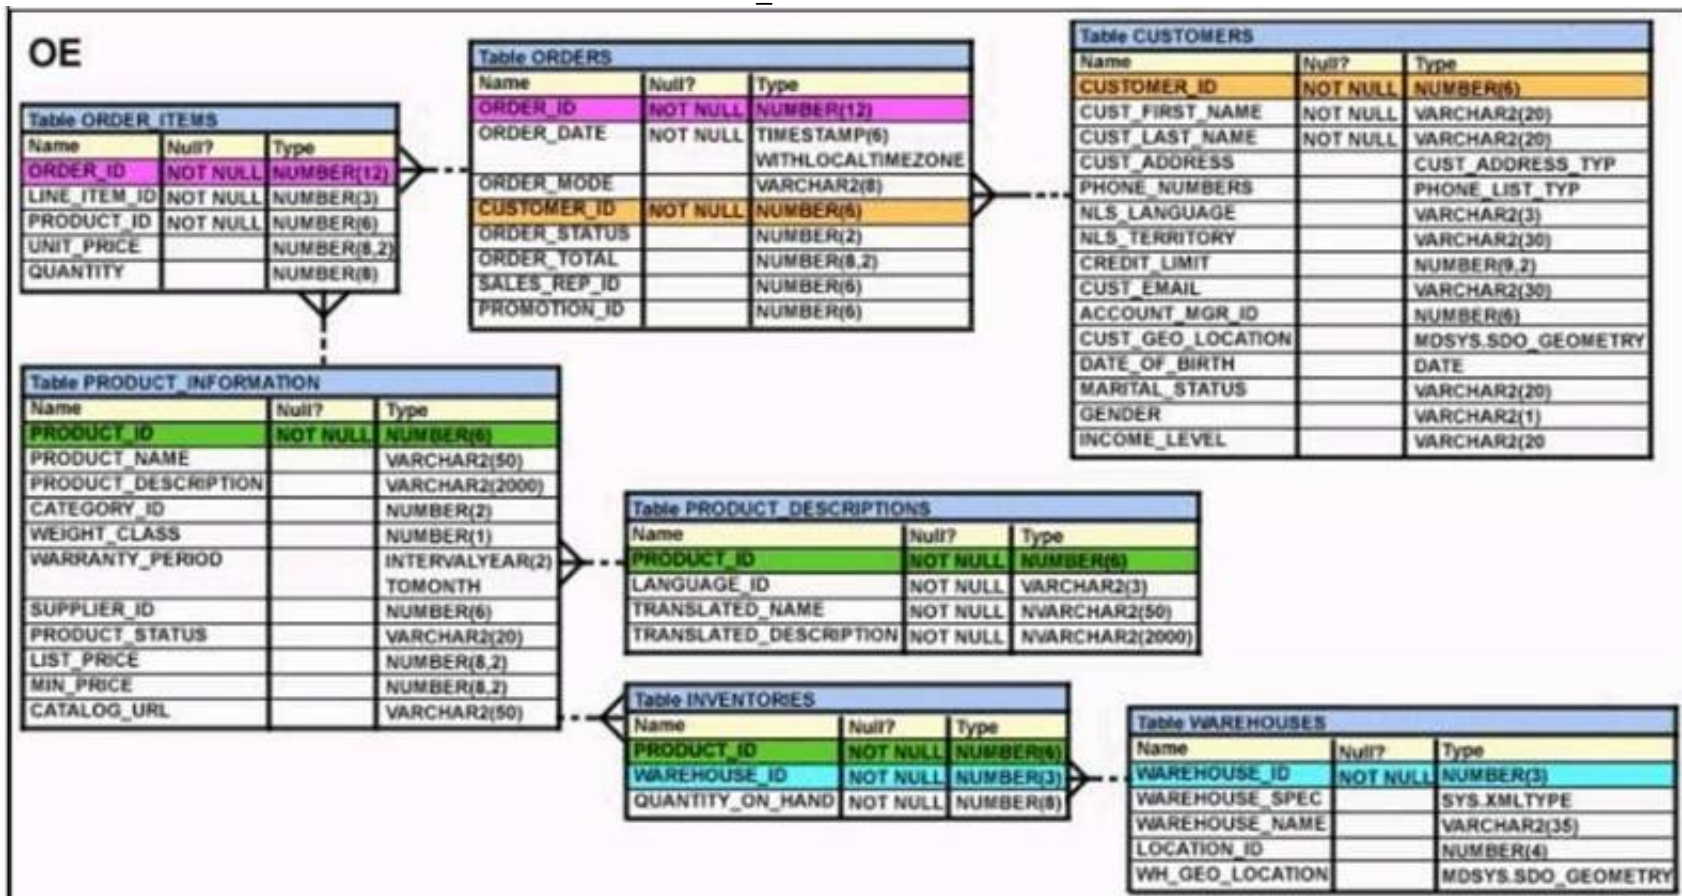

You have a requirement from the supplies department to give a list containing PRODUCT_ID, SUPPLIER_ID, and QUANTITY_ON_HAND for all the products wherein QUANTITY_ON_HAND is less than five.

Which two SQL statements can accomplish the task? (Choose two.)

- A. SELECT i.product_id, i.quantity_on_hand, pi.supplier_id FROM product_information pi JOIN inventories i ON (pi.product_id=i.product_id) WHERE quantity_on_hand < 5;
- B. SELECT product_id, quantity_on_hand, supplier_id FROM product_information NATURAL JOIN inventories AND quantity_on_hand < 5;
- C. SELECT i.product_id, i.quantity_on_hand, pi.supplier_id FROM product_information pi JOIN inventories i ON (pi.product_id=i.product_id) AND quantity_on_hand

< 5;
D. SELECT i.product_id, i.quantity_on_hand, pi.supplier_idFROM product_information pi JOINinventories iON (pi.product_id=i.product_id)USING (product_id)
AND quantity_on_hand < 5;

Answer: AC

NEW QUESTION 121

Which two statements best describe the benefits of using the WITH clause? (Choose two.)

- A. It can improve the performance of a large query by storing the result of a query block having the WITH clause in the session's temporary tablespace.
- B. It enables sessions to reuse the same query block in a SELECT statement, if it occurs more than once in a complex query.
- C. It enables sessions to store a query block permanently in memory and use it to create complex queries.
- D. It enables sessions to store the results of a query permanently.

Answer: AB

NEW QUESTION 126

Which two are the minimal requirements for a self-join? (Choose two.)

- A. Only equijoin conditions may be used in the query.
- B. Outer joins must not be used in the query.
- C. There must be a condition on which the self-join is performed.
- D. No other condition except the self-join may be specified.
- E. The table used for the self-join must have two different alias names in the query.

Answer: CE

NEW QUESTION 130

Evaluate the following SELECT statement and view the exhibit to examine its output:

```
SELECT constraint_name, constraint_type, search_condition, r_constraint_name, delete_rule, status, FROM user_constraints
WHERE table_name = 'ORDERS'; CONSTRAINT_NAME
CON SEARCH_CONDITION R_CONSTRAINT_NAME DELETE_RULE
STATUS ORDER_DATE_NN C
"ORDER_DATE" IS NOT NULL ENABLED ORDER_CUSTOMER_ID_NN C
"CUSTOMER_ID" IS NOT NULL ENABLED ORDER_MODE_LOV C
order_mode in ('direct', 'online') ENABLED
ORDER TOTAL MIN C
order total >= 0 ENABLED ORDER PK
P ENABLED
ORDERS CUSTOMER ID R
CUSTOMERS ID SET NULL ENABLED
ORDERS SALES REP R
EMP EMP ID SET NULL ENABLED
```

Which two statements are true about the output? (Choose two.)

- A. The R_CONSTRAINT_NAME column gives the alternative name for the constraint.
- B. In the second column, 'c' indicates a check constraint.
- C. The STATUS column indicates whether the table is currently in use.
- D. The column DELETE_RULE decides the state of the related rows in the child table when the corresponding row is deleted from the parent table.

Answer: BD

NEW QUESTION 133

Which two statements are true regarding multiple-row subqueries? (Choose two.)

- A. They can contain group functions.
- B. They always contain a subquery within a subquery.
- C. They use the < ALL operator to imply less than the maximum.
- D. They can be used to retrieve multiple rows from a single table only.
- E. They should not be used with the NOT IN operator in the main query if NULL is likely to be a part of the result of the subquery.

Answer: AE

NEW QUESTION 136

Examine the structure of the BOOKS_TRANSACTIONS table:

Name	Null?	Type
TRANSACTION_ID	NOT NULL	VARCHAR2 (6)
BORROWED_DATE		DATE
DUE_DATE		DATE
BOOK_ID		VARCHAR2 (6)
MEMBER_ID		VARCHAR2 (6)

You want to display the member IDs, due date, and late fee as \$2 for all transactions. Which SQL statement must you execute?

- A. SELECT member_id AS "MEMBER ID", due_date AS "DUE DATE", \$2 AS "LATE FEE" FROM BOOKS_TRANSACTIONS
- B. SELECT member_id AS "MEMBER ID", due_date AS "DUE DATE", '\$2' AS "LATE FEE" FROM BOOKS_TRANSACTIONS
- C. SELECT member_id 'MEMBER ID', due_date 'DUE DATE', '\$2 AS LATE FEE' FROM BOOKS_TRANSACTIONS;
- D. SELECT member_id AS MEMBER_ID, due_date AS DUE_DATE, \$2 AS LATE_FEE FROM BOOKS_TRANSACTIONS

Answer: B

NEW QUESTION 140

Examine the following query:

```
SQL> SELECT prod_id, amount_sold FROM sales
ORDER BY amount_sold
FETCH FIRST 5 PERCENT ROWS ONLY;
```

What is the output of this query?

- A. It displays 5 percent of the products with the highest amount sold.
- B. It displays the first 5 percent of the rows from the SALES table.
- C. It displays 5 percent of the products with the lowest amount sold.
- D. It results in an error because the ORDER BY clause should be the last clause.

Answer: C

Explanation: References:

<https://oracle-base.com/articles/12c/row-limiting-clause-for-top-n-queries-12cr1>

NEW QUESTION 144

You need to produce a report where each customer's credit limit has been incremented by \$1000. In the output, the customer's last name should have the heading Name and the incremented credit limit should be labeled New Credit Limit. The column headings should have only the first letter of each word in uppercase.

Which statement would accomplish this requirement?

- A. SELECT cust_last_name AS "Name", cust_credit_limit + 1000AS "New Credit Limit"FROM customers;
- B. SELECT cust_last_name AS Name, cust_credit_limit + 1000AS New Credit LimitFROM customers;
- C. SELECT cust_last_name AS Name, cust_credit_limit + 1000"New Credit Limit"FROM customers;
- D. SELECT INITCAP (cust_last_name) "Name", cust_credit_limit + 1000INITCAP ("NEW CREDIT LIMIT")FROM customers;

Answer: A

NEW QUESTION 149

Examine the commands used to create the DEPARTMENT_DETAILS and the COURSE-DETAILS tables: SQL> CREATE TABLE DEPARTMENT_DETAILS
DEPARTMENT_ID NUMBER PRIMARY KEY , DEPARTMENT_NAME VARCHAR2(50) ,
HOD VARCHAR2(50));

```
SQL> CREATE TABLE COURSE-DETAILS (COURSE ID NUMBER PRIMARY KEY , COURSE_NAME VARCHAR2 (50) ,
DEPARTMENT_ID NUMBER REFERENCES DEPARTMENT_DETAIL
```

You want to generate a list of all department IDs along with any course IDs that may have been assigned to them.


Which SQL statement must you use?

- A. SELECT d.department_id, c.course_id FROM course_details c LEFT OUTER JOIN department_details d ON (c.department_id=d.department_id);
- B. SELECT d.department_id,
- C. course_id FROM department_details d RIGHT OUTER JOIN course_details c ON (c.department_id=d.department_id) ;
- D. SELECT d.department_id
- E. course_id FROM department_details d RIGHT OUTER JOIN course_details c ON (d.department_id);
- F. SELECT d.department_id, c.course_id FROM department_details d LEFT OUTER JOIN course_details c ON (d.department_id)= (DEPARTMENT_ID) ;

Answer: D

NEW QUESTION 150

View the Exhibit and examine the description of the EMPLOYEES table.

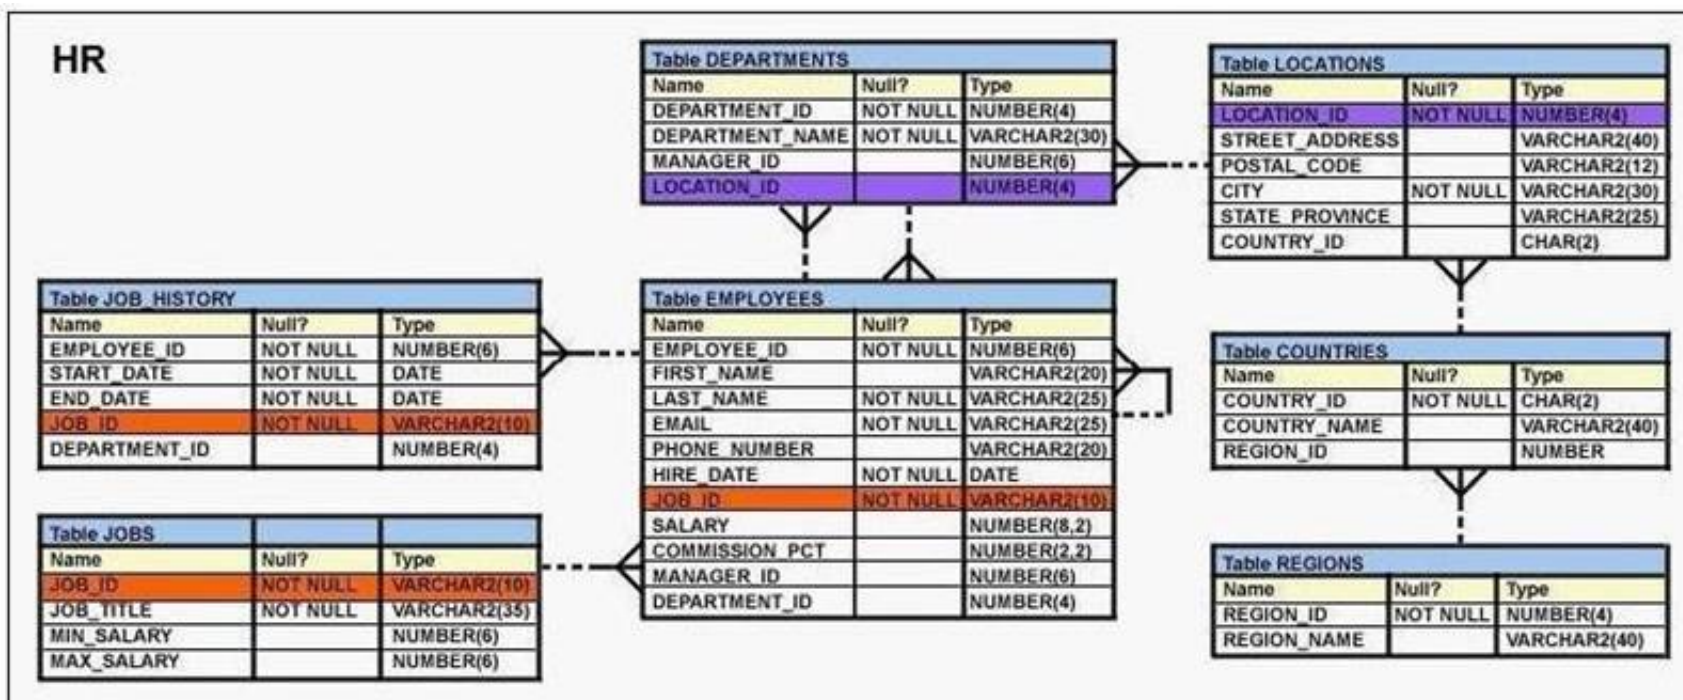

You want to calculate the total remuneration for each employee. Total remuneration is the sum of the annual salary and the percentage commission earned for a year. Only a few employees earn commission.

Which SQL statement would you execute to get the desired output?

- A. SELECT first_name, salary, salary*12+(salary*NVL2 (commission_pct, salary,salary+commission_pct))"Total"FROM EMPLOYEES;
- B. SELECT first_name, salary, salary*12+salary*commission_pct "Total"FROM EMPLOYEES;
- C. SELECT first_name, salary (salary + NVL (commission_pct, 0)*salary)*12 "Total"FROM EMPLOYEES;
- D. SELECT first_name, salary*12 + NVL(salary,0)*commission_pct, "Total"FROM EMPLOYEES;

Answer: A

NEW QUESTION 152

Sales data of a company is stored in two tables, SALES1 and SALES2, with some data being duplicated across the tables. You want to display the results from the SALES1 table, which are not present in the SALES2 table.

SALES1 table NameNullType

----- SALES_IDNUMBER STORE_IDNUMBER ITEMS_IDNUMBER QUANTITYNUMBER SALES_DATEDATE

SALES2 table NameNullType

----- SALES_IDNUMBER STORE_IDNUMBER

ITEMS_IDNUMBER QUANTITYNUMBER SALES_DATEDATE

Which set operator generates the required output?

- A. INTERSECT
- B. UNION
- C. PLUS
- D. MINUS
- E. SUBTRACT

Answer: D

Explanation: References:

https://docs.oracle.com/cd/B19306_01/server.102/b14200/queries004.htm

NEW QUESTION 157

View the Exhibit and examine the structure of the PRODUCTS table. (Choose the best answer.)

Table PRODUCTS		
Name	Null?	Type
PROD_ID	NOT NULL	NUMBER(6)
PROD_NAME	NOT NULL	VARCHAR2(50)
PROD_DESC	NOT NULL	VARCHAR2(4000)
PROD_CATEGORY	NOT NULL	VARCHAR2(50)
PROD_CATEGORY_ID	NOT NULL	NUMBER
PROD_UNIT_OF_MEASURE		VARCHAR2(20)
SUPPLIER_ID	NOT NULL	NUMBER(6)
PROD_STATUS	NOT NULL	VARCHAR2(20)
PROD_LIST_PRICE	NOT NULL	NUMBER(8,2)
PROD_MIN_PRICE	NOT NULL	NUMBER(8,2)

You must display the category with the maximum number of items.

You issue this query:

```
SQL > SELECT COUNT(*), prod_category_id FROM products
GROUP BY prod_category_id
HAVING COUNT(*) = (SELECT MAX(COUNT(*)) FROM products);
```

What is the result?

- A. It generates an error because = is not valid and should be replaced by the IN operator.
- B. It executes successfully but does not give the correct output.

- C. It executes successfully and gives the correct output.
D. It generate an error because the subquery does not have a GROUP BY clause.

Answer: D

NEW QUESTION 159

Which two statements are true regarding constraints? (Choose two.)

- A. All constraints can be defined at the column level and at the table level.
B. A constraint can be disabled even if the constraint column contains data.
C. A column with the UNIQUE constraint can contain NULLS.
D. A foreign key column cannot contain NULLS.
E. A constraint is enforced only for INSERT operations.

Answer: BC

NEW QUESTION 161

You issue the following command to drop the PRODUCTS table: (Choose all that apply.) SQL > DROP TABLE products;
Which three statements are true about the implication of this command?

- A. All data along with the table structure is deleted.
B. A pending transaction in the session is committed.
C. All indexes on the table remain but they are invalidated.
D. All views and synonyms on the table remain but they are invalidated.
E. All data in the table is deleted but the table structure remains.

Answer: ABD

NEW QUESTION 164

View the Exhibit and examine the structure of the PROMOTIONS table.

Table PROMOTIONS		
Name	Null?	Type
PROMO_ID	NOT NULL	NUMBER(6)
PROMO_NAME	NOT NULL	VARCHAR2(30)
PROMO_SUBCATEGORY	NOT NULL	VARCHAR2(30)
PROMO_SUBCATEGORY_ID	NOT NULL	NUMBER
PROMO_CATEGORY	NOT NULL	VARCHAR2(30)
PROMO_CATEGORY_ID	NOT NULL	NUMBER
PROMO_COST	NOT NULL	NUMBER(10,2)
PROMO_BEGIN_DATE	NOT NULL	DATE
PROMO_END_DATE	NOT NULL	DATE

Evaluate the following SQL statement:

```
SQL>SELECT promo_name,CASE
      WHEN promo_cost >=(SELECT AVG(promo_cost)
                        FROM promotions
                        WHERE promo_category='TV')
      THEN 'HIGH'
      ELSE 'LOW'
      END COST_REMARK
FROM promotions;
```

Which statement is true regarding the outcome of the above query?

- A. It produces an error because subqueries cannot be used with the CASE expression.
B. It shows COST_REMARK for all the promos in the promo category 'TV'.
C. It shows COST_REMARK for all the promos in the table.
D. It produces an error because the subquery gives an error.

Answer: C

NEW QUESTION 169

View the Exhibit and examine the details of PRODUCT_INFORMATION table.

PRODUCT_NAME CATEGORY_ID SUPPLIER_ID

Inkjet C/8/HQ 12

102094

Inkjet C/4 12

102090

LaserPro 600/6/BW 12

102087

LaserPro 1200/8/BW 12

102099

Inkjet B/6 12

102096

Industrial 700/ID 12

102086

Industrial 600/DQ 12

102088

Compact 400/LQ 12

102087

Compact 400/DQ 12

102088

HD 12GB /R 13

102090

HD 10GB /I 13

102071

HD 12GB @7200 /SE 13

102057

HD 18.2GB @10000 /E 13

102078

HD 18.2GB @10000 /I 13

102050

HD 18GB /SE 13

102083

HD 6GB /I 13

102072

HD 8.2GB@5400 13

102093

You have the requirement to display PRODUCT_NAME from the table where the CATEGORY_ID column has values 12 or 13, and the SUPPLIER_ID column has the value 102088. You executed the following SQL statement:

```
SELECT product_name FROM product_information
```

```
WHERE (category_id = 12 AND category_id = 13) AND supplier_id = 102088;
```

Which statement is true regarding the execution of the query?

- A. It would not execute because the same column has been used in both sides of the AND logical operator to form the condition.
- B. It would not execute because the entire WHERE clause condition is not enclosed within the parentheses.
- C. It would execute and the output would display the desired result.
- D. It would execute but the output would return no rows.

Answer: D

NEW QUESTION 172

The user SCOTT who is the owner of ORDERS and ORDER_ITEMS tables issues the following GRANT command:

```
GRANT ALL
```

```
ON orders, order_items TO PUBLIC;
```

What correction needs to be done to the above statement?

- A. PUBLIC should be replaced with specific usernames.
- B. ALL should be replaced with a list of specific privileges.
- C. WITH GRANT OPTION should be added to the statement.
- D. Separate GRANT statements are required for ORDERS and ORDER_ITEMS tables.

Answer: D

Explanation: References:

<http://docs.oracle.com/javadb/10.8.3.0/ref/rrefsqljgrant.html>

NEW QUESTION 174

In which three situations does a transaction complete?

- A. when a PL/SQL anonymous block is executed
- B. when a DELETE statement is executed
- C. when a ROLLBACK command is executed
- D. when a data definition language (DDL) statement is executed
- E. when a TRUNCATE statement is executed after the pending transaction

Answer: CDE

Explanation: References:

https://docs.oracle.com/cd/B19306_01/server.102/b14220/transact.htm

NEW QUESTION 176

Which two statements are true about sequences created in a single instance database? (Choose two.)

- A. When the MAXVALUE limit for the sequence is reached, you can increase the MAXVALUE limit by using the ALTER SEQUENCE statement.
- B. DELETE <sequencename> would remove a sequence from the database.
- C. The numbers generated by a sequence can be used only for one table.
- D. CURRVAL is used to refer to the last sequence number that has been generated.
- E. When a database instance shuts down abnormally, the sequence numbers that have been cached but not used would be available once again when the database instance is restarted.

Answer: AD

Explanation: References:

http://docs.oracle.com/cd/E11882_01/server.112/e41084/statements_2012.htm#SQLRF00817

https://docs.oracle.com/cd/A84870_01/doc/server.816/a76989/ch26.htm

NEW QUESTION 178

View the Exhibits and examine PRODUCTS and SALES tables. Exhibit 1

Table PRODUCTS		
Name	Null?	Type
PROD_ID	NOT NULL	NUMBER (6)
PROD_NAME	NOT NULL	VARCHAR2 (50)
PROD_DESC	NOT NULL	VARCHAR2 (4000)
PROD_CATEGORY	NOT NULL	VARCHAR2 (50)
PROD_CATEGORY_ID	NOT NULL	NUMBER
PROD_UNIT_OF_MEASURE		VARCHAR2 (20)
SUPPLIER_ID	NOT NULL	NUMBER (6)
PROD_STATUS	NOT NULL	VARCHAR2 (20)
PROD_LIST_PRICE	NOT NULL	NUMBER (8, 2)
PROD_MIN_PRICE	NOT NULL	NUMBER (8, 2)

Exhibit 2

Table SALES		
Name	Null?	Type
PROD_ID	NOT NULL	NUMBER
CUST_ID	NOT NULL	NUMBER
TIME_ID	NOT NULL	DATE
CHANNEL_ID	NOT NULL	NUMBER
PROMO_ID	NOT NULL	NUMBER
QUANTITY_SOLD	NOT NULL	NUMBER (10, 2)

You issue the following query to display product name the number of times the product has been sold:

```
SOL>SELECT p.prod_name, i.item_cnt
      FROM (SELECT prod_id, COUNT(*) item_cnt
            FROM sales
            GROUP BY prod_id) I RIGHT OUTER JOIN products p
      ON i.prod_id = p.prod_id;
```

What happens when the above statement is executed?

- A. The statement executes successfully and produces the required output.
- B. The statement produces an error because a subquery in the FROM clause and outer-joins cannot be used together.
- C. The statement produces an error because the GROUP BY clause cannot be used in a subquery in the FROM clause.
- D. The statement produces an error because ITEM_CNT cannot be displayed in the outer query.

Answer: A

NEW QUESTION 183

Evaluate the following statement. INSERT ALL
 WHEN order_total < 10000 THEN INTO small_orders
 WHEN order_total > 10000 AND order_total < 20000 THEN INTO medium_orders
 WHEN order_total > 20000 THEN INTO large_orders
 SELECT order_id, order_total, customer_id FROM orders;
 Which statement is true regarding the evaluation of rows returned by the subquery in the INSERT statement?

- A. Each row is evaluated by the first WHEN clause and if the condition is false then the row would be evaluated by the subsequent when clauses.
- B. All rows are evaluated by all the three WHEN clauses.
- C. Each row is evaluated by the first WHEN clause and if the condition is true, then the row would be evaluated by the subsequent when clauses.
- D. The INSERT statement will return an error because the ELSE clause is missing.

Answer: B

NEW QUESTION 187


Which statement is true about an inner join specified in the WHERE clause of a query?

- A. It must have primary-key and foreign-key constraints defined on the columns used in the join condition.
- B. It requires the column names to be the same in all tables used for the join conditions.
- C. It is applicable for equijoin and nonequijoin conditions.
- D. It is applicable for only equijoin conditions.

Answer: C

NEW QUESTION 190

View the exhibit and examine the description of the EMPLOYEES table. (Choose two.)

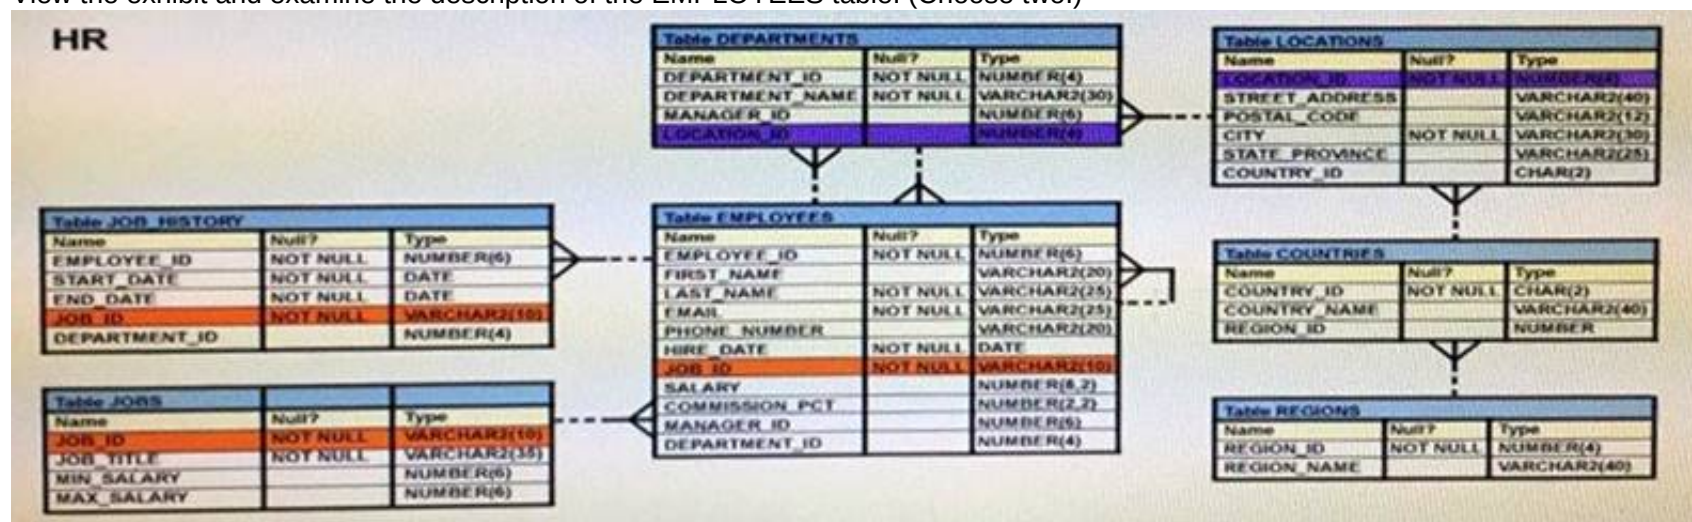

You executed this SQL statement: SELECT first_name, department_id, salary FROM employees
 ORDER BY department_id, first_name, salary desc; Which two statements are true regarding the result?

- A. The values in the SALARY column would be returned in descending order for all employees having the same value in the DEPARTMENT_ID and FIRST_NAME column.
- B. The values in the FIRST_NAME column would be returned in ascending order for all employees having the same value in the DEPARTMENT_ID column.
- C. The values in the SALARY column would be returned in descending order for all employees having the same value in the DEPARTMENT_ID column.
- D. The values in the all columns would be returned in descending order.
- E. The values in the FIRST_NAME column would be returned in descending order for all employees having the same value in the DEPARTMENT_ID column.

Answer: AB

NEW QUESTION 192

Examine these SQL statements that are executed in the given order:
 CREATE TABLE emp
 (emp_no NUMBER (2) CONSTRAINT emp_emp_no_pk PRIMARY KEY, ename VARCHAR 2 (15),
 salary NUMBER (8, 2),
 mgr_no NUMBER(2) CONSTRAINT emp_mgr_fk REFERENCES emp (emp_no)); ALTER TABLE emp
 DISABLE CONSTRAINT emp_emp_no_pk CASCADE; ALTER TABLE emp
 ENABLE CONSTRAINT emp_emp_no_pk;
 What will be the status of the foreign key EMP_MGR_FK?

- A. It will be enabled and immediate.
- B. It will be enabled and deferred.
- C. It will remain disabled and can be re-enabled manually.
- D. It will remain disabled and can be enabled only by dropping the foreign key constraint and re-creating it.

Answer: C

NEW QUESTION 196

Examine the structure of the SALES table. (Choose two.)

NAME	NULL?	TYPE
PRODUCT_ID	NOT NULL	NUMBER(10)
CUSTOMER_ID	NOT NULL	VARCHAR2(10)
TIME_ID	NOT NULL	DATE
CHANNEL_ID	NOT NULL	NUMBER(5)
PROMO_ID	NOT NULL	NUMBER(5)
QUANTITY_SOLD	NOT NULL	NUMBER(10, 2)
PRICE		NUMBER(10, 2)
AMOUNT_SOLD	NOT NULL	NUMBER(10, 2)

Examine this statement:

```
SQL > CREATE TABLE sales1 (prod_id, cust_id, quantity_sold, price) AS
SELECT product_id, customer_id, quantity_sold, price FROM sales
WHERE 1 = 2;
```

Which two statements are true about the SALES1 table?

- A. It will not be created because the column-specified names in the SELECT and CREATE TABLE clauses do not match.
- B. It will have NOT NULL constraints on the selected columns which had those constraints in the SALES table.
- C. It will not be created because of the invalid WHERE clause.
- D. It is created with no rows.
- E. It has PRIMARY KEY and UNIQUE constraints on the selected columns which had those constraints in the SALES table.

Answer: BD

NEW QUESTION 200

View the Exhibit and examine the structure of the ORDER_ITEMS table. (Choose the best answer.)

ORDER_ITEMS				
ORDER_ID	LINE_ITEM_ID	PRODUCT_ID	UNIT_PRICE	QUANTITY
2355	4	2322	19	188
2355	5	2323	17	190
2355	9	2359	226.6	204
2355	1	2289	46	200
2356	5	2308	58	47
2356	6	2311	95	51
2356	1	2264	199.1	38
2356	2	2274	148.5	34
2356	3	2293	98	40
2356	4	2299	72	44
2357	2	2245	462	26
2357	3	2252	788.7	26
2357	4	2257	371.8	29
2357	5	2262	95	29

You must select the ORDER_ID of the order that has the highest total value among all the orders in the ORDER_ITEMS table. Which query would produce the desired result?

- A. SELECT order_id FROM order_items GROUP BY order_id HAVING SUM(unit_price*quantity) = (SELECT MAX (SUM(unit_price*quantity)) FROM order_items GROUP BY order_id);
- B. SELECT order_id FROM order_items WHERE (unit_price*quantity) = (SELECT MAX (SUM(unit_price*quantity)) FROM order_items) GROUP BY order_id;
- C. SELECT order_id FROM order_items WHERE (unit_price*quantity) = MAX(unit_price*quantity) GROUP BY order_id;
- D. SELECT order_id FROM order_items WHERE (unit_price*quantity) = (SELECT MAX(unit_price*quantity) FROM order_items GROUP BY order_id)

Answer: A

NEW QUESTION 201

Examine the commands used to create DEPARTMENT_DETAILS and COURSE_DETAILS tables:

```
SQL>CREATE TABLE DEPARTMENT_DETAILS
(DEPARTMENT_ID NUMBER PRIMARY KEY,
DEPARTMENT_NAME VARCHAR2(50),
HOD VARCHAR2(50));

SQL>CREATE TABLE COURSE_DETAILS
(COURSE_ID NUMBER PRIMARY KEY,
COURSE_NAME VARCHAR2(50),
DEPARTMENT_ID NUMBER REFERENCES DEPARTMENT_DETAILS (DEPARTMENT_ID));
```

You want to generate a list of all department IDs that do not exist in the COURSE_DETAILS table. You execute the SQL statement:

```
SQL> SELECT d.department_id FROM course_details c INNER JOIN
department_details d ON c.department_id<>d.department_id;
```

What is the outcome?

- A. It fails because the join type used is incorrect.
- B. It executes successfully and displays the required list.
- C. It executes successfully but displays an incorrect list.
- D. It fails because the ON clause condition is not valid.

Answer: B

NEW QUESTION 206

View the Exhibit and examine the data in the PRODUCT_INFORMATION table.

PRODUCT_INFORMATION				
PDT_ID	SUP_ID	PDT_STATUS	LIST_PRICE	MIN_PRICE
1797	102094	orderable	349	288
2254	102071	obsolete	453	371
2382	102050	under development	850	731
2459	102099	under development	699	568
3127	102087	orderable	498	444
3353	102071	obsolete	489	413
3354	102066	orderable	543	478

Which two tasks would require subqueries? (Choose two.)

- A. displaying all the products whose minimum list prices are more than average list price of products having the status orderable
- B. displaying the total number of products supplied by supplier 102071 and having product status OBSOLETE
- C. displaying the number of products whose list prices are more than the average list price
- D. displaying all supplier IDs whose average list price is more than 500
- E. displaying the minimum list price for each product status

Answer: AC

NEW QUESTION 208

Evaluate the following CREATE TABLE command:

```
CREATE TABLE order_item
(order_id NUMBER(3),
item_id NUMBER(2),
qty NUMBER(4),
CONSTRAINT ord_itm_id_pk
PRIMARY KEY (order_id, item_id)
USING INDEX
(CREATE INDEX ord_itm_idx
ON order_item (order_id, item_id)));
```

Which statement is true regarding the above SQL statement?


- A. It would execute successfully and only ORD_ITM_IDX index would be created.
- B. It would give an error because the USING INDEX clause cannot be used on a composite primary.
- C. It would execute successfully and two indexes ORD_ITM_IDX and ORD_ITM_ID PK would be created.
- D. It would give an error because the USING INDEX is not permitted in the CREATE TABLE command.

Answer: A

NEW QUESTION 210

View the Exhibit and examine the structure of the EMPLOYEES table.

You want to display all employees and their managers having 100 as the MANAGER_ID. You want the output in two columns: the first column would have the LAST_NAME of the managers and the second column would have LAST_NAME of the employees.

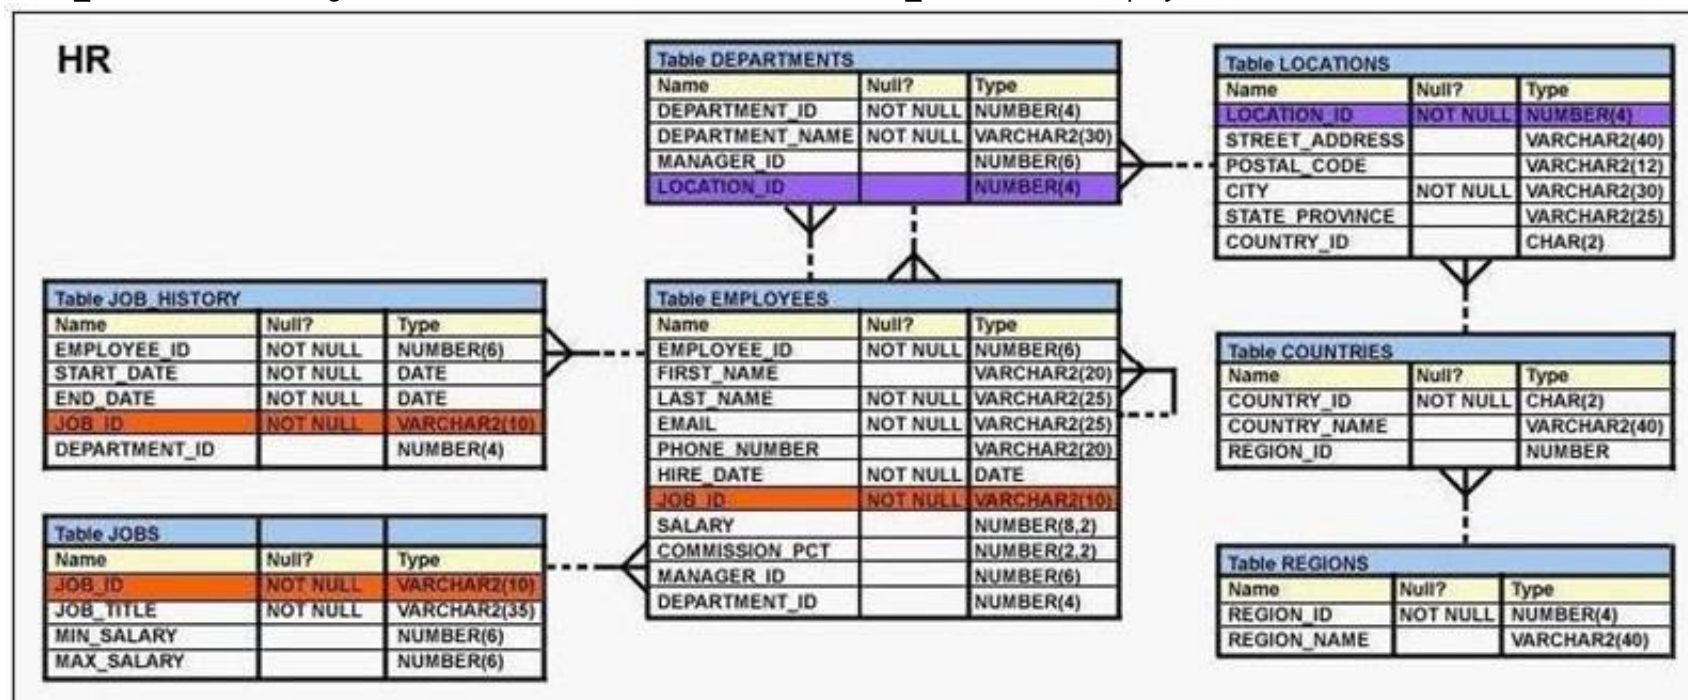

Which SQL statement would you execute?

- A. SELECT m.last_name "Manager", e.last_name "Employee" FROM employees m JOIN employees e ON m.employee_id = e.manager_id WHERE m.manager_id=100;
- B. SELECT m.last_name "Manager", e.last_name "Employee" FROM employees m JOIN employees e ON m.employee_id = e.manager_id WHERE e.manager_id=100;
- C. SELECT m.last_name "Manager", e.last_name "Employee" FROM employees m JOIN employees e ON e.employee_id = m.manager_id WHERE m.manager_id=100;
- D. SELECT m.last_name "Manager", e.last_name "Employee" FROM employees m JOIN employees e WHERE m.employee_id = e.manager_id AND e.manager_id=100;

Answer: B

NEW QUESTION 213

Examine the structure of the CUSTOMERS table: (Choose two.)

NAME	NULL?	TYPE
CUSTNO	NOT NULL	NUMBER(3)
CUSTNAME	NOT NULL	VARCHAR2(25)
CUSTADDRESS		VARCHAR2(35)
CUST_CREDIT_LIMIT		NUMBER(5)

CUSTNO is the PRIMARY KEY.

You must determine if any customers' details have been entered more than once using a different CUSTNO, by listing all duplicate names.

Which two methods can you use to get the required result?

- A. Subquery
- B. Self-join
- C. Full outer-join with self-join
- D. Left outer-join with self-join
- E. Right outer-join with self-join

Answer: AB

NEW QUESTION 215

Evaluate the following query:

```
SELECT INTERVAL '300' MONTH,
INTERVAL '54-2' YEAR TO MONTH,
INTERVAL '11:12:10.1234567' HOUR TO SECOND
FROM dual;
```

Which is the correct output of the above query?

- A. +00-300, +54-02, +00 11:12:10.123457
- B. +00-300, +00-650, +00 11:12:10.123457
- C. +25-00, +54-02, +00 11:12:10.123457
- D. +25-00, +00-650, +00 11:12:10.123457

Answer: C

NEW QUESTION 216

See the Exhibit and examine the structure of the PROMOTIONS table:

Table PROMOTIONS		
Name	Null?	Type
PROMO_ID	NOT NULL	NUMBER(6)
PROMO_NAME	NOT NULL	VARCHAR2(30)
PROMO_SUBCATEGORY	NOT NULL	VARCHAR2(30)
PROMO_SUBCATEGORY_ID	NOT NULL	NUMBER
PROMO_CATEGORY	NOT NULL	VARCHAR2(30)
PROMO_CATEGORY_ID	NOT NULL	NUMBER
PROMO_COST	NOT NULL	NUMBER(10,2)
PROMO_BEGIN_DATE	NOT NULL	DATE
PROMO_END_DATE	NOT NULL	DATE

Using the PROMOTIONS table,
you need to find out the average cost for all promos in the range \$0-2000 and \$2000-5000 in category A.
You issue the following SQL statements:

```
SQL>SELECT AVG(CASE
                WHEN promo_cost BETWEEN 0 AND 2000 AND promo_category='A'
                THEN promo_cost
                ELSE null END) "CAT_2000A",
        AVG(CASE
                WHEN promo_cost BETWEEN 2001 AND 5000 AND promo_category='A'
                THEN promo_cost
                ELSE null END) "CAT_5000A"
FROM promotions;
```

What would be the outcome?

- A. It generates an error because multiple conditions cannot be specified for the WHEN clause.
- B. It executes successfully and gives the required result.
- C. It generates an error because CASE cannot be used with group functions.
- D. It generates an error because NULL cannot be specified as a return value.

Answer: B

Explanation: CASE Expression

Facilitates conditional inquiries by doing the work of an IF-THEN-ELSE statement:

```
CASE expr WHEN comparison_expr1 THEN return_expr1 [WHEN comparison_expr2 THEN return_expr2
WHEN comparison_exprn THEN return_exprn ELSE else_expr]
END
```

NEW QUESTION 218

The BOOKS_TRANSACTIONS table exists in your database. SQL>SELECT * FROM books_transactions ORDER BY 3; What is the outcome on execution?

- A. The execution fails unless the numeral 3 in the ORDER BY clause is replaced by a column name.
- B. Rows are displayed in the order that they are stored in the table only for the three rows with the lowest values in the key column.
- C. Rows are displayed in the order that they are stored in the table only for the first three rows.
- D. Rows are displayed sorted in ascending order of the values in the third column in the table.

Answer: D

NEW QUESTION 222

Which statement is true about Data Manipulation Language (DML)?

- A. DML automatically disables foreign key constraints when modifying primary key values in the parent table.
- B. Each DML statement forms a transaction by default.
- C. A transaction can consist of one or more DML statements.
- D. DML disables foreign key constraints when deleting primary key values in the parent table, only when the ON DELETE CASCADE option is set for the foreign key constraint.

Answer: C

NEW QUESTION 225

Which statement is true regarding external tables?

- A. The CREATE TABLE AS SELECT statement can be used to upload data into regular table in the database from an external table.

- B. The data and metadata for an external table are stored outside the database.
 C. The default REJECT LIMIT for external tables is UNLIMITED.
 D. ORACLE_LOADER and ORACLE_DATAPUMP have exactly the same functionality when used with an external table.


Answer: A

Explanation: References:

https://docs.oracle.com/cd/B28359_01/server.111/b28310/tables013.htm

NEW QUESTION 226

View the Exhibit and examine the structure of ORDERS and CUSTOMERS tables. (Choose the best answer.)

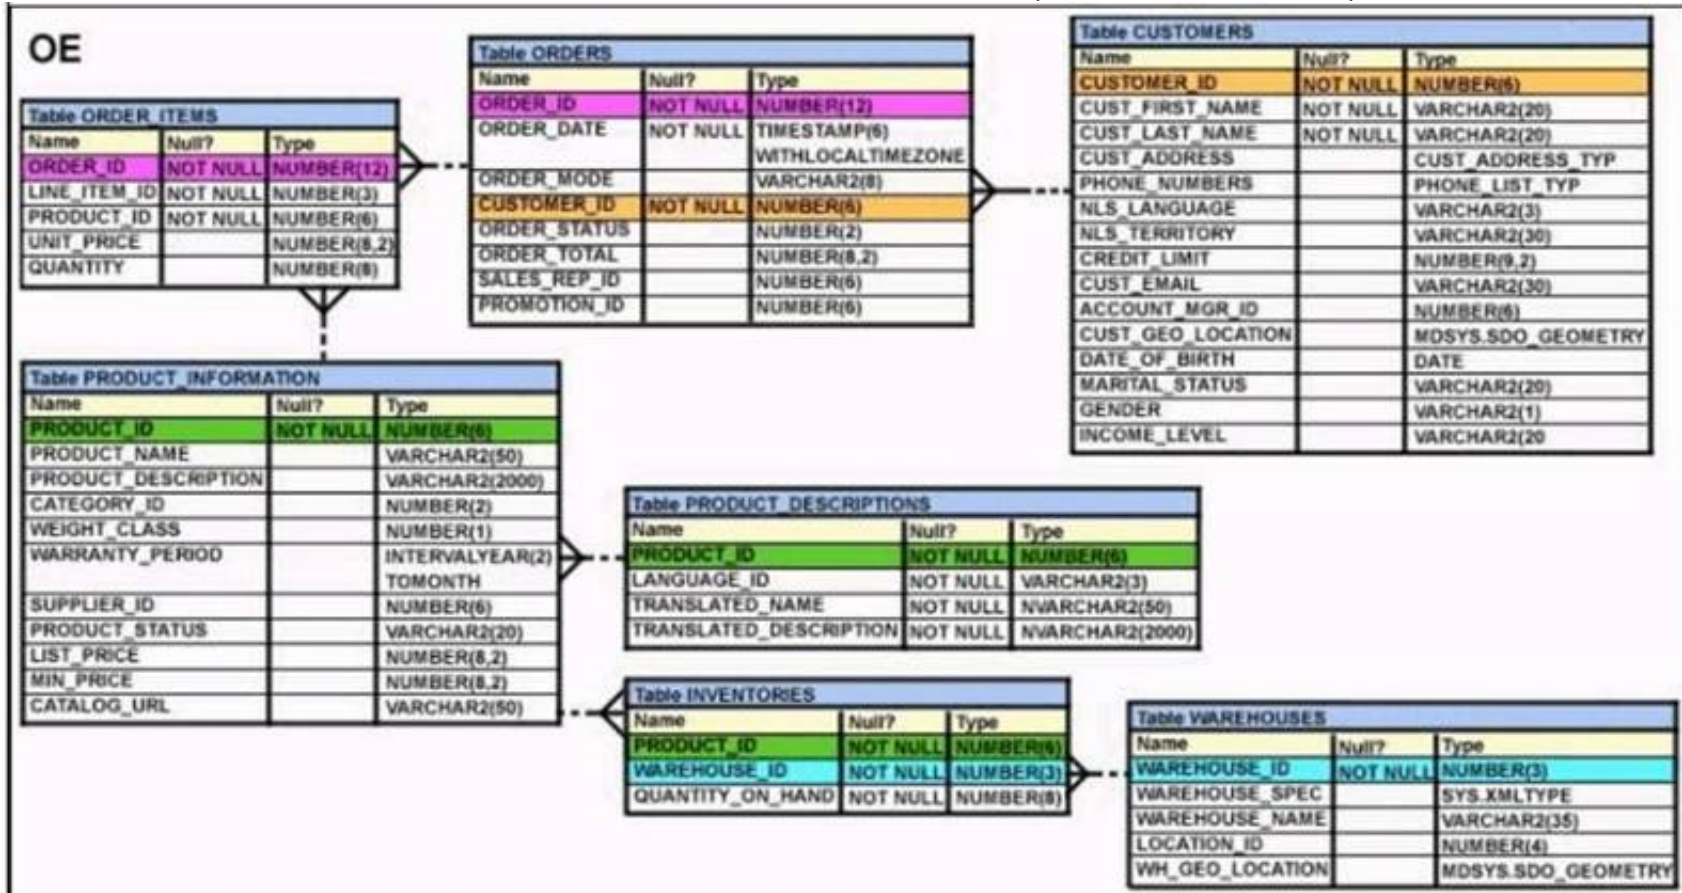

You executed this UPDATE statement: UPDATE
 (SELECT order_date, order_total, customer_id FROM orders) Set order_date = '22-mar-2007'
 WHERE customer_id IN
 (SELECT customer_id FROM customers
 WHERE cust_last_name = 'Roberts' AND credit_limit = 600); Which statement is true regarding the execution?

- A. It would not execute because a subquery cannot be used in the WHERE clause of an UPDATE statement.
 B. It would not execute because two tables cannot be referenced in a single UPDATE statement.
 C. It would execute and restrict modifications to the columns specified in the SELECT statement.
 D. It would not execute because a SELECT statement cannot be used in place of a table name.

Answer: C

NEW QUESTION 228

You notice a performance change in your production Oracle 12c database. You want to know which change caused this performance difference. Which method or feature should you use?

- A. Compare Period ADDM report.
 B. AWR Compare Period report.
 C. Active Session History (ASH) report.
 D. Taking a new snapshot and comparing it with a preserved snapshot.

Answer: B

NEW QUESTION 229

Examine the structure of the MEMBERS table: NameNull?Type

----- MEMBER_IDNOT NULLVARCHAR2 (6)

FIRST_NAMEVARCHAR2 (50)

LAST_NAMENOT NULLVARCHAR2 (50)

ADDRESSVARCHAR2 (50)

You execute the SQL statement:

SQL > SELECT member_id, ' ', first_name, ' ', last_name "ID FIRSTNAME LASTNAME " FROM members;

What is the outcome?

- A. It fails because the alias name specified after the column names is invalid.
 B. It fails because the space specified in single quotation marks after the first two column names is invalid.
 C. It executes successfully and displays the column details in a single column with only the alias column heading.
 D. It executes successfully and displays the column details in three separate columns and replaces only the last column heading with the alias.

Answer: D

NEW QUESTION 234

Which three statements are true regarding the WHERE and HAVING clauses in a SQL statement? (Choose three.)

- A. WHERE and HAVING clauses cannot be used together in a SQL statement.
- B. The HAVING clause conditions can have aggregate functions.
- C. The HAVING clause conditions can use aliases for the columns.
- D. The WHERE clause is used to exclude rows before the grouping of data.
- E. The HAVING clause is used to exclude one or more aggregated results after grouping data.

Answer: ABD

NEW QUESTION 238

You issued this command:

CHOOSE THREE


SQL > DROP TABLE employees; Which three statements are true?

- A. Sequences used in the EMPLOYEES table become invalid.
- B. If there is an uncommitted transaction in the session, it is committed.
- C. All indexes and constraints defined on the table being dropped are also dropped.
- D. The space used by the EMPLOYEES table is always reclaimed immediately.
- E. The EMPLOYEES table can be recovered using the ROLLBACK command.
- F. The EMPLOYEES table may be moved to the recycle bin.

Answer: BCF

NEW QUESTION 241

View the Exhibit and examine the structure of the ORDERS table. (Choose the best answer.)

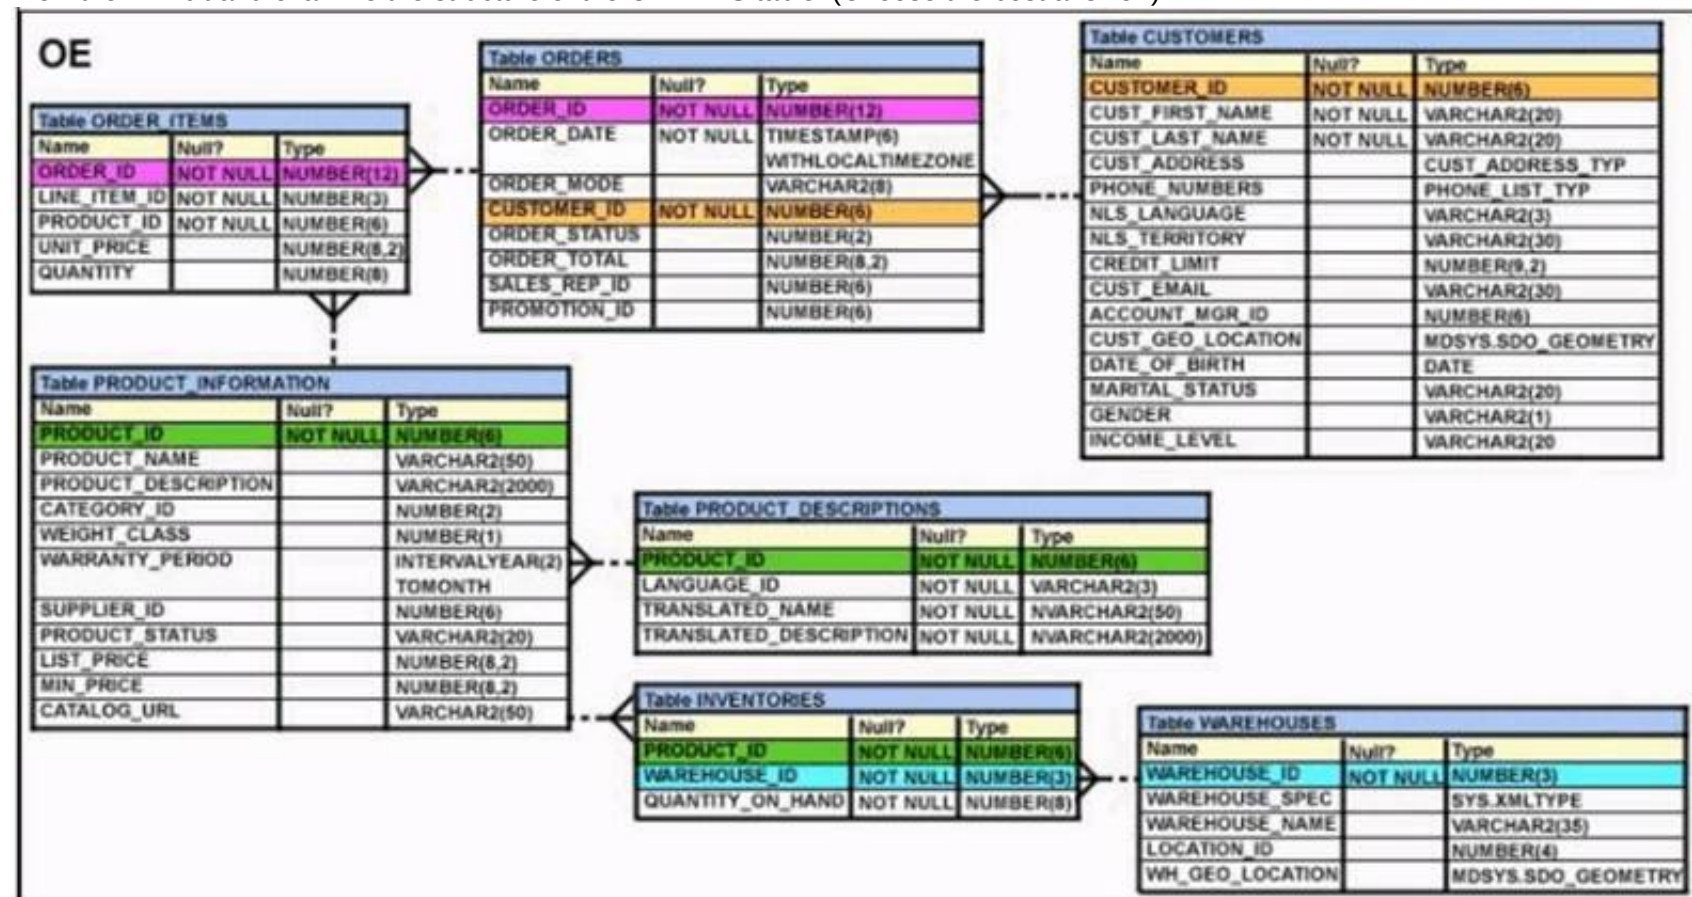

You must select ORDER_ID and ORDER_DATE for all orders that were placed after the last order placed by CUSTOMER_ID 101.

Which query would give you the desired result?

- A. SELECT order_id, order_date FROM orders WHERE order_date > ANY(SELECT order_date FROM orders WHERE customer_id = 101);
- B. SELECT order_id, order_date FROM orders WHERE order_date > ALL(SELECT MAX(order_date) FROM orders) AND customer_id = 101;
- C. SELECT order_id, order_date FROM orders WHERE order_date > ALL(SELECT order_date FROM orders WHERE customer_id = 101);
- D. SELECT order_id, order_date FROM orders WHERE order_date > IN(SELECT order_date FROM orders WHERE customer_id = 101);

Answer: C

NEW QUESTION 242

Examine the structure of the INVOICE table. Name Null? Type

----- INV_NO NOT NULL NUMBER(3) INV_DATE DATE INV_AMT NUMBER(10,2)

Which two SQL statements would execute successfully?

- A. SELECT inv_no, NVL2(inv_date, 'Pending', 'Incomplete') FROM invoice;
- B. SELECT inv_no, NVL2(inv_amt, inv_date, 'Not Available') FROM invoice;
- C. SELECT inv_no, NVL2(inv_date, sysdate - inv_date, sysdate) FROM invoice;
- D. SELECT inv_no, NVL2(inv_amt, inv_amt * .25, 'Not Available') FROM invoice;

Answer: AC

NEW QUESTION 245

Which two statements are true regarding the execution of the correlated subqueries? (Choose two.)

- A. The nested query executes after the outer query returns the row.

- B. The nested query executes first and then the outer query executes.
- C. The outer query executes only once for the result returned by the inner query.
- D. Each row returned by the outer query is evaluated for the results returned by the inner query.

Answer: AD

NEW QUESTION 249

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

1Z0-071 Practice Exam Features:

- * 1Z0-071 Questions and Answers Updated Frequently
- * 1Z0-071 Practice Questions Verified by Expert Senior Certified Staff
- * 1Z0-071 Most Realistic Questions that Guarantee you a Pass on Your First Try
- * 1Z0-071 Practice Test Questions in Multiple Choice Formats and Updates for 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 1Z0-071 Practice Test Here](#)