

JN0-104 Dumps

Junos - Associate (JNCIA-Junos)

<https://www.certleader.com/JN0-104-dumps.html>



NEW QUESTION 1

- (Exam Topic 1)

Which command allows you to execute operational mode commands while in configuration mode?

- A. activate
- B. show
- C. run
- D. set

Answer: C

NEW QUESTION 2

- (Exam Topic 1)

Which statement is true about a virtual router routing instance?

- A. It can be used for Layer 3 VPN implementations.
- B. It can be used to create a separate routing table.
- C. An interface in the routing instance can also reside in the default routing instance.
- D. It automatically has import and export policies applied.

Answer: B

NEW QUESTION 3

- (Exam Topic 1)

What are two benefits of class of service (CoS)? (Choose two.)

- A. CoS can increase the performance of a slow network.
- B. CoS can manage traffic congestion
- C. CoS can prioritize latency-sensitive traffic
- D. CoS can increase network bandwidth.

Answer: BC

NEW QUESTION 4

- (Exam Topic 1)

You just received a new factory-default Junos device.

Which two steps must be completed to connect and log in to the device? (Choose two.)


- A. Connect to the device using an SSH connection.
- B. Log in with the user root and no password.
- C. Connect to the device using the console connection.
- D. Log in with the user root and password of root123.

Answer: BC

NEW QUESTION 5

- (Exam Topic 1)

Click the Exhibit button

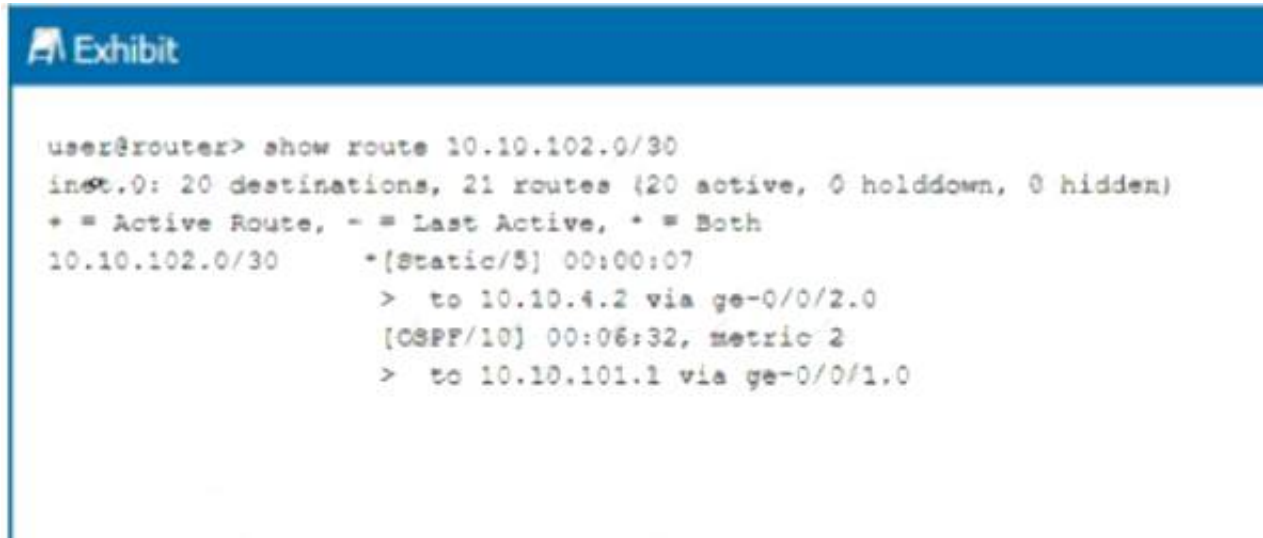

```
user@router> show route 10.10.102.0/30
inet.0: 20 destinations, 21 routes (20 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
10.10.102.0/30      *{Static/5} 00:00:07
                    > to 10.10.4.2 via ge-0/0/2.0
                    [OSPF/10] 00:06:32, metric 2
                    > to 10.10.101.1 via ge-0/0/1.0
```

Referring to the exhibit, which statement is correct?

- A. Traffic destined to 10.10.102.0/30 will be forwarded to 10.10.101.1.
- B. Traffic destined to 10.10.102.0/30 will be load-balanced across both next hops.
- C. Traffic destined to 10.10.102.0/30 will be silently dropped.
- D. Traffic destined to 10.10.102.0/30 will be forwarded to 10.10.4.2

Answer: D

NEW QUESTION 6

- (Exam Topic 1)

Which statement about the show chassis hardware Command is correct?

- A. The command provides a list of installed hardware components, including serial numbers and model numbers.
- B. The command provides a list of all current hardware utilization statistics and operational status
- C. The command provides 2 list of supported hardware components and their current operating status
- D. The command provides a list of supported hardware components and environmental thresholds.

Answer: A

NEW QUESTION 7

- (Exam Topic 1)

Which statement is true about using custom login class permissions?

- A. If you allow and deny the same command, the command is allowed_
- B. If you allow and deny the same command, the command is denied.
- C. If you allow and deny the same command, Junos OS will randomly choose the action
- D. If you allow and deny the same command, the Junos OS will fail the commit check.

Answer: B

NEW QUESTION 8

- (Exam Topic 1)

You want to temporarily apply a candidate configuration to the active configuration and automatically roll back after 10 minutes

In this scenario, which command will accomplish this task?

- A. commit at
- B. commit confirmed
- C. commit check
- D. commit

Answer: B

Explanation:

[edit]

user@host# commit confirmed

commit confirmed will be automatically rolled back in 10 minutes unless confirmed commit complete

#commit confirmed will be rolled back in 10 minutes [edit]

user@host#

<https://www.juniper.net/documentation/us/en/software/junos/cli/topics/topic-map/junos-configuration-commit.ht>

NEW QUESTION 9

- (Exam Topic 1)

Click the Exhibit button.



```
[edit policy-options]
user@router# show
prefix-list rfc1918 {
    10.0.0.0/8;
    172.16.0.0/12;
    192.168.0.0/16;
}
policy-statement BGP-import-policy {
    term term-1 {
        from {
            route-filter 172.16.0.0/12 orlonger;
            route-filter 10.10.0.0/16 orlonger;
        }
        then accept;
    }
    term term-2 {
        from {
            prefix-list-filter rfc1918 orlonger reject;
        }
    }
}
```

You have applied the policy shown in the exhibit as an import policy to your BGP group In this scenario, what will happen when the router receives the 192.168.30.48/32 route?

- A. It will be sent to the default BGP policy
- B. It will match term-1 and be accepted.
- C. It will match term-2 and be accepted
- D. It will match term-2 and be rejected.

Answer: D

NEW QUESTION 10

- (Exam Topic 1)

What information is provided by the show route forwarding-table command?

- A. the routing table stored on the RE
- B. the protocol from where the route was learned
- C. the outgoing interface(s) associated with the destination prefixes
- D. the number of routes that are active, hidden, or in a hold-down state

Answer: C

NEW QUESTION 10

- (Exam Topic 1)

A user entered configuration mode and modified the candidate configuration. In this scenario, what are two results? (Choose two.)

- A. Other users cannot enter configuration mode.
- B. Other users cannot enter configuration mode using the exclusive parameter
- C. Other users cannot log into the device.
- D. Other users cannot enter configuration mode using the private parameter.

Answer: BD

NEW QUESTION 12

- (Exam Topic 1)

Which two statements describe firewall filters? (Choose two.)

- A. Firewall filters are applied to interfaces.
- B. Firewall filters are applied to security policies
- C. Firewall filters provide stateless security.
- D. Firewall filters provide stateful security.

Answer: AC

NEW QUESTION 17

- (Exam Topic 1)

Which address correctly represents a valid abbreviation for the 2bfc:0000:0000:0000:0217:0000:fe8c:5c85/128 IPv6 address?

- A. 2bfe::217:0:fe8c:5c85/128
- B. 2bfe:0:217:-fe8c:5c85/128
- C. 2bfe::0217::fe8e:5e85/128
- D. 2bfe:0:217:0:fe8e:5c85/128

Answer: A

NEW QUESTION 19

- (Exam Topic 1)

You must recover a device by loading the rescue configuration file. In this scenario, which command will accomplish this task?

- A. {master:0}user@router> load override rescue
- B. {master:0}user@router> rollback rescue
- C. {master:0} [edit]user@router> load override rescue
- D. {master:0} [edit]user@router# rollback rescue

Answer: B

NEW QUESTION 20

- (Exam Topic 1)

What are two functions of the PFE? (Choose two.)

- A. to maintain the forwarding tables
- B. to apply the class of service function
- C. to forward transit traffic
- D. to monitor the chassis

Answer: AC

NEW QUESTION 22

- (Exam Topic 1)

Which operational mode command will provide real-time usage statistics for the ge-0/0/0 interface?

- A. show interfaces ge-0/0/0 extensive
- B. monitor interface traffic
- C. show interfaces statistics
- D. monitor traffic interface ge-0/0/0

Answer: B

NEW QUESTION 25

- (Exam Topic 1)

Which step is required when performing a Junos software upgrade?

- A. You must create a user account named maintenance-user.
- B. You must reboot the device
- C. You must load the factory default configuration
- D. You must zeroize the device.

Answer: B

NEW QUESTION 28

- (Exam Topic 1)

What are two important steps when upgrading an SRX300 Series device? (Choose two.)

- A. Verify that enough space exists to upload the software package.
- B. Clear all alarms.
- C. Reboot the device.
- D. Verify that the NETCONF protocol is enabled.

Answer: AC

NEW QUESTION 31

- (Exam Topic 1)

Which two parameters are considered action modifiers in the firewall filters then statement? (Choose two.)

- A. next term
- B. reject
- C. policer
- D. counter

Answer: AB

NEW QUESTION 36

- (Exam Topic 1)

You are asked to configure a Junos device to perform regular configuration backups

Which feature will you configure under the [edit system] hierarchy to accomplish this task?

- A. archival
- B. backup-router
- C. syslog
- D. tracing

Answer: B

NEW QUESTION 38

- (Exam Topic 2)

Your firewall filters are not in the correct order, what would solve this problem?

- A. Use the next-term action to force an evaluation of the next-term
- B. Use the commit parameter to ensure that terms are evaluated correctly
- C. Use the reject action to change the action of the filter
- D. Use the filter command to reorder the terms with the filter

Answer: D

NEW QUESTION 40

- (Exam Topic 2)

A packet enters a Junos device. No matching destination entry exists in the forwarding table. How will the device respond?

- A. The RE responds to the source with a destination unreachable notification message
- B. The PFE responds to the destination with a source unreachable notification message
- C. The PFE responds to the source with a destination unreachable notification message
- D. The RE responds to the destination with a source unreachable notification message

Answer: B

NEW QUESTION 44

- (Exam Topic 2)

Which command is used to load the rescue configuration?

- A. load merge rescue
- B. rollback rescue
- C. rollback 0
- D. load replace rescue

Answer: B

NEW QUESTION 45

- (Exam Topic 2)

Which two statements are correct about the request system zeroize local command? (Choose two.)

- A. The command preserves the management interface addresses.
- B. The command resets all key values.
- C. The command removes all data files.
- D. The command removes all user-created files from the system.

Answer: BD

NEW QUESTION 49

- (Exam Topic 2)

How would you change the display so the display so that 40 lines will be displayed in the terminal program when you are logged into a Junos device?

- A. Issue the set cli screen-length 40 command from configuration mode.
- B. Set the display options in your terminal program.
- C. Issue the set cli screen-length 40 command from operational mode.
- D. Set the windows size of your terminal program.

Answer: C

NEW QUESTION 52

- (Exam Topic 2)

What is the network ID address of the IPv4 subnet that includes the IP address 114.180.192.120/28?


- A. 114.180.192.118/28
- B. 114.180.192.100/28
- C. 114.180.192.112/28
- D. 114.180.192.106/28

Answer: C

NEW QUESTION 53

- (Exam Topic 2)

Exhibit:

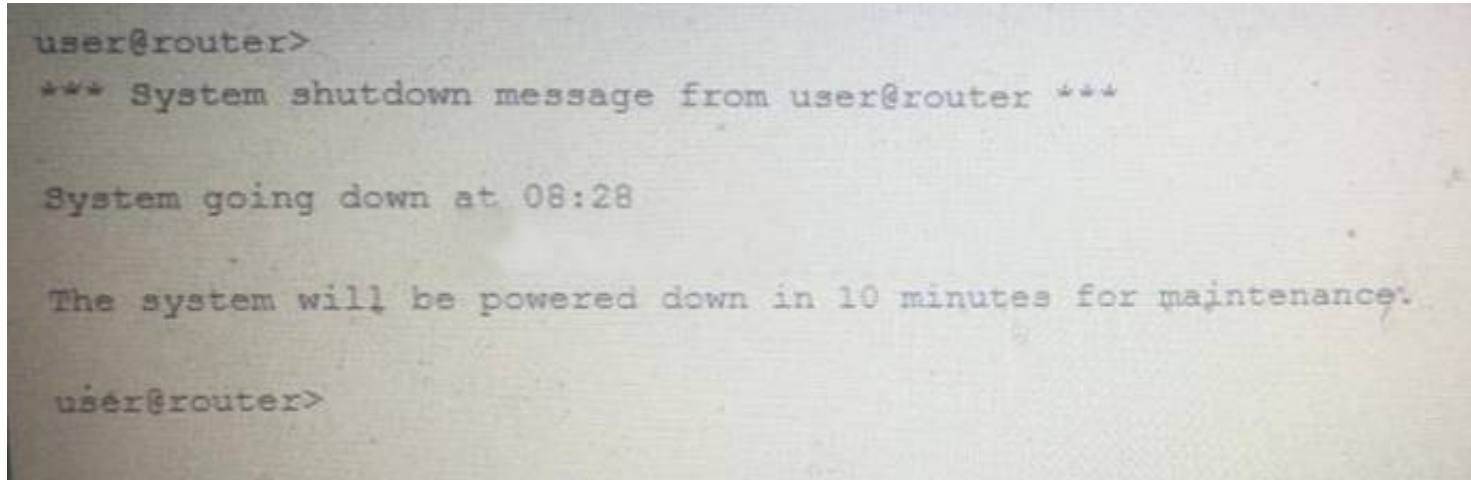

```
user@router>
*** System shutdown message from user@router ***

System going down at 08:28

The system will be powered down in 10 minutes for maintenance.

user@router>
```

While working on a Junos Device, you receive the message shown. In this scenario, what would you do to stop the shutdown process?

- A. Issue the clear system commit command
- B. Issue the clear system reboot command
- C. Issue the request system halt in command
- D. Issue the request system power-off in command

Answer: B

NEW QUESTION 55

- (Exam Topic 2)

Which keystrokes are used to auto-complete user-defined variables?

- A. Spacebar
- B. Home
- C. End
- D. Tab CC

Answer: D

NEW QUESTION 58

- (Exam Topic 2)

Which word starts a command to display the operational status of a Junos device?

- A. put
- B. set
- C. show
- D. get

Answer: C

NEW QUESTION 61

- (Exam Topic 2)

What is the default location of the syslog file on Junos devices?

- A. /var/log/
- B. /var/tmp/
- C. /var/home/
- D. /var/db/

Answer: A

NEW QUESTION 63

- (Exam Topic 2)

You are considering to upgrade from 19.1R1 and want to ensure that only bug fixes are included. Which two software versions should you use in the current situation? Choose Two

- A. 19.3R2
- B. 19.1R3
- C. 19.1R1-S2
- D. 19.3R1-S1

Answer: BC

Explanation:

R release : Maintenance and introduce bug fixes

* 19.1R1 ==> 19.1R2 introduces only bug fixes 19.1R1 ==> 19.2R2 Introduces new features

NEW QUESTION 65

- (Exam Topic 2)

In which directory the traceoption files stored by default?

- A. /var/db/
- B. /var/tmp/
- C. /var/log/
- D. /var/home/

Answer: C

NEW QUESTION 66

- (Exam Topic 2)

Referring to the exhibit.

```
[edit system ntp]
user@router# show
server 172.25.11.254;
```

which action would synchronize a new router's clock with the NTP Server? Or

Which action would synchronize the local router's clock with the NTP server?

- A. Reboot the router.
- B. Configure the NTP server using the set server 172.25.11.254 configuration command under the [edit system ntp] hierarchy.
- C. Configure the correct NTP trusted key using the set trusted-key <key-value> configuration command under the [edit system ntp] hierarchy.
- D. Issue the set date ntp operational

Answer: D

NEW QUESTION 68

- (Exam Topic 2)

Which CIDR notation is the equivalent of the subnet mask of 255.255.192.0?

- A. /19
- B. /18
- C. /20
- D. /17

Answer: B

NEW QUESTION 69

- (Exam Topic 2)

What are three acceptable modifiers to a terminating action on a firewall filter? (Choose three.)

- A. policer
- B. count
- C. log
- D. discard
- E. syslog

Answer: BCE

NEW QUESTION 70

- (Exam Topic 2)

You have configuration groups applied on your router.

Which command would you use to see all components of the interface hierarchy?

- A. show configuration interfaces | display detail
- B. show configuration interfaces | display changed
- C. show configuration interfaces | display set
- D. show configuration interfaces | display inheritance

Answer: D

NEW QUESTION 75

- (Exam Topic 2)

Host A is communicating with Host B through a Layer 2 switch.

What is the highest layer that the switch will inspect the traffic in this scenario?

- A. Data Link
- B. Transport
- C. Network
- D. Session

Answer: A

NEW QUESTION 79

- (Exam Topic 2)

Exhibit:

```
user@router> show route
inet.0: 5 destinations, 5 routes (5 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
10.210.0.0/16      *[Static/5] 1w0d 20:17:39
                   > to 172.25.11.254 via fxp0.0
172.18.6.0/30     *[Direct/0] 00:00:30
                   > via ge-0/0/0.0
172.31.20.0/24    *[BGP/170] 00:00:24, localpref 100
                   AS path: 65000 I, validation-state: unverified
                   > to 172.18.6.1 via ge-0/0/0.0
                   to 172.18.7.1 via ge-0/0/1.0
                   [BGP/170] 00:00:24, localpref 100
                   AS path: 65000 I, validation-state: unverified
                   > to 172.18.7.1 via ge-0/0/1.0
172.31.17.0/24    *[OSPF/150] 00:00:25, metric 1
                   > to 192.168.11.2 via ge-0/0/4.0
                   [BGP/170] 00:00:24, localpref 100
                   AS path: 65000 I, validation-state: unverified
                   > to 172.18.6.1 via ge-0/0/0.0
                   to 172.18.7.1 via ge-0/0/1.0
                   [BGP/170] 00:00:24, localpref 100
                   AS path: 65000 I, validation-state: unverified
                   > to 172.18.7.1 via ge-0/0/1.0
...
```

You notice traffic destined to 172.31.17.0/24 is traversing an OSPF path rather than BGP Path.

What is causing this behavior?

- A. The 172.31.17.0/24 BGP route is missing a valid default next hop
- B. The 172.31.17.0/24 BGP has a higher route preference
- C. The 172.31.17.0/24 route does not have a valid BGP entry
- D. The 172.31.17.0/24 BGP route's outgoing interface is down

Answer: B

NEW QUESTION 80

- (Exam Topic 2)

You are troubleshooting an issue and want to monitor syslog in real time. Which operational command accomplish this task?

- A. Show log message
- B. Monitor start message
- C. Show log message | refresh i
- D. Monitor traffic interface fxp0.0

Answer: B

NEW QUESTION 81

- (Exam Topic 2)

Which of the following protocols uses both TCP and UDP?

- A. FTP
- B. SMTP
- C. Telnet
- D. DNS

Answer: D

NEW QUESTION 86

- (Exam Topic 2)

You suspect a duplicate MAC address on a subnet. You want to display the MAC, errors, and statistics of the ge-O/0/0 interface.

Which command will accomplish this task?

- A. show arp
- B. show interface ge-O/0/0 extensive
- C. show ethernet-switching table
- D. show interface terse

Answer: B

NEW QUESTION 88

- (Exam Topic 2)

Which two keystrokes will auto-complete a command? (Choose two.)

- A. Esc
- B. Tab
- C. Spacebar
- D. End

Answer: BC

NEW QUESTION 92

- (Exam Topic 2)

What are two protocols that the Junos OS uses to archive configuration files remotely? (Choose two.)

- A. SCP
- B. HTTP
- C. SFTP
- D. FTP

Answer: AD

NEW QUESTION 94

- (Exam Topic 2)

Which keystroke combination allows users to move the cursor to the end of the command line without deleting text?

- A. Ctrl + a
- B. Ctrl + e
- C. Ctrl + u
- D. Ctrl + w

Answer: B

NEW QUESTION 97

- (Exam Topic 2)

Which two firewall filter actions will affect a packet's class-of-service setting? (Choose two.)

- A. scheduler
- B. queue
- C. forwarding-class
- D. loss-priority

Answer: CD

NEW QUESTION 102

- (Exam Topic 2)

Which two statements are true regarding dynamic routing? (Choose two)


- A. Dynamic routing is used when absolute control of routing parameters is necessary
- B. Dynamic routing allows a device to automatically reroute traffic around a failure
- C. Participating devices dynamically learn routing information from each other
- D. Dynamic routing requires more administrative overhead than static routing

Answer: BC

NEW QUESTION 103

- (Exam Topic 2)

Your configuration contains the static routes shown in the exhibit.

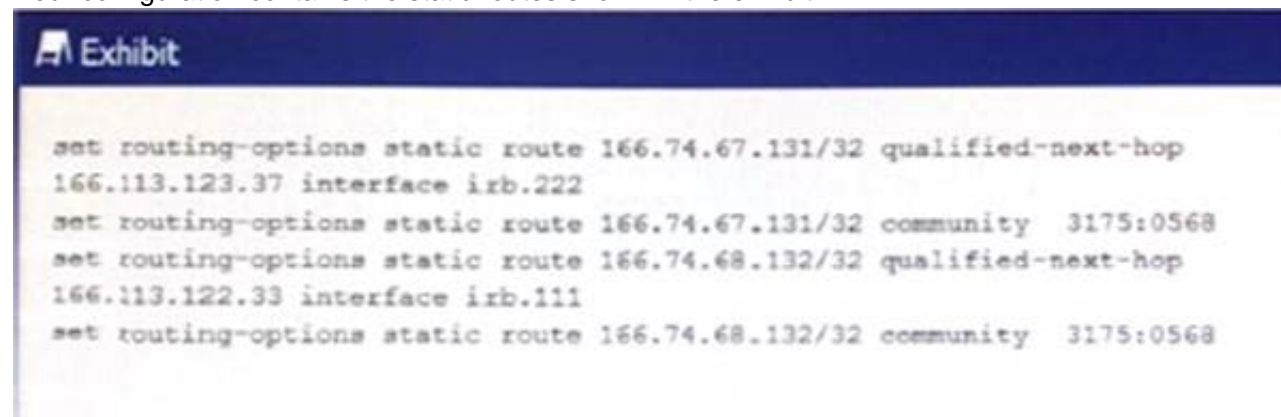

Which command will successfully remove the 166.74.67.131 static route?

- A. delete routing-options static route 166.74.67.131/32 qualified-next-hop 166.113.123.37 interface irb.222
- B. delete routing-options static route 166.74.67.131/32
- C. delete routing-options static route 166.74.67.131/32 qualified-next-hop 166.113.123.37
- D. delete routing-options static route 166.74.67.131/32 qualified-next-hop

Answer: B

NEW QUESTION 107

- (Exam Topic 2)

You are performing the initial configuration of an SRX Series device.

What must you set before the device will allow you to commit your configuration?

- A. management interface
- B. system time
- C. hostname
- D. root authentication

Answer: D

NEW QUESTION 110

- (Exam Topic 2)

Click the Exhibit button.

Item	Version	Part number	Serial number	Description
Chassis			EBE7ABF9EA61	VSRX
Midplane	REV_08	750-058562	4229D770	VSRX
Pseudo CB 0				
Routing Engine 0		BUILTIN	BUILTIN	VSRX-S
FPC 0	REV 07	611-049549	RL3714040884	FPC
PIC 0		BUILTIN	BUILTIN	VSRX DPDK GI

Referring to the exhibit, which command was issued to generate the output?

- A. show chassis routing-engine
- B. show chassis hardware
- C. show chassis environment
- D. show chassis fpc

Answer: B

NEW QUESTION 111

- (Exam Topic 2)

What's is the minimum system-defined user class required to issue clear commands?

- A. read-only
- B. operator
- C. authorized
- D. super-user

Answer: B

NEW QUESTION 114

- (Exam Topic 2)

Which three protocols are connectionless? (Choose three.)

- A. ICMP
- B. Telnet
- C. SSH
- D. TFTP
- E. DNS

Answer: ADE

NEW QUESTION 119

- (Exam Topic 2)

Which two platforms are supposed in both physical and virtual form factors? Choose TWO

- A. NFX Series
- B. ACX Series
- C. SRX Series
- D. MX Series

Answer: CD

NEW QUESTION 121

- (Exam Topic 2)

By default, which character indicates the UNIX shell prompt?

- A. %
- B. \$
- C. >
- D. #

Answer: A

NEW QUESTION 126

- (Exam Topic 2)

Which command displays the output shown in the exhibit?

Fan speed	Yellow alarm		Red alarm		Fire Shutdown		
	(degrees C)		(degrees C)		(degrees C)		(degrees C)
Item	Normal	High	Normal	Bad fan	Normal	Bad fan	Normal
Chassis default	48	54	65	55	75	65	100
Routing Engine 0	55	80	95	95	105	100	108

- A. show chassis temperature-thresholds
- B. show chassis environment
- C. show chassis hardware
- D. show chassis alarms

Answer: A

NEW QUESTION 129

- (Exam Topic 2)

How many IP addresses can be configured on a given interface?

- A. one primary and one secondary
- B. one
- C. as many as you want
- D. one primary and multiple secondary

Answer: C

NEW QUESTION 131

- (Exam Topic 2)

What are two default password requirements on devices running Junos OS? (Choose two.)

- A. Passwords must be at least six characters in length.
- B. An expiration date must be set.
- C. Passwords must contain at least one special character.
- D. Alphanumeric characters classes must be used.

Answer: AD

NEW QUESTION 135

- (Exam Topic 2)

Referring to the Exhibit,

```
user@router> show route protocol static

inet.0: 7 destinations, 8 routes (7 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both

192.168.47.0/24    *[Static/5] 02:02:03
                  > to 172.16.1.2 via ge-1/2/0.0
                  [Static/25] 01:58:21
                  > to 192.168.2.2 via fe-1/2/1.2
```

What information is provided about the route to 192.168.47.0/24? Choose Two

- A. There is a single active route to 192.168.47.0/24
- B. There are two next-hops available to 192.168.47.0/24
- C. There is a single next-hop available to 192.168.47.0/24
- D. There are two active route to 192.168.47.0/24

Answer: AB

NEW QUESTION 140

- (Exam Topic 2)

Which routing table is used for multicasting forwarding cache?

- A. Inet.3
- B. Inet.0
- C. Inet.1
- D. Inet.2

Answer: C

NEW QUESTION 145

- (Exam Topic 2)

Which statement is correct regarding exception traffic on Junos devices?

- A. The Junos OS does not provide congestion control for exception traffic sent to the RE.
- B. The built-in rate limiter for exception traffic is configurable.
- C. All exception traffic destined for the RE is sent over the out-of-band management link.
- D. The Junos OS has a built-in rate limiter for exception traffic.

Answer: D

NEW QUESTION 147

- (Exam Topic 2)

Click the Exhibit button.

Exhibit is Missing

Referring to the exhibit, how many received packets are classified as exception traffic?

- A. 20814681
- B. 14442602
- C. 12417
- D. 27824

Answer: B

NEW QUESTION 148

- (Exam Topic 2)

A Junos device is in a factory-default configuration and no host name is set. What is used in place of a host name in this scenario?

- A. amnesiac
- B. router
- C. Junos
- D. user

Answer: A

NEW QUESTION 152

- (Exam Topic 2)

Which two conditions must exist in a Junos device for traffic to transit the device to a specific destination? (Choose two.)

- A. A routing table entry for that destination must exist.
- B. A firewall filter must exist to allow traffic to reach that destination.
- C. A forwarding table entry for that destination must exist.
- D. A routing policy must be in place on the device.

Answer: AC

NEW QUESTION 154

- (Exam Topic 2)

What does the output of the show route forwarding-table command display?

- A. The routing protocol databases in the Routing Engine
- B. The inactive entries in the Routing Engine's routing table
- C. The Routing Engine's forwarding table
- D. The Packet Forwarding Engine routing table

Answer: C

NEW QUESTION 158

- (Exam Topic 2)

Which Junos release would address only bug fixes that were not contained in the 15.1R1 version of code?

- A. 15.1X2
- B. 15.1R2
- C. 15.1F2
- D. 15.1S2

Answer: B

NEW QUESTION 162

- (Exam Topic 2)

Click the Exhibit button.

```
[edit system ntp]
user@router# show
server 172.25.11.254;
```

Referring to the exhibit, which action would synchronize the local router's clock with the NTP server?

- A. Configure the correct NTP trusted key using the net trusted-key <key-value> configuration command under the [edit system ntp] hierarchy.
- B. Issue the set date ntp operational command.
- C. Configure the NTP server using the set boot-server 172.25.11.254 configuration command under the [edit system ntp] hierarchy.
- D. Reboot the router.

Answer: B

NEW QUESTION 165

- (Exam Topic 2)

Which two methods keep a Junos device operational if the primary storage device fails? (Choose two.)

- A. Create a recovery snapshot.
- B. Enable the ephemeral database.
- C. Enable J-Web for device management.
- D. Create a rescue configuration.

Answer: AD

NEW QUESTION 167

- (Exam Topic 2)

What is the subnet mask for the 172.45.32.6/19 address?

- A. 255.255.224.0
- B. 255.255.240.0
- C. 255.224.0.0
- D. 255.240.0.0

Answer: A

NEW QUESTION 168

- (Exam Topic 2)

Which two statements describe the default behavior for OSPF? (Choose two)

- A. OSPF imports all routes into the inet4.0 routing table.
- B. OSPF exports all static routes into the OSPF database.
- C. OSPF imports all routes into the inet.O routing table.
- D. OSPF does not export static routes into the OSPF database.

Answer: CD

NEW QUESTION 173

- (Exam Topic 2)

Given the configuration shown below: set system authentication-order [tacplus] Which two statement are correct? (Choose two.)

- A. If the TACACS+ server is no available, the user is not allowed to access the device.
- B. If the TACACS+ server is no available, the local database is checked.
- C. If the TACACS+ server is available, and rejects the username/password provided, the local password database is checked.
- D. If the TACACS+ server is available, and rejects the username/password provided, the user is not allowed to access the device.

Answer: BD

NEW QUESTION 177

- (Exam Topic 2)

Which protocol family is required prior to assigning an IP address to an interface?

- A. ip
- B. ip6
- C. inet
- D. inet4

Answer: C

NEW QUESTION 181

- (Exam Topic 2)

When you first log in to a router, how does the router indicate that factory defaults are being used? Junos Configuration Basics

- A. The router's host name is Amnesiac.
- B. The password you used to log in is junos.
- C. The router immediately enters configuration mode after you log in.
- D. The router allows you to enter configuration mode without logging in.

Answer: A

NEW QUESTION 185

- (Exam Topic 2)

Which statement is true about the longer router-filter match type?

- A. All router within the specified prefix that are longer than or equal to the given prefix are considered a match.
- B. All router within the specified prefix that are longer or equal to the given prefix up to a defined acceptable prefix length are considered a match.
- C. All router within the specified prefix that are longer than the given prefix up to a defined acceptable prefix length are considered a match.
- D. All router within the specified prefix that are longer than given prefix are considered a match.

Answer: A

NEW QUESTION 186

- (Exam Topic 2)

Which command is used to replace the current configuration?

- A. load replace
- B. load patch
- C. load override
- D. load set

Answer: C

NEW QUESTION 190

- (Exam Topic 2)

At which hierarchy would you configure a static MAC address for interface ge-0/0/0?

- A. [edit interfaces ge-0/0/0 unit 0]
- B. [edit interfaces ge-0/0/0]
- C. [edit interfaces ge-0/0/0 unit 0 family inet]
- D. [edit interfaces ge-0/0/0 unit 0 family inet address 172.25.11.2/24]

Answer: D

NEW QUESTION 194

- (Exam Topic 2)

Exhibit:

```
{master:0}[edit routing-instances]
root@switch# top set interfaces xe-0/0/39.0 family ethernet-switching
```

Which statement is true about the command shown in the exhibit?

- A. There needs to be a ; after top for the command to be accepted as a valid command.
- B. Only top should be used, no other options are allowed on the same line.
- C. The command shown in the exhibit would be accepted as a valid command.
- D. If you replace top with up command, it becomes valid.

Answer: C

NEW QUESTION 197

- (Exam Topic 2)

What are two services performed by the Packet Forwarding Engine? (Choose two.)

- A. to process transit traffic
- B. to implement stateless firewall filtering
- C. to handle processes that control the device's Interfaces
- D. to maintain the routing tables

Answer: AB

NEW QUESTION 200

- (Exam Topic 2)

How would you change the display so that 40 lines will be displayed in the terminal program when you are logged into a junos device?

- A. Set the window size of your terminal program
- B. Issue that set cli screen-length 40 command from operational mode
- C. Set the display options in your terminal program
- D. Issue that set cli screen-length 40 command from Configuration mode

Answer: B

NEW QUESTION 202

- (Exam Topic 2)

For the interface ge-1/2/3.4, what does "ge" represent?

- A. SONET/SDH
- B. Gigabit Ethernet
- C. Aggregated Ethernet
- D. GRE

Answer: B

NEW QUESTION 204

- (Exam Topic 2)

When multiple users are editing the configuration on a Junos device, What is the default behavior when a user issues a commit command?

- A. The user's configuration changes are committed, other users configuration changes are still pending
- B. The user's configuration changes are committed, other users will be exited from the configuration mode
- C. All valid configuration changes made by all users will take effect
- D. The user will receive an error message disallowing a commit of the configuration

Answer: A

NEW QUESTION 207

- (Exam Topic 2)

You have configure an SRX Series device for the first time. When you commit your configuration, the Junos OS notifies you that you cannot yet commit your configuration. Which configuration step must you complete?

- A. security policies
- B. hostname
- C. date/time
- D. root authentication

Answer: D

NEW QUESTION 211

- (Exam Topic 2)

What is the default route preference for OSPF internal?

- A. 100
- B. 150
- C. 5
- D. 10

Answer: D

NEW QUESTION 212

- (Exam Topic 2)

Which two statements describe a routing policy?

- A. Active and inactive routes are available for export from the routing table.
- B. A routing policy allows you to control the flow of information into the routing table.
- C. Routing policy are used to choose which routes are sent to neighbors using dynamic routing Protocols

D. Attribute changes applied to export policies always affect the local routing table

Answer: BC

NEW QUESTION 213

- (Exam Topic 2)

[edit]

```
user@router# show system authentication-order
authentication-order [ radius tacplus ];
```

Referring to the exhibit, what is the expected behavior for login attempts from users that receive a reject form from both the RADIUS and TACACS+ servers?

- A. Users are prompted for a local authentication password.
- B. Users are not prompted for a local authentication password.
- C. Users are prompted for the root authentication password.
- D. Users are granted limited access to the device using a guest account.

Answer: B

Explanation:

Local Auth is not included in the authentication-order. It will only consult the local auth if it doesn't received any reply from the RADIUS and TACAS from a certain time. In this case the RADIUS and TACAS rejects the Authentication therefore no need to consult the local auth.

NEW QUESTION 217

- (Exam Topic 2)

Referring to the exhibit, which statement is true?

- A. The customer has set the version parameter to automatic.
- B. The customer has not enabled security for BFD.
- C. The customer's link will failover in nine seconds.
- D. The customer's link flappedd within the last hour.

Answer: D

NEW QUESTION 221

- (Exam Topic 2)

Which two commands would you use to reset the candidate configuration to the active configuration? (Choose two.)

- A. rollback 0
- B. rollback 1
- C. rollback 2
- D. rollback

Answer: AD

NEW QUESTION 222

- (Exam Topic 2)

What information would you find using the CLI help function? (Choose two.)

- A. tip of the day
- B. Junos technical publications
- C. explanation of specific system log error messages
- D. explanation of traceoption events

Answer: AC

NEW QUESTION 224

- (Exam Topic 2)

What is the maximum number of rollback files a Junos device can store?

- A. 5
- B. 10
- C. 49
- D. 50

Answer: D

NEW QUESTION 229

- (Exam Topic 2)

Exhibit:

```
[edit snmp]
user@router# show
community my-community {
    authorization read-only;
    clients {
        10.21.15.16/32;
    }
}
trap-group my-first-trap-group {
    version v2;
    categories {
        chassis;
        link;
    }
    targets {
        10.21.15.180;
    }
}
trap-group my-second-trap-group {
    targets {
        10.21.15.181;
    }
}
```

Referring to the exhibit, which statement is true?

- A. Traps are allowed from 10.21.15.180
- B. Traps are sent to 10.21.15.180
- C. Traps are sent to 10.21.15.16
- D. Traps are allowed from 10.21.15.16

Answer: D

NEW QUESTION 232

- (Exam Topic 2)

Which command is used to validate the syntax of a configuration without applying the configuration?

- A. commit check
- B. commit confirmed
- C. commit synchronize
- D. commit and-quit

Answer: A

NEW QUESTION 233

- (Exam Topic 2)

Which command displays all IPv4 routes in the default routing instance?

- A. show route table inet.0
- B. show route table inet.2
- C. show route table inet6.0
- D. show route table inet.1

Answer: A

NEW QUESTION 234

- (Exam Topic 2)

Which two interfaces are considered as physical interface? (Choose two.)

- A. xe-1/1/1
- B. ge-2/0/2.0
- C. et-5/0/0
- D. ae1.1

Answer: AB

NEW QUESTION 239

- (Exam Topic 2)

Which three statements describe OSPF? (Choose three)

- A. OSPF must operate between different autonomous system
- B. OSPF calculates the best path to each destination
- C. OSPF is a link-state IGP
- D. OSPF uses areas to incorporate hierarchy and to allow for scalability
- E. OSPF uses a distance-vector algorithm to calculate routing cost

Answer: BCD

NEW QUESTION 243

- (Exam Topic 2)

Which three statements describe the Transmission Control Protocol (TCP)? (Choose three.)

- A. TCP is a transport layer protocol.
- B. TCP is faster than the User Datagram Protocol (UDP).
- C. TCP provides delivery notification and error-checking mechanisms.
- D. TCP uses a best-effort delivery approach.
- E. TCP application examples include HTTP and SMTP.

Answer: ACE

NEW QUESTION 247

- (Exam Topic 2)

You are in configuration mode at the top of the hierarchy. You need to abort the changes that you have made and start again with a fresh copy of the active configuration. Which command should you use to accomplish this task?

- A. rollback 0
- B. load active
- C. reset config
- D. clear candidate config

Answer: A

NEW QUESTION 251

- (Exam Topic 2)

Which command will completely turn off a Junos device?

- A. request system halt
- B. request chassis fpc offline
- C. request system power-off
- D. request system recover

Answer: C

NEW QUESTION 253

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your JN0-104 Exam with Our Prep Materials Via below:

<https://www.certleader.com/JN0-104-dumps.html>