



CheckPoint

Exam Questions 156-215.81

Check Point Certified Security Administrator R81

About ExamBible

Your Partner of IT Exam

Found in 1998

ExamBible is a company specialized on providing high quality IT exam practice study materials, especially Cisco CCNA, CCDA, CCNP, CCIE, Checkpoint CCSE, CompTIA A+, Network+ certification practice exams and so on. We guarantee that the candidates will not only pass any IT exam at the first attempt but also get profound understanding about the certificates they have got. There are so many alike companies in this industry, however, ExamBible has its unique advantages that other companies could not achieve.

Our Advances

* 99.9% Uptime

All examinations will be up to date.

* 24/7 Quality Support

We will provide service round the clock.

* 100% Pass Rate

Our guarantee that you will pass the exam.

* Unique Gurantee

If you do not pass the exam at the first time, we will not only arrange FULL REFUND for you, but also provide you another exam of your claim, ABSOLUTELY FREE!

NEW QUESTION 1

Which of the following is NOT an authentication scheme used for accounts created through SmartConsole?

- A. RADIUS
- B. Check Point password
- C. Security questions
- D. SecurID

Answer: C

NEW QUESTION 2

What is the purpose of the Stealth Rule?

- A. To prevent users from directly connecting to a Security Gateway.
- B. To reduce the number of rules in the database.
- C. To reduce the amount of logs for performance issues.
- D. To hide the gateway from the Internet.

Answer: A

NEW QUESTION 3

Fill in the blanks: Gaia can be configured using _____ the _____.

- A. Command line interface; WebUI
- B. Gaia Interface; GaiaUI
- C. WebUI; Gaia Interface
- D. GaiaUI; command line interface

Answer: A

Explanation:

https://sc1.checkpoint.com/documents/R81/WebAdminGuides/EN/CP_R81_Gaia_AdminGuide/Topics-GAG/C

NEW QUESTION 4

Administrator Dave logs into R80 Management Server to review and makes some rule changes. He notices that there is a padlock sign next to the DNS rule in the Rule Base.

No.	Name	Source	Destination	VPN	Services & Applications	Action	Track	Install On
1	NetBIOS Noise	* Any	* Any	* Any	NBT	Drop	- None	Policy Targets
2	Management	Net_10.28.0.0	GW-R7730	* Any	https ssh	Accept	Log	Policy Targets
3	Stealth	* Any	GW-R7730	* Any	* Any	Drop	Log	Policy Targets
4	 DNS	Net_10.28.0.0	* Any	* Any	* Any	Accept	Log	Policy Targets
5	Web	Net_10.28.0.0	* Any	* Any	nisp https	Accept	Log	Policy Targets
6	DMZ Access	Net_10.28.0.0	DMZ_Net_192.0.2.0	* Any	ftp	Accept	Log	Policy Targets
7	Cleanup rule	* Any	* Any	* Any	* Any	Drop	Log	Policy Targets

What is the possible explanation for this?

- A. DNS Rule is using one of the new feature of R80 where an administrator can mark a rule with the padlock icon to let other administrators know it is important.
- B. Another administrator is logged into the Management and currently editing the DNS Rule.
- C. DNS Rule is a placeholder rule for a rule that existed in the past but was deleted.
- D. This is normal behavior in R80 when there are duplicate rules in the Rule Base.

Answer: B

NEW QUESTION 5

Choose what BEST describes the reason why querying logs now is very fast.

- A. New Smart-1 appliances double the physical memory install
- B. Indexing Engine indexes logs for faster search results
- C. SmartConsole now queries results directly from the Security Gateway
- D. The amount of logs been store is less than the usual in older versions

Answer: B

Explanation:

Ref: https://sc1.checkpoint.com/documents/R80.40/WebAdminGuides/EN/CP_R80.40_LoggingAndMonitoring_Ad

NEW QUESTION 6

When enabling tracking on a rule, what is the default option?

- A. Accounting Log
- B. Extended Log
- C. Log
- D. Detailed Log

Answer: C

NEW QUESTION 7

You are the Check Point administrator for Alpha Corp. You received a call that one of the users is unable to browse the Internet on their new tablet which is connected to the company wireless, which goes through a Check Point Gateway. How would you review the logs to see what is blocking this traffic?

- A. Open SmartLog and connect remotely to the wireless controller
- B. Open SmartEvent to see why they are being blocked
- C. Open SmartDashboard and review the logs tab
- D. From SmartConsole, go to the Log & Monitor and filter for the IP address of the tablet.

Answer: D

NEW QUESTION 8

Which tool allows you to monitor the top bandwidth on smart console?

- A. Logs & Monitoring
- B. Smart Event
- C. Gateways & Servers Tab
- D. SmartView Monitor

Answer: D

Explanation:

https://sc1.checkpoint.com/documents/R81/WebAdminGuides/EN/CP_R81_LoggingAndMonitoring_AdminGu

NEW QUESTION 9

Fill in the blank: When LDAP is integrated with Check Point Security Management, it is then referred to as _____.

- A. User Center
- B. User Administration
- C. User Directory
- D. UserCheck

Answer: C

Explanation:

User Directory lets you configure:

High Availability, to duplicate user data across multiple servers for backup. See Account Units and High Availability.

Multiple Account Units, for distributed databases.

Define LDAP Account Units, for encrypted User Directory connections. See Modifying the LDAP Server. Profiles, to support multiple LDAP vendors. See User Directory Profiles. https://sc1.checkpoint.com/documents/R81/WebAdminGuides/EN/CP_R81_SecurityManagement_AdminGuide

NEW QUESTION 10

Which path below is available only when CoreXL is enabled?

- A. Slow path
- B. Firewall path
- C. Medium path
- D. Accelerated path

Answer: C

NEW QUESTION 10

What is the purpose of the Clean-up Rule?

- A. To log all traffic that is not explicitly allowed or denied in the Rule Base
- B. To clean up policies found inconsistent with the compliance blade reports
- C. To remove all rules that could have a conflict with other rules in the database
- D. To eliminate duplicate log entries in the Security Gateway

Answer: A

Explanation:

These are basic access control rules we recommend for all Rule Bases:

There is also an implied rule that drops all traffic, but you can use the Cleanup rule to log the traffic.

NEW QUESTION 15

From the Gaia web interface, which of the following operations CANNOT be performed on a Security Management Server?

- A. Verify a Security Policy
- B. Open a terminal shell
- C. Add a static route
- D. View Security Management GUI Clients

Answer: B

NEW QUESTION 20

Fill in the blanks: Default port numbers for an LDAP server is _____ for standard connections and _____ SSL connections.

- A. 675, 389
- B. 389, 636
- C. 636, 290
- D. 290, 675

Answer: B

Explanation:

A client starts an LDAP session by connecting to an LDAP server, called a Directory System Agent (DSA), by default on TCP and UDP port 389, or on port 636 for LDAPS. Global Catalog is available by default on ports 3268, and 3269 for LDAPS.

NEW QUESTION 21

Which option would allow you to make a backup copy of the OS and Check Point configuration, without stopping Check Point processes?

- A. All options stop Check Point processes
- B. backup
- C. migrate export
- D. snapshot

Answer: D

NEW QUESTION 25

Using ClusterXL, what statement is true about the Sticky Decision Function?

- A. Can only be changed for Load Sharing implementations
- B. All connections are processed and synchronized by the pivot
- C. Is configured using cpconfig
- D. Is only relevant when using SecureXL

Answer: A

NEW QUESTION 26

John is using Management HA. Which Smartcenter should be connected to for making changes?

- A. secondary Smartcenter
- B. active Smartcenter
- C. connect virtual IP of Smartcenter HA
- D. primary Smartcenter

Answer: B

NEW QUESTION 31

Fill in the blank: _____ is the Gaia command that turns the server off.

- A. sysdown
- B. exit
- C. halt
- D. shut-down

Answer: C

NEW QUESTION 34

How do logs change when the "Accounting" tracking option is enabled on a traffic rule?

- A. Involved traffic logs will be forwarded to a log server.
- B. Provides log details view email to the Administrator.
- C. Involved traffic logs are updated every 10 minutes to show how much data has passed on the connection.
- D. Provides additional information to the connected user.

Answer: C

Explanation:

Accounting - Select this to update the log at 10 minutes intervals, to show how much data has passed in the connection: Upload bytes, Download bytes, and browse time. https://sc1.checkpoint.com/documents/R81/WebAdminGuides/EN/CP_R81_LoggingAndMonitoring_AdminGu

NEW QUESTION 37

What is the SOLR database for?

- A. Used for full text search and enables powerful matching capabilities
- B. Writes data to the database and full text search
- C. Serves GUI responsible to transfer request to the DLE server
- D. Enables powerful matching capabilities and writes data to the database

Answer: A

NEW QUESTION 40

Which two Identity Awareness daemons are used to support identity sharing?

- A. Policy Activation Point (PAP) and Policy Decision Point (PDP)
- B. Policy Manipulation Point (PMP) and Policy Activation Point (PAP)
- C. Policy Enforcement Point (PEP) and Policy Manipulation Point (PMP)
- D. Policy Decision Point (PDP) and Policy Enforcement Point (PEP)

Answer: D

Explanation:

https://supportcenter.checkpoint.com/supportcenter/portal?eventSubmit_doGoviewsolutiondetails=&solutionid=

NEW QUESTION 41

In R80 Management, apart from using SmartConsole, objects or rules can also be modified using:

- A. 3rd Party integration of CLI and API for Gateways prior to R80.
- B. A complete CLI and API interface using SSH and custom CPCODE integration.
- C. 3rd Party integration of CLI and API for Management prior to R80.
- D. A complete CLI and API interface for Management with 3rd Party integration.

Answer: B

NEW QUESTION 42

Both major kinds of NAT support Hide and Static NAT. However, one offers more flexibility. Which statement is true?

- A. Manual NAT can offer more flexibility than Automatic NAT.
- B. Dynamic Network Address Translation (NAT) Overloading can offer more flexibility than Port Address Translation.
- C. Dynamic NAT with Port Address Translation can offer more flexibility than Network Address Translation (NAT) Overloading.
- D. Automatic NAT can offer more flexibility than Manual NAT.

Answer: A

Explanation:

"An Auto-NAT rule only uses the source address and port when matching and translating. Manual NAT can match and translate source and destination addresses and ports." <https://networkdirection.net/articles/firewalls/firepowermanagementcentre/fmcdnatpolicies/>

NEW QUESTION 43

Rugged appliances are small appliances with ruggedized hardware and like Quantum Spark appliance they use which operating system?

- A. Centos Linux
- B. Gaia embedded
- C. Gaia
- D. Red Hat Enterprise Linux version 5


Answer: B

Explanation:

https://supportcenter.checkpoint.com/supportcenter/portal?eventSubmit_doGoviewsolutiondetails=&solutionid=

NEW QUESTION 46

Consider the Global Properties following settings:

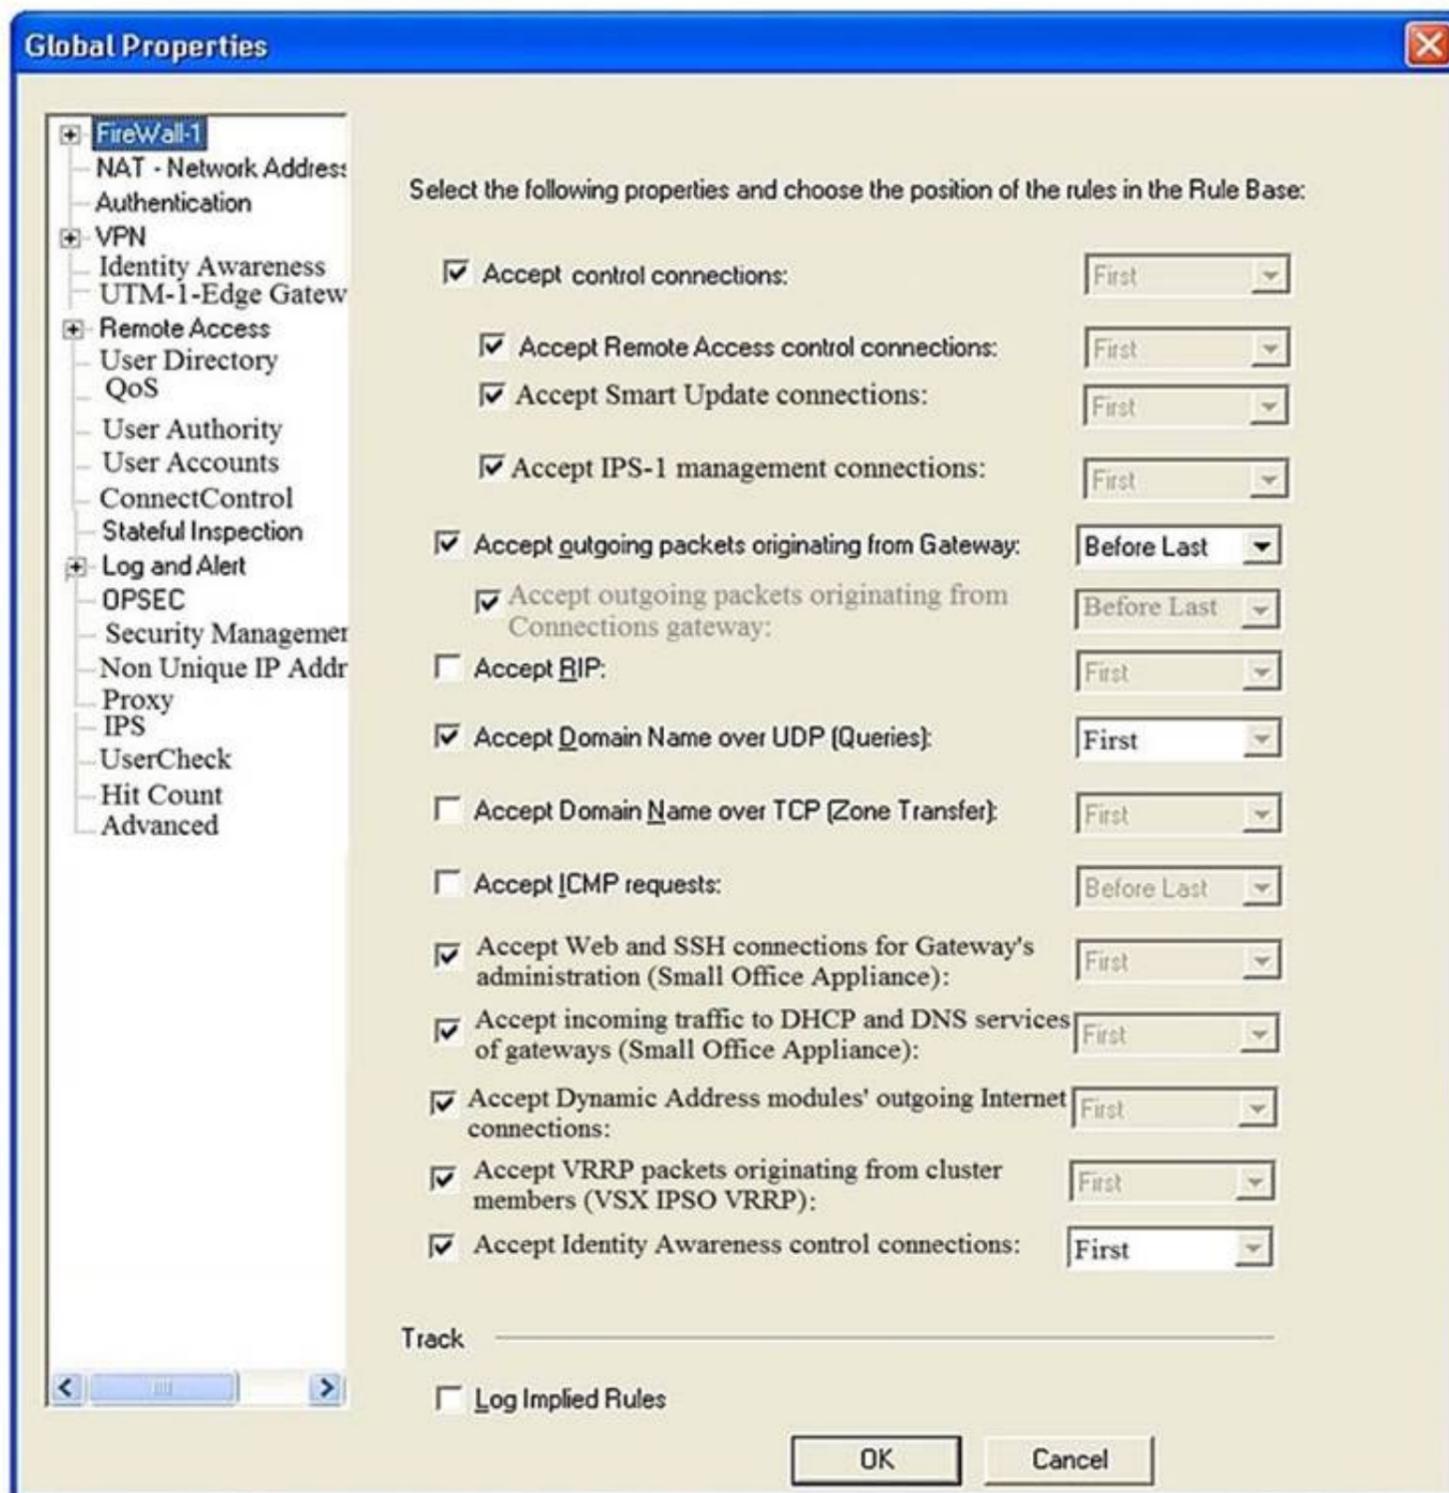

The selected option "Accept Domain Name over UDP (Queries)" means:

- A. UDP Queries will be accepted by the traffic allowed only through interfaces with external anti-spoofing topology and this will be done before first explicit rule written by Administrator in a Security Policy.
- B. All UDP Queries will be accepted by the traffic allowed through all interfaces and this will be done before first explicit rule written by Administrator in a Security Policy.
- C. No UDP Queries will be accepted by the traffic allowed through all interfaces and this will be done before first explicit rule written by Administrator in a Security Policy.
- D. All UDP Queries will be accepted by the traffic allowed by first explicit rule written by Administrator in a Security Policy.

Answer: A

NEW QUESTION 49

Gaia has two default user accounts that cannot be deleted. What are those user accounts?

- A. Admin and Default
- B. Expert and Clish
- C. Control and Monitor
- D. Admin and Monitor

Answer: D

NEW QUESTION 54

Which backup utility captures the most information and tends to create the largest archives?

- A. backup
- B. snapshot
- C. Database Revision
- D. migrate export

Answer: B

NEW QUESTION 56

What type of NAT is a one-to-one relationship where each host is translated to a unique address?

- A. Source
- B. Static
- C. Hide
- D. Destination

Answer: B

NEW QUESTION 59

Which Check Point software blade provides Application Security and identity control?

- A. Identity Awareness
- B. Data Loss Prevention
- C. URL Filtering
- D. Application Control

Answer: D

Explanation:

Check Point Application Control provides the industry's strongest application security and identity control to organizations of all sizes.

NEW QUESTION 61

You have discovered suspicious activity in your network. What is the BEST immediate action to take?

- A. Create a policy rule to block the traffic.
- B. Create a suspicious action rule to block that traffic.
- C. Wait until traffic has been identified before making any changes.
- D. Contact ISP to block the traffic.

Answer: B

NEW QUESTION 65

Where is the "Hit Count" feature enabled or disabled in SmartConsole?

- A. On the Policy Package
- B. On each Security Gateway
- C. On the Policy layer
- D. In Global Properties for the Security Management Server

Answer: B

Explanation:

References:

NEW QUESTION 67

What is a reason for manual creation of a NAT rule?

- A. In R80 all Network Address Translation is done automatically and there is no need for manually defined NAT-rules.
- B. Network Address Translation of RFC1918-compliant networks is needed to access the Internet.
- C. Network Address Translation is desired for some services, but not for others.
- D. The public IP-address is different from the gateway's external IP

Answer: D

NEW QUESTION 72

To increase security, the administrator has modified the Core protection 'Host Port Scan' from 'Medium' to 'High' Predefined Sensitivity. Which Policy should the administrator install after Publishing the changes?

- A. The Access Control and Threat Prevention Policies.
- B. The Access Control Policy.
- C. The Access Control & HTTPS Inspection Policy.
- D. The Threat Prevention Policy.

Answer: D

Explanation:

<https://supportcenter.checkpoint.com/supportcenter/portal?action=portlets.SearchResultMainAction&eventSubm>

NEW QUESTION 75

You are the Check Point administrator for Alpha Corp with an R80 Check Point estate. You have received a call by one of the management users stating that they are unable to browse the Internet with their new tablet connected to the company Wireless. The Wireless system goes through the Check Point Gateway. How do you review the logs to see what the problem may be?

- A. Open SmartLog and connect remotely to the IP of the wireless controller
- B. Open SmartView Tracker and filter the logs for the IP address of the tablet

- C. Open SmartView Tracker and check all the IP logs for the tablet
- D. Open SmartLog and query for the IP address of the Manager's tablet

Answer: B

NEW QUESTION 80

Using R80 Smart Console, what does a "pencil icon" in a rule mean?

- A. I have changed this rule
- B. Someone else has changed this rule
- C. This rule is managed by check point's SOC
- D. This rule can't be changed as it's an implied rule

Answer: A

NEW QUESTION 83

Which back up method uses the command line to create an image of the OS?

- A. System backup
- B. Save Configuration
- C. Migrate
- D. snapshot

Answer: D

NEW QUESTION 86

Which Threat Prevention Profile is not included by default in R80 Management?

- A. Basic – Provides reliable protection on a range of non-HTTP protocols for servers, with minimal impact on network performance
- B. Optimized – Provides excellent protection for common network products and protocols against recent or popular attacks
- C. Strict – Provides a wide coverage for all products and protocols, with impact on network performance
- D. Recommended – Provides all protection for all common network products and servers, with impact on network performance

Answer: D

NEW QUESTION 87

Fill in the blank: When a policy package is installed, _____ are also distributed to the target installation Security Gateways.

- A. User and objects databases
- B. Network databases
- C. SmartConsole databases
- D. User databases

Answer: A

Explanation:

A policy package is a collection of different types of policies. After installation, the Security Gateway enforces all the policies in the package. A policy package can have one or more of these policy types:

The installation process:

If there are verification errors, the policy is not installed. If there are verification warnings (for example, if anti-spoofing is not enabled for a Security Gateway with multiple interfaces), the policy package is installed with a warning.

NEW QUESTION 90

What is the most complete definition of the difference between the Install Policy button on the SmartConsole's tab, and the Install Policy within a specific policy?

- A. The Global one also saves and published the session before installation.
- B. The Global one can install multiple selected policies at the same time.
- C. The local one does not install the Anti-Malware policy along with the Network policy.
- D. The second one pre-select the installation for only the current policy and for the applicable gateways.

Answer: D

NEW QUESTION 92

Fill in the blank: Authentication rules are defined for _____.

- A. User groups
- B. Users using UserCheck
- C. Individual users
- D. All users in the database

Answer: A

NEW QUESTION 95

What are the Threat Prevention software components available on the Check Point Security Gateway?

- A. IPS, Threat Emulation and Threat Extraction
- B. IPS, Anti-Bot, Anti-Virus, SandBlast and Macro Extraction
- C. IPS, Anti-Bot, Anti-Virus, Threat Emulation and Threat Extraction
- D. IDS, Forensics, Anti-Virus, Sandboxing

Answer: C

NEW QUESTION 98

What needs to be configured if the NAT property 'Translate destination on client side' is not enabled in Global properties?

- A. A host route to route to the destination IP
- B. Use the file local.arp to add the ARP entries for NAT to work
- C. Nothing, the Gateway takes care of all details necessary
- D. Enabling 'Allow bi-directional NAT' for NAT to work correctly

Answer: C

NEW QUESTION 100

What is the BEST command to view configuration details of all interfaces in Gaia CLISH?

- A. ifconfig -a
- B. show interfaces
- C. show interfaces detail
- D. show configuration interface

Answer: D

NEW QUESTION 103

Application Control/URL filtering database library is known as:

- A. Application database
- B. AppWiki
- C. Application-Forensic Database
- D. Application Library

Answer: B

Explanation:

https://supportcenter.checkpoint.com/supportcenter/portal?eventSubmit_doGoviewsolutiondetails=&solutionid=

NEW QUESTION 108

Which of the following describes how Threat Extraction functions?

- A. Detect threats and provides a detailed report of discovered threats
- B. Proactively detects threats
- C. Delivers file with original content
- D. Delivers PDF versions of original files with active content removed

Answer: B

NEW QUESTION 110

When a Security Gateways sends its logs to an IP address other than its own, which deployment option is installed?

- A. Distributed
- B. Standalone
- C. Bridge

Answer: A

NEW QUESTION 112

Which two of these Check Point Protocols are used by ?

- A. ELA and CPD
- B. FWD and LEA
- C. FWD and CPLOG
- D. ELA and CPLOG

Answer: B

NEW QUESTION 116

You are going to perform a major upgrade. Which back up solution should you use to ensure your database can be restored on that device?

- A. backup
- B. logswitch
- C. Database Revision

D. snapshot

Answer: D

Explanation:

The snapshot creates a binary image of the entire root (lv_current) disk partition. This includes Check Point products, configuration, and operating system. Starting in R77.10, exporting an image from one machine and importing that image on another machine of the same type is supported. The log partition is not included in the snapshot. Therefore, any locally stored FireWall logs will not be save

NEW QUESTION 120

After a new Log Server is added to the environment and the SIC trust has been established with the SMS what will the gateways do?

- A. The gateways can only send logs to an SMS and cannot send logs to a Log Serve
- B. Log Servers are proprietary log archive servers.
- C. Gateways will send new firewall logs to the new Log Server as soon as the SIC trust is set up between the SMS and the new Log Server.
- D. The firewalls will detect the new Log Server after the next policy install and redirect the new logs to the new Log Server.
- E. Logs are not automatically forwarded to a new Log Serve
- F. SmartConsole must be used to manually configure each gateway to send its logs to the server.

Answer: D

Explanation:

https://sc1.checkpoint.com/documents/SMB_R80.20/AdminGuides/Locally_Managed/EN/Content/Topics/Conf
https://sc1.checkpoint.com/documents/SMB_R80.20/AdminGuides/Locally_Managed/EN/Content/Topics/Conf

NEW QUESTION 122

True or False: In R80, more than one administrator can login to the Security Management Server with write permission at the same time.

- A. False, this feature has to be enabled in the Global Properties.
- B. True, every administrator works in a session that is independent of the other administrators.
- C. True, every administrator works on a different database that is independent of the other administrators.
- D. False, only one administrator can login with write permission.

Answer: B

Explanation:

More than one administrator can connect to the Security Management Server at the same time. Every administrator has their own username, and works in a session that is independent of the other administrators.

NEW QUESTION 123

True or False: The destination server for Security Gateway logs depends on a Security Management Server configuration.

- A. False, log servers are configured on the Log Server General Properties
- B. True, all Security Gateways will only forward logs with a SmartCenter Server configuration
- C. True, all Security Gateways forward logs automatically to the Security Management Server
- D. False, log servers are enabled on the Security Gateway General Properties

Answer: B

NEW QUESTION 126

In what way is Secure Network Distributor (SND) a relevant feature of the Security Gateway?

- A. SND is a feature to accelerate multiple SSL VPN connections
- B. SND is an alternative to IPSec Main Mode, using only 3 packets
- C. SND is used to distribute packets among Firewall instances
- D. SND is a feature of fw monitor to capture accelerated packets

Answer: C

NEW QUESTION 129

When changes are made to a Rule base, it is important to _____ to enforce changes.

- A. Publish database
- B. Activate policy
- C. Install policy
- D. Save changes

Answer: C

NEW QUESTION 134

Fill in the blank: By default, the SIC certificates issued by R80 Management Server are based on the _____ algorithm.

- A. SHA-256
- B. SHA-200
- C. MD5
- D. SHA-128

Answer: A

NEW QUESTION 138

Which of the following technologies extracts detailed information from packets and stores that information in state tables?

- A. INSPECT Engine
- B. Next-Generation Firewall
- C. Packet Filtering
- D. Application Layer Firewall

Answer: A

Explanation:

Check Point FireWall-1's Stateful Inspection overcomes the limitations of the previous two approaches by providing full application-layer awareness without breaking the client/server model. With Stateful Inspection, the packet is intercepted at the network layer, but then the INSPECT Engine takes over. It extracts state-related information required for the security decision from all application layers and maintains this information in dynamic state tables for evaluating subsequent connection attempts. This provides a solution which is highly secure and offers maximum performance, scalability, and extensibility.

NEW QUESTION 142

Which GUI tool can be used to view and apply Check Point licenses?

- A. cpconfig
- B. Management Command Line
- C. SmartConsole
- D. SmartUpdate

Answer: D

Explanation:

SmartUpdate GUI is the recommended way of managing licenses.

NEW QUESTION 144

Which option in a firewall rule would only match and allow traffic to VPN gateways for one Community in common?

- A. All Connections (Clear or Encrypted)
- B. Accept all encrypted traffic
- C. Specific VPN Communities
- D. All Site-to-Site VPN Communities

Answer: C

NEW QUESTION 145

When a Security Gateway sends its logs to an IP address other than its own, which deployment option is installed?

- A. Distributed
- B. Standalone
- C. Bridge Mode
- D. Targeted

Answer: A

NEW QUESTION 146

Full synchronization between cluster members is handled by Firewall Kernel. Which port is used for this?

- A. UDP port 265
- B. TCP port 265
- C. UDP port 256
- D. TCP port 256

Answer: B

NEW QUESTION 149

Which of the following Windows Security Events will NOT map a username to an IP address in Identity Awareness?

- A. Kerberos Ticket Renewed
- B. Kerberos Ticket Requested
- C. Account Logon
- D. Kerberos Ticket Timed Out

Answer: D

NEW QUESTION 150

Fill in the blank: When tunnel test packets no longer invoke a response, SmartView Monitor displays _____ for the given VPN tunnel.

- A. Down

- B. No Response
- C. Inactive
- D. Failed

Answer: A

NEW QUESTION 155

To enforce the Security Policy correctly, a Security Gateway requires:

- A. a routing table
- B. awareness of the network topology
- C. a Demilitarized Zone
- D. a Security Policy install

Answer: B

Explanation:

The network topology represents the internal network (both the LAN and the DMZ) protected by the gateway. The gateway must be aware of the layout of the network topology to:

NEW QUESTION 156

Which application is used for the central management and deployment of licenses and packages?

- A. SmartProvisioning
- B. SmartLicense
- C. SmartUpdate
- D. Deployment Agent

Answer: C

NEW QUESTION 158

Which of the following is NOT a role of the SmartCenter:

- A. Status monitoring
- B. Policy configuration
- C. Certificate authority
- D. Address translation

Answer: C

NEW QUESTION 160

What command from the CLI would be used to view current licensing?

- A. license view
- B. fw ctl tab -t license -s
- C. show license -s
- D. cplic print

Answer: D

NEW QUESTION 164

An administrator is creating an IPsec site-to-site VPN between his corporate office and branch office. Both offices are protected by Check Point Security Gateway managed by the same Security Management Server (SMS). While configuring the VPN community to specify the pre-shared secret, the administrator did not find a box to input the pre-shared secret. Why does it not allow him to specify the pre-shared secret?

- A. The Gateway is an SMB device
- B. The checkbox "Use only Shared Secret for all external members" is not checked
- C. Certificate based Authentication is the only authentication method available between two Security Gateway managed by the same SMS
- D. Pre-shared secret is already configured in Global Properties

Answer: C

NEW QUESTION 166

True or False: In a Distributed Environment, a Central License can be installed via CLI on a Security Gateway

- A. True, CLI is the prefer method for Licensing
- B. False, Central License are handled via Security Management Server
- C. False, Central License are installed via Gaia on Security Gateways
- D. True, Central License can be installed with CPLIC command on a Security Gateway

Answer: D

NEW QUESTION 171

When defining group-based access in an LDAP environment with Identity Awareness, what is the BEST object type to represent an LDAP group in a Security Policy?

- A. Access Role
- B. User Group
- C. SmartDirectory Group
- D. Group Template

Answer: A

NEW QUESTION 174

Which of the following cannot be configured in an Access Role Object?

- A. Networks
- B. Users
- C. Time
- D. Machines

Answer: C

Explanation:

Access Role objects includes one or more of these objects: Networks.

Users and user groups. Computers and computer groups. Remote Access Clients.

https://sc1.checkpoint.com/documents/R81/WebAdminGuides/EN/CP_R81_IdentityAwareness_AdminGuide/T

NEW QUESTION 176

The SIC Status "Unknown" means

- A. There is connection between the gateway and Security Management Server but it is not trusted.
- B. The secure communication is established.
- C. There is no connection between the gateway and Security Management Server.
- D. The Security Management Server can contact the gateway, but cannot establish SIC.

Answer: C

Explanation:

SIC Status

After the gateway receives the certificate issued by the ICA, the SIC status shows if the Security Management Server can communicate securely with this gateway:

NEW QUESTION 180

Fill in the blank: Once a certificate is revoked from the Security GateWay by the Security Management Server, the certificate information is _____.

- A. Sent to the Internal Certificate Authority.
- B. Sent to the Security Administrator.
- C. Stored on the Security Management Server.
- D. Stored on the Certificate Revocation List.

Answer: D

NEW QUESTION 183

Which of the following log queries would show only dropped packets with source address of 192.168.1.1 and destination address of 172.26.1.1?

- A. src:192.168.1.1 OR dst:172.26.1.1 AND action:Drop
- B. src:192.168.1.1 AND dst:172.26.1.1 AND action:Drop
- C. 192.168.1.1 AND 172.26.1.1 AND drop
- D. 192.168.1.1 OR 172.26.1.1 AND action:Drop

Answer: B

NEW QUESTION 185

Which of the following is NOT an advantage to using multiple LDAP servers?

- A. You achieve a faster access time by placing LDAP servers containing the database at remote sites
- B. You achieve compartmentalization by allowing a large number of users to be distributed across several servers
- C. Information on a user is hidden, yet distributed across several servers.
- D. You gain High Availability by replicating the same information on several servers

Answer: C

NEW QUESTION 187

Most Check Point deployments use Gaia but which product deployment utilizes special Check Point code (with unification in R81.10)?

- A. Enterprise Network Security Appliances
- B. Rugged Appliances
- C. Scalable Platforms
- D. Small Business and Branch Office Appliances

Answer: A

NEW QUESTION 189

Which Check Point software blade prevents malicious files from entering a network using virus signatures and anomaly-based protections from ThreatCloud?

- A. Firewall
- B. Application Control
- C. Anti-spam and Email Security
- D. Anti-Virus

Answer: D

Explanation:

https://sc1.checkpoint.com/documents/R81/WebAdminGuides/EN/CP_R81_ThreatPrevention_AdminGuide/To

NEW QUESTION 191

Security Zones do not work with what type of defined rule?

- A. Application Control rule
- B. Manual NAT rule
- C. IPS bypass rule
- D. Firewall rule

Answer: B

Explanation:

<https://community.checkpoint.com/t5/Management/Workaround-for-manual-NAT-when-security-zones-are-use>

NEW QUESTION 194

Fill in the blanks: A _____ license requires an administrator to designate a gateway for attachment whereas a _____ license is automatically attached to a Security Gateway.

- A. Formal; corporate
- B. Local; formal
- C. Local; central
- D. Central; local

Answer: D

NEW QUESTION 198

Which is a main component of the Check Point security management architecture?

- A. Identity Collector
- B. Endpoint VPN client
- C. SmartConsole
- D. Proxy Server

Answer: C

Explanation:

<https://community.checkpoint.com/t5/Check-Point-for-Beginners-2-0/Part-1-The-Architecture/ba-p/88043> Security Gateway (SG) is usually deployed on the perimeter to control and secure traffic with Firewall and Threat Prevention capabilities.

Security Management Server (SMS) defines and controls security policies on the Gateways. It can also be used to as a log server with built-in system of log indexing (SmartLog) and event correlation (SmartEvent – a SIEM-like solution for Check Point products). Usually, SMS is the main element of central management with multiple Security Gateways in operation. Nevertheless, you need an SMS even if your security system has a single gateway only.

SmartConsole is a GUI administration tool to connect to SMS. Through this tool, a security administrator is able to prepare and apply security policies to the Security Gateways.

NEW QUESTION 202

How Capsule Connect and Capsule Workspace differ?

- A. Capsule Connect provides a Layer3 VP
- B. Capsule Workspace provides a Desktop with usable applications
- C. Capsule Workspace can provide access to any application
- D. Capsule Connect provides Business data isolation
- E. Capsule Connect does not require an installed application at client

Answer: A

NEW QUESTION 205

Which of the following is NOT supported by Bridge Mode Check Point Security Gateway

- A. Antivirus
- B. Data Loss Prevention
- C. NAT
- D. Application Control

Answer: C

NEW QUESTION 207

What is the main difference between Threat Extraction and Threat Emulation?

- A. Threat Emulation never delivers a file and takes more than 3 minutes to complete
- B. Threat Extraction always delivers a file and takes less than a second to complete
- C. Threat Emulation never delivers a file that takes less than a second to complete
- D. Threat Extraction never delivers a file and takes more than 3 minutes to complete

Answer: B

NEW QUESTION 210

You have created a rule at the top of your Rule Base to permit Guest Wireless access to the Internet. However, when guest users attempt to reach the Internet, they are not seeing the splash page to accept your Terms of Service, and cannot access the Internet. How can you fix this?

No.	Hits	Name	Source	Destination	VPN	Services & Applications	Action	Track
1	0	Guest Access	GuestUsers	* Any	* Any	* Any	Accept	Log

- A. Right click Accept in the rule, select "More", and then check "Enable Identity Captive Portal"
- B. On the firewall object, Legacy Authentication screen, check "Enable Identity Captive Portal"
- C. In the Captive Portal screen of Global Properties, check "Enable Identity Captive Portal"
- D. On the Security Management Server object, check the box "Identity Logging"

Answer: A

NEW QUESTION 214

SandBlast offers flexibility in implementation based on their individual business needs. What is an option for deployment of Check Point SandBlast Zero-Day Protection?

- A. Smart Cloud Services
- B. Load Sharing Mode Services
- C. Threat Agent Solution
- D. Public Cloud Services

Answer: A

NEW QUESTION 216

Which option, when applied to a rule, allows traffic to VPN gateways in specific VPN communities?

- A. All Connections (Clear or Encrypted)
- B. Accept all encrypted traffic
- C. Specific VPN Communities
- D. All Site-to-Site VPN Communities

Answer: B

Explanation:

The first rule is the automatic rule for the Accept All Encrypted Traffic feature. The Firewalls for the Security Gateways in the BranchOffices and LondonOffices VPN communities allow all VPN traffic from hosts in clients in these communities. Traffic to the Security Gateways is dropped. This rule is installed on all Security Gateways in these communities.

* 2. Site to site VPN - Connections between hosts in the VPN domains of all Site to Site VPN communities are allowed. These are the only protocols that are allowed: FTP, HTTP, HTTPS and SMTP.

* 3. Remote access - Connections between hosts in the VPN domains of RemoteAccess VPN community are allowed. These are the only protocols that are allowed: HTTP, HTTPS, and IMAP.

NEW QUESTION 218

CPU-level of your Security gateway is peaking to 100% causing problems with traffic. You suspect that the problem might be the Threat Prevention settings. The following Threat Prevention Profile has been created.

Company TP Profile

Provide very wide coverage for all products and protocols, with noticeable performance impact.

General Policy

IPS

Anti-Bot

Anti-Virus

Threat Emulation

Malware DNS Trap

Blades Activation

IPS Anti-Bot Anti-Virus Threat Emulation

Activate Protections

Performance Impact:

Severity:

Activation Mode

High Confidence:

Medium Confidence:

Low Confidence:

How could you tune the profile in order to lower the CPU load still maintaining security at good level? Select the BEST answer.

- A. Set High Confidence to Low and Low Confidence to Inactive.
- B. Set the Performance Impact to Medium or lower.
- C. The problem is not with the Threat Prevention Profil
- D. Consider adding more memory to the appliance.
- E. Set the Performance Impact to Very Low Confidence to Prevent.

Answer: B

NEW QUESTION 223

After trust has been established between the Check Point components, what is TRUE about name and IP-address changes?

- A. Security Gateway IP-address cannot be changed without re-establishing the trust
- B. The Security Gateway name cannot be changed in command line without re-establishing trust
- C. The Security Management Server name cannot be changed in SmartConsole without re-establishing trust
- D. The Security Management Server IP-address cannot be changed without re-establishing the trust

Answer: A

NEW QUESTION 228

The CDT utility supports which of the following?

- A. Major version upgrades to R77.30
- B. Only Jumbo HFA's and hotfixes
- C. Only major version upgrades to R80.10
- D. All upgrades

Answer: D

NEW QUESTION 229

You want to verify if there are unsaved changes in GAiA that will be lost with a reboot. What command can be used?

- A. show unsaved
- B. show save-state
- C. show configuration diff
- D. show config-state

Answer: D

NEW QUESTION 233

Phase 1 of the two-phase negotiation process conducted by IKE operates in _____ mode.

- A. Main
- B. Authentication
- C. Quick
- D. High Alert

Answer: A

Explanation:

Phase I modes

Between Security Gateways, there are two modes for IKE phase I. These modes only apply to IKEv1:

NEW QUESTION 234

Name the authentication method that requires token authenticator.

- A. SecureID
- B. Radius
- C. DynamicID
- D. TACACS

Answer: A

Explanation:

https://sc1.checkpoint.com/documents/R81/WebAdminGuides/EN/CP_R81_SecurityManagement_AdminGuide

NEW QUESTION 236

.....

Relate Links

100% Pass Your 156-215.81 Exam with Exam Bible Prep Materials

<https://www.exambible.com/156-215.81-exam/>

Contact us

We are proud of our high-quality customer service, which serves you around the clock 24/7.

Viste - <https://www.exambible.com/>